
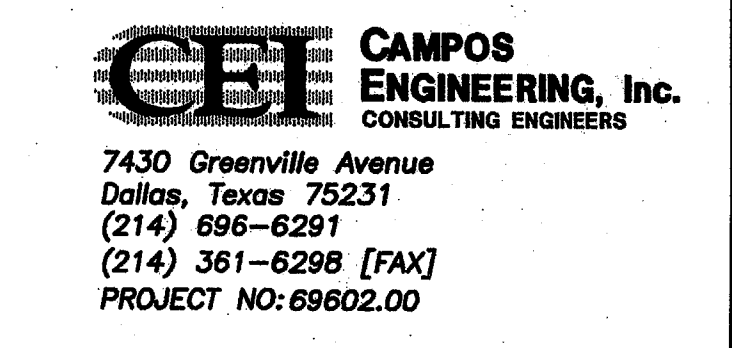


GENERAL NOTES



1. ALL INDOOR AND OUTDOOR RECEPTACLES SHALL BE HOODED "IN USE" WP/GFI.
2. REFERENCE ARCHITECTURAL DRAWINGS FOR EXACT LOCATION OF LIGHT FIXTURES.
3. REFERENCE ARCHITECTURAL DRAWINGS FOR LOCATION AND MOUNTING OF EXTERIOR PANELBOARDS AND CAMLOK EQUIPMENT.
4. ALL EMPTY CONDUITS SHALL HAVE PULL STRING AND BE CAPPED FOR FUTURE USE.
5. WHERE BRANCH CIRCUIT CONDUCTORS HAVE BEEN OVERSIZED TO MINIMIZE VOLTAGE DROP AND WHERE THE CONDUCTOR SIZE EXCEEDS THE TERMINAL SIZE OF A CIRCUIT BREAKER OR OTHER DEVICE, PROVIDE A WIRE SIZE TRANSITION SPLICE BOX. (REFER DETAIL 09 DRAWING E2-1) TRANSITION TO THE MAXIMUM WIRE SIZE COMPATIBLE WITH THE CIRCUIT BREAKER OR DEVICE UTILIZING A TERMINAL BLOCK MOUNTED IN A PROPERLY SIZED JUNCTION BOX LOCATED ADJACENT TO THE PANELBOARD.
6. ALL CONDUITS INCLUDING HOME RUNS ARE TO BE INSTALLED UNDER CONCRETE WALKWAYS AS SHOWN.
7. ALL OUTDOOR PANEL ENCLOSURES, SUPPORTS AND DEVICES ARE TO BE PAINTED TO MATCH ADJACENT SURFACE FINISH. ARCHITECT TO APPROVE PAINT AND COLOR SELECTION. REFER ARCHITECTURAL DRAWINGS AND SPECIFICATIONS.
8. ALL OUTDOOR RECEPTACLE COVER PLATES ARE TO BE PAINTED TO MATCH ADJACENT SURFACE FINISH. ARCHITECT TO APPROVE PAINT AND COLOR SELECTION. REFER ARCHITECTURAL DRAWINGS AND SPECIFICATIONS.
9. REFER TO LANDSCAPE ARCHITECT'S DRAWINGS FOR PROPER ORIENTATION OF ALL SITE LIGHTING FIXTURES.

NOTES BY SYMBOL "○"

- 1) PANEL "DPL2", REFER DETAIL 01 ON DRAWING E2-1 AND DRAWING E3-1 FOR ADDITIONAL INFORMATION.
- 2) PANEL "L4", REFER DETAIL 01 ON DRAWING E2-1 AND DRAWING E3-1 FOR ADDITIONAL INFORMATION.
- 3) CAMLOK PANEL #2, REFER DETAIL 01 ON DRAWING E2-1 AND DRAWING E2-1 FOR ADDITIONAL INFORMATION.
- 4) REFER TO DRAWING C2-2 FOR EXACT LOCATION.
- 5) NOT USED.
- 6) EXISTING LIGHTING FIXTURE SHOWN FOR INFORMATION ONLY.
- 7) NOT USED.
- 8) 3#10, 1#10G-3/4"C.
- 9) REFER TO SINGLE LINE DIAGRAM FOR WIRE AND CONDUIT SIZES. DRAWING NUMBER E2-1 DETAIL 01.
- 10) PROVIDE 120V DUPLEX RECEPTACLES (HOODED "IN USE" WP/GFI) IN BASE OF LIGHT FIXTURE POLE. MOUNTED +18" ABOVE TOP OF POLE BASE.
- 11) NOT USED.
- 12) 3#6, 1#10G-1"C. EACH. (2) 2P-30A CIRCUIT BREAKERS, FURNISH AND INSTALL #L1430R69W74 CORROSION RESISTANT RECEPTACLE, COVER AND GASKET WITH #28W CAP AT EACH LOCATION AS MANUFACTURED BY LEVITON OR APPROVED EQUAL.
- 13) TICKET BOOTH LOCATION 120V, 1#, 30A. SINGLE POINT CONNECTOR REQUIRED AT EACH LOCATION WITH NEMA 3R ENCLOSURE MOUNTED FLUSH WITH FINISHED GRADE. REFER DRAWINGS C4-1 AND C4-2 FOR EXACT LOCATIONS.
- 14) MOUNT PANEL FENCE. REFER DRAWING 2C-1.
- 15) EXISTING 200A, 208/120V, DISCONNECT SWITCH SERVING EXISTING STATURE LIGHTING. DISCONNECT AND REMOVE EXISTING FEED BACK TO SOURCE. PROVIDE NEW FEED FROM ELECTRICAL SERVICE AT PAVILION BUILDING. REFER TO SINGLE LINE DIAGRAM DETAIL 01 DRAWING E2-1. REFER TO CIVIL DRAWING FOR EXACT LOCATION.
- 16) 4#6, 1#10G-1 1/4"C.
- 17) PROVIDE 120V WP/GFI DUPLEX RECEPTACLES (HOODED "IN USE" WP/GFI) IN BASE OF LIGHT FIXTURE POLE. REFER ARCHITECTURAL DRAWING FOR MOUNTING HEIGHTS. MOUNTED +18" ABOVE TOP OF POLE BASE.
- 18) PANEL "L2", REFER DETAIL 01 ON DRAWING E2-1 AND DRAWING E3-1 FOR ADDITIONAL INFORMATION.
- 19) 2#8, 1#10G-3/4"C.
- 20) 2#10, 1#10G-3/4"C.
- 21) 2#6, 1#10G-1"C.
- 22) 2#12, 1#12G-3/4"C.
- 23) PANEL "H2", REFER DETAIL 02 ON DRAWING E2-1 AND DRAWING E3-1 FOR ADDITIONAL INFORMATION.
- 24) ROUTE 1" EMPTY CONDUIT WITH PULL STRING TO ELECTRICAL ROOM AT MAIN STAGE AREA FOR FUTURE USE. STUB CONDUIT UP AND CAP. TAG CONDUIT AS SPARE.
- 25) 3#8, 1#10G-1"C.
- 26) NOT USED.
- 27) NOT USED.
- 28) ROUTE 1" EMPTY CONDUIT WITH PULL STRING TO ELECTRICAL ROOM AT MAIN STAGE AREA FOR FUTURE USE. STUB CONDUIT UP AND CAP. TAG CONDUIT AS SPARE.
- 29) ALL STREET LIGHTS SHALL BE CONTROLLED BY PHOTOCELL/TIMELOCK WITH MANUAL OVERRIDE.
- 30) ALL SITE LIGHTING SHALL BE CONTROLLED BY PHOTOCELL/TIMELOCK WITH MANUAL OVERRIDE.
- 31) NOT USED.
- 32) NOT USED.
- 33) PROVIDE 1" EMPTY CONDUIT WITH PULL STRING TO TREE GROVE AREA. STUB CONDUIT UP AND CAP FOR FUTURE TREE UPLIGHTS.
- 34) EXISTING KIOSK SIGNS TO REMAIN. DISCONNECT EXISTING FEED AND REMOVE EXISTING FEED BACK TO SOURCE. PROVIDE NEW FEED FROM NEW ELECTRICAL SERVICE AND CONTROLS AT PAVILION AS INDICATED. REFER TO DETAIL 8 ON DRAWING C8-8.
- 35) 2 - 30KVA TRANSFORMERS, REFER DETAIL 01 ON DRAWING E2-1 FOR ADDITIONAL INFORMATION.
- 36) STREETLIGHT WITH TWIN HEADS, POST TOP MOUNTED FLOODLIGHT WITHOUT RECEPTACLE IN POLE BASE. REFER TO LANDSCAPE ARCHITECT'S DRAWINGS FOR MANUFACTURER AND MODEL NUMBER.
- 37) STREETLIGHT WITH TWIN HEADS WITH GFCI, W.P. RECEPTACLE IN POLE BASE. REFER TO LANDSCAPE ARCHITECT'S DOCUMENTS FOR MANUFACTURER AND MODEL NUMBER.
- 38) PROVIDE A SINGLE POLE TOGGLE SWITCH INSIDE LIGHTING CONTROL PANEL TO OPERATE FLOODLIGHTS. LABEL SWITCH "FLOODLIGHTS".

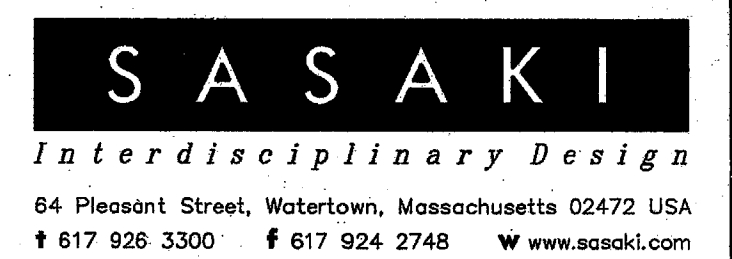

3	BULLETIN #2	03-10-03
	ISSUED FOR CONSTRUCTION	11-28-02
	ADDENDUM #2	10-21-02
	ISSUED FOR CONSTRUCTION	09-30-02
No.	Description	Date

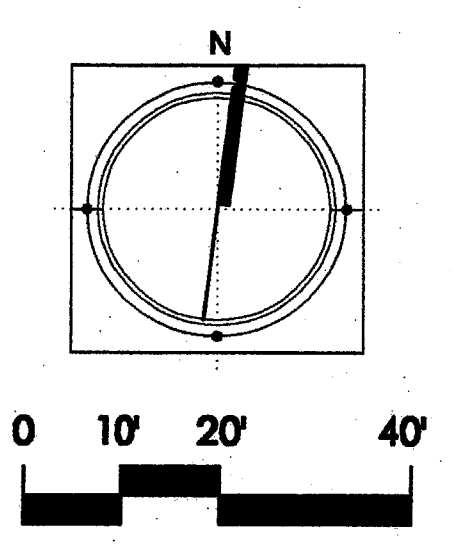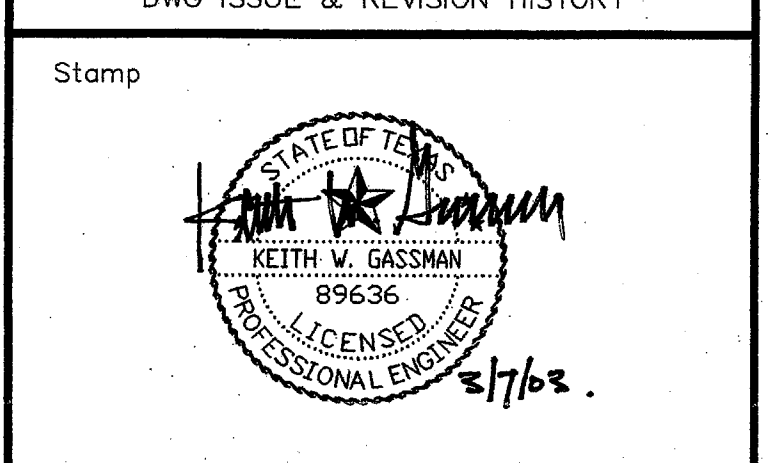

Project Title:
ADDISON ARTS & EVENTS DISTRICT
 ADDISON, TEXAS

Drawing Title:
ELECTRICAL PLAN - EAST

Project No. 14516.00 Scale: 1"=20'
 Drawn By: ARM
 Checked By: KG
 Approved By: KG
 Date: 09/30/2002

Drawing No. **E1-2**