

FIELD VERIFY CLEAR DIMENSION OF THEATRE AND REHEARSAL ROOM WALLS BEFORE FABRICATION OF REMOVEABLE JOISTS.

REMOVEABLE JOISTS & BEAMS

- CONTRACTOR TO PROVIDE MATERIAL AND LABOR TO ASSEMBLE COMPLETELY AND REMOVE ON LEVELS 2 AND LEVEL 3. ASSEMBLY SHOP DRAWING TO BE FURNISHED TO OWNER.
- ASSEMBLY SHOP DRAWINGS TO BE 1/4 SCALE DRAWING WITH SUFFICIENT DETAIL TO ILLUSTRATE ALL ASSEMBLY CONNECTIONS AND TO BE COORDINATED WITH AS-BUILT CONDITIONS.
- ALL FIELD CONNECTIONS TO BE BOLTED.

- PLAN NOTES:**
- FINISH FLOOR ELEVATION = 110'-0" (U.N.O.).
 - 109'-6 1/2" INDICATES TOP OF STEEL/BOTTOM OF DECK ELEVATION.
 - SEE SHEET "3.1.1" FOR GENERAL NOTES.
 - SEE SHEET "3.1.1" FOR TYPICAL DETAILS.
 - D1 INDICATES 1 1/2"-20 GAGE "TYPE B" METAL ROOF DECK.
 - D3 INDICATES 3" THICK NORMAL WEIGHT CONCRETE SLAB OVER .6"-28 GAGE METAL FORM DECK REINFORCED 6x6-W1.4xW1.4 W.W.F JOIST SPACING AT FLOOR DECK (D2) SHALL BE 2'-6" CC (MAX.) AND SPACING AT ROOF DECK (D1) SHALL BE 4'-0" CC (MAX.) LOCATE A JOIST ON COLUMN CENTERLINE. JOISTS TO BE EQUALLY SPACED BETWEEN COLUMN CENTERLINES.
 - BRIDGING PER STEEL JOIST INSTITUTE SPECIFICATIONS.
 - "JX" INDICATES "SPECIAL JOIST DESIGN" SEE SHEET "3.1.1" FOR SCHEDULE.
 - SEE TYPICAL DETAIL "03"/3.5.1 FOR CMU WALLS - TYPE "W1" U.N.O.
 - JOISTS NOT NOTED OTHERWISE TO BE 2.5VS1.
 - "L1" INDICATES LINTEL TYPE SEE DETAIL AND SCHEDULE "10"/3.5.1 FOR INFO. TYPE "L1" TO BE TYPICAL U.N.O..


NOTE: WALL TO BE BUILT AFTER CONSTRUCTION OF POST-TENSIONING DISK IS COMPLETED. SEE SHEET 3.3.2 FOR DISK INFO.

01 LEVEL 2 FRAMING PLAN
SCALE: 1/8"=1'-0"

ROOFTOP EQUIP. SCH.

| UNITS | |
|-------|-----------|
| MARK | WEIGHT |
| 1 | 965 LBS. |
| 2 | 1085 LBS. |
| 3 | 1675 LBS. |
| 4 | 575 LBS. |
| 5 | 8505 LBS. |
| 6 | 9520 LBS. |

NOTIFY ENG'R IF WEIGHT AND/OR LOCATION DIFFER FROM WHAT SHOWN

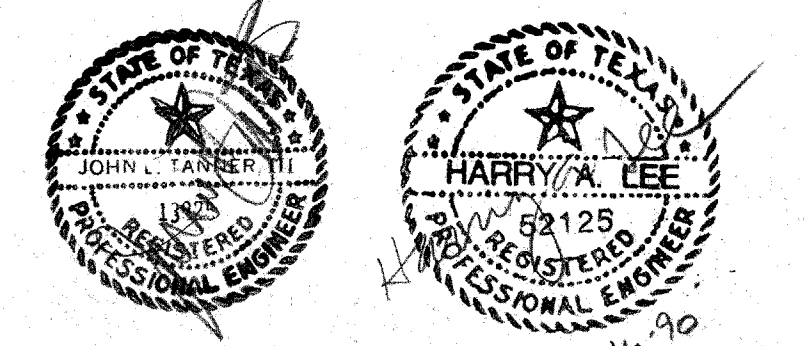

ACC ACT

ADDISON

| OWNER | LANDSCAPE | STRUCTURAL | HISTORIAN | Issue | Category | Subcategory | Sheet |
|---|--|---|---|------------------------|----------|-------------|-------|
| The Kallans Group 31778-417 | The Kallans Group 31778-417 | Elfor Turner 214-367-6333 | Alan Mason 214-687-782 | ISSUE FOR BID: 8-17-90 | 3 | 2 | 5 |
| ARCHITECT Cunningham Architects 2700 Fairmount Dallas, Texas 75201 214-855-5272 | THEATRE CONSULTANT Theatre Projects 202-437-3949 | M.E.P. MEP Systems 214-754-4741 | LIGHTING Fennell Hill Wilson 214-523-6542 | | | | |
| INTERIORS DGS 718-962-2000 | CIVIL Kurtz & Associates 214-690-3322 | GRAPHICS Nettural Design 214-564-1978 | | | | | |