


01 POOL FOUNDATION PLAN
 1/16"=1'-0"

LEGEND:
 ○ = POOL SEQUENCE
 C.J. = CONTROL JOINT

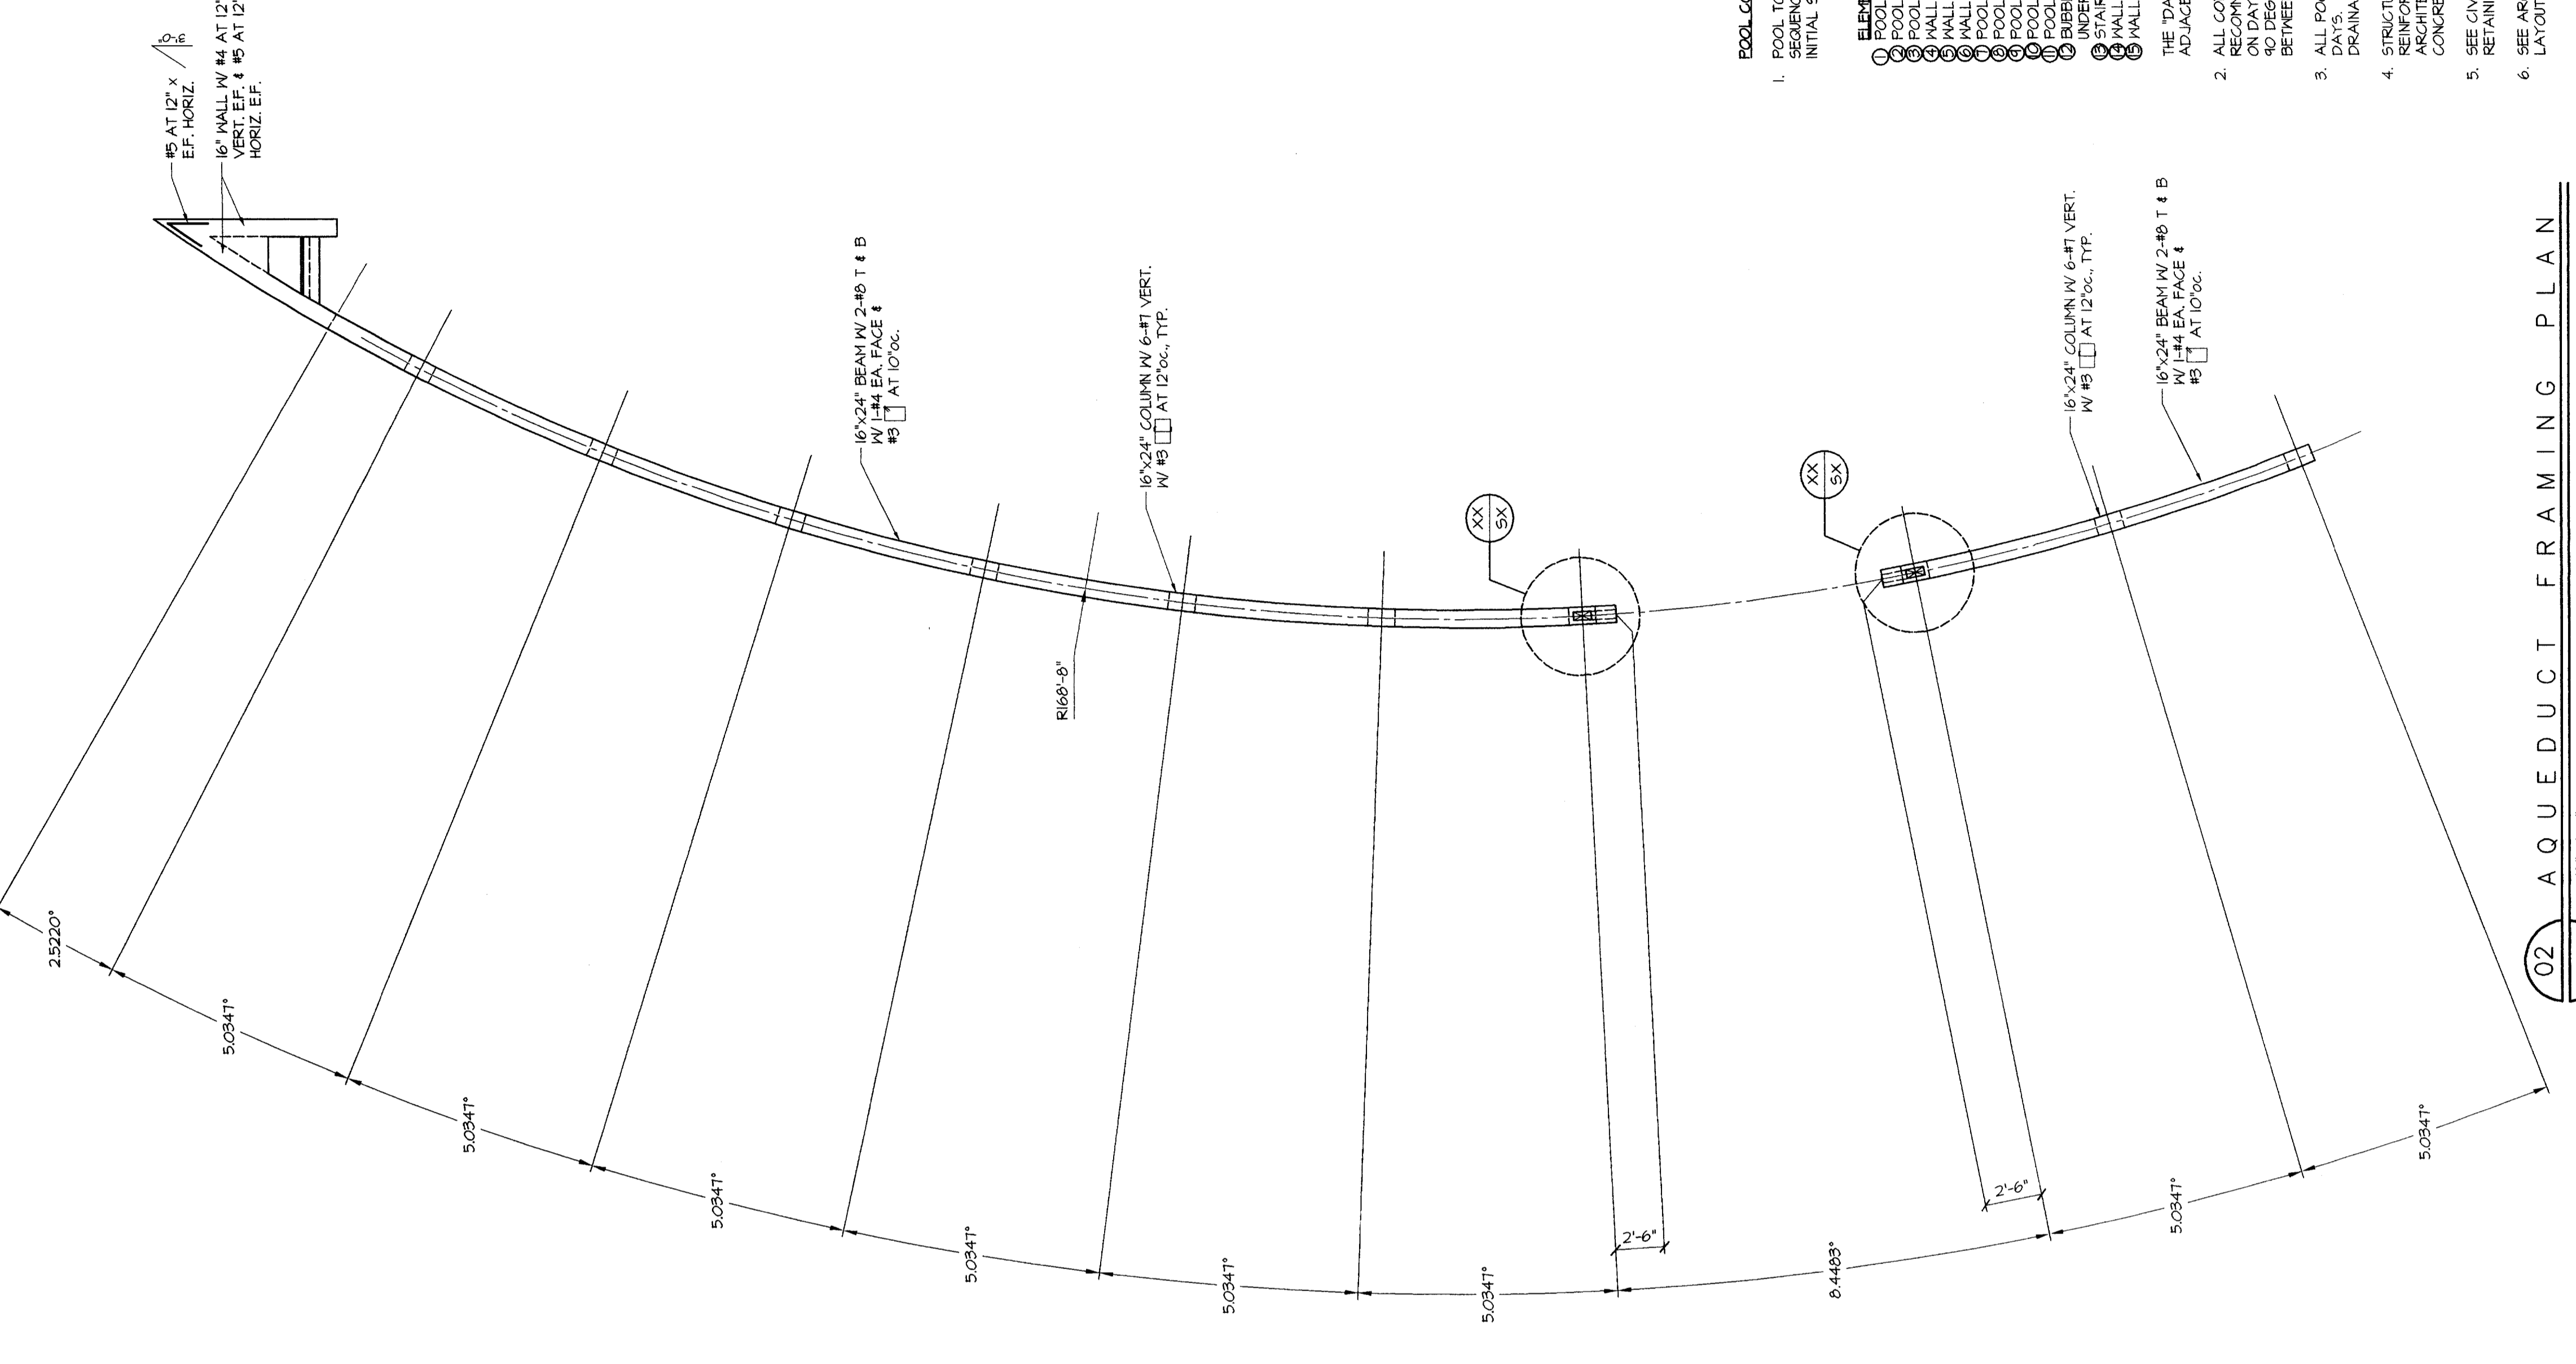

02 AQUEDUCT FRAMING PLAN
 1/16"=1'-0"

POOL CONSTRUCTION GENERAL NOTES

- POOL TO BE CONSTRUCTED IN NORMAL EXPOSURE THAT ARE SPECIFIED WITH ASSURE THE POOL CONCRETE TO CURE AND INITIAL SHRINKAGE TO TAKE PLACE.
- ALL CONCRETE PLACED SHALL FOLLOW HOT & COLD WEATHER RECOMMENDED PRACTICES. IN ADDITION, ANY CONCRETE POURED ON DAYS ANTICIPATED TO HAVE A DAILY HIGH TEMPERATURE OF 85°F OR HIGHER AND A DAILY LOW TEMPERATURE OF 35°F OR LOWER SHALL BE COVERED WITH INSULATION BETWEEN 10 P.M. AND 3 A.M.
- ALL POOL CONCRETE TO BE CONTINUOUSLY SET CURED FOR 28 DAYS. CONTRACTOR TO PROVIDE ADEQUATE MEANS OF DRAINAGE.
- STRUCTURAL DRAWINGS PRIMARY PURPOSE IS TO INDICATE REINFORCING REQUIRED. COORDINATE WALL, POOL, AND AQUEDUCT DRAWINGS FOR ALL REINFORCING DETAILS AND CONCRETE PROFILES.
- SEE CIVIL DRAWINGS FOR ALL SITE PAVING, STAIRS, AND RETAINING WALLS NOT SPECIFICALLY DETAILED ON STRUCTURAL LAYOUT.

DATE CAST (DAYS)

ELEMENT	DATE CAST (DAYS)
POOL BOTTOM	1
POOL WALL	30
POOL BOTTOM	32
POOL WALL	32
POOL BOTTOM	60
POOL WALL	60
POOL MALL	62
UNDERWATER STAIR	62
UNDERWATER BENCH	62
POOL MALL	62
POOL MALL	80

DRAWING INDEX	
GENERAL NOTES	S1.01
DEMO PLAN	S2.00
TYPICAL FOUNDATION DETAILS	S3.01
PIER SCHEME	S3.01
TYPICAL POOL DETAILS	S5.02
TYPICAL CHU DETAILS	S4.01
TYPICAL FLOOR DETAILS	S5.01
TYPICAL ROOF DETAILS	S6.01