



## LEGEND



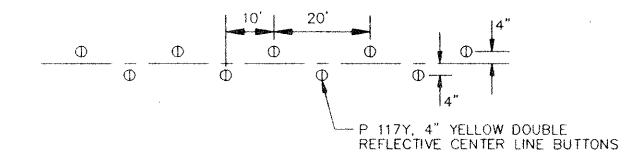

install new traffic detector quadrupole loops with the dimensions shown

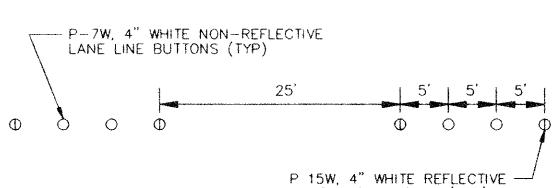

TWO-WAY DIVIDE LINE

LEFT/RIGHT TURN LANE

6"x6" REFLECTIVE JIGGLE BARS -

P 15W, 4" WHITE REFLECTIVE — LANE LINE BUTTONS (TYP)

NORMAL LANE LINE


SHEETS

JOB NO. 13921

## NOTE

- ALL PAVEMENT MARKINGS SHALL BE INSTALLED IN ACCORDANCE
  WITH THE TEXAS MANUAL OF UNIFORM TRAFFIC CONTROL DEVICES.
- 2. NO CERAMIC TRAFFIC BUTTONS ARE TO BE PLACED ON THERMOPLASTIC STRIPING. CONTRACTOR SHALL PROVIDE AN OPENING IN ANY CONTINUOUS STRIPING TO ALLOW FOR PROPER PLACEMENT OF TRAFFIC BUTTONS, IF REQUIRED.
- 3. ADHESIVE FOR BUTTONS SHALL BE TWO-PART EPOXY MACHINE MIX.
- 4. NO SPLICING OF TRAFFIC SIGNAL CABLE SHALL BE ALLOWED.
- 5. THE CONTRACTOR SHALL RECONNECT ALL SIGNAL INTERCONNECT AND EMERGENCY VEHICLE CABLE TO THE RELOCATED CONTROLLER SO AS TO DUPLICATE EXISTING SIGNAL PHASING, DETECTOR OPERATION, PEDESTRIAN PHASING, INTERCONNECT AND EMERGENCY VEHICLE PHASING EXCEPT AS NOTED ON THE PLANS. NEW CONDUIT SHALL BE INSTALLED WHERE NECESSARY TO ACCOMMODATE RELOCATED PULL BOXES AND CONTROLLERS. SAID CONDUIT SHALL BE INSTALLED IN SUCH A MANNER SO AS TO ALLOW EASY PULLING OF SIGNAL CABLE THROUGH THE NEW CONDUIT.

rie de minima de missori				
				DESIGNED BY: J WALDBAUER
3				DRAWN BY: EH&A
				CHECKED BY: B GRANTHAM
				SCALE:1" = 20'
				DATE: <u>DECEMBER, 1993</u>
10.	REVISION	BY	DATE	FILE: <u>\ADDISON\PROJECT3\PMML</u>

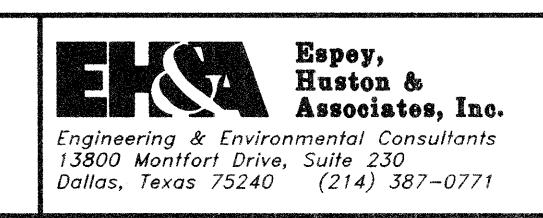

PAVEMENT MARKING/TRAFFIC SIGNAL PLAN	SHEET N	ļ
INTERSECTION IMPROVEMENTS MIDWAY ROAD AT LINDBERG DRIVE	OF .	Á
4 m m		200

THE TOWN OF ADDISON