

REFLECTIVE RAISED PAVEMENT MARKERS FOR VEHICLE POSITIONING GUIDANCE

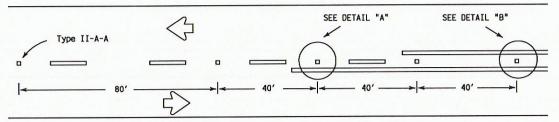



CENTERLINE FOR ALL TWO LANE ROADWAYS

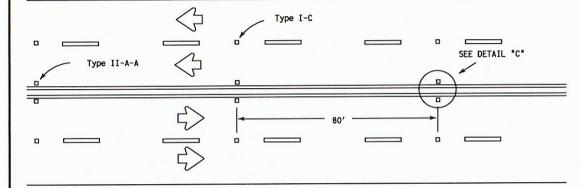


CENTERLINE & LANE LINES FOR FOUR LANE TWO-WAY HIGHWAYS

Raised pavement marker Type I-C, clear face toward normal traffic, shall be placed on 80-foot centers.

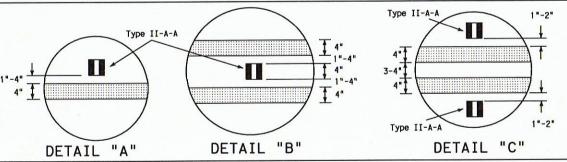

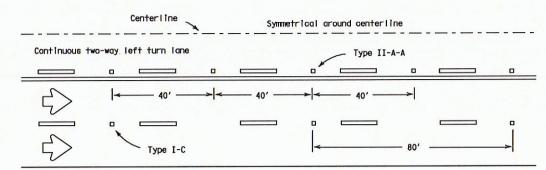


CENTERLINE AND LANE LINES FOR TWO-WAY LEFT TURN LANE

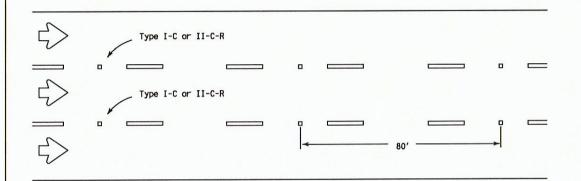

LANE LINES FOR ONE-WAY ROADWAY (NON-FREEWAY FACILITIES)

Raised pavement markers Type II-C-R shall have clear face toward normal traffic and red face toward wrong-way traffic.

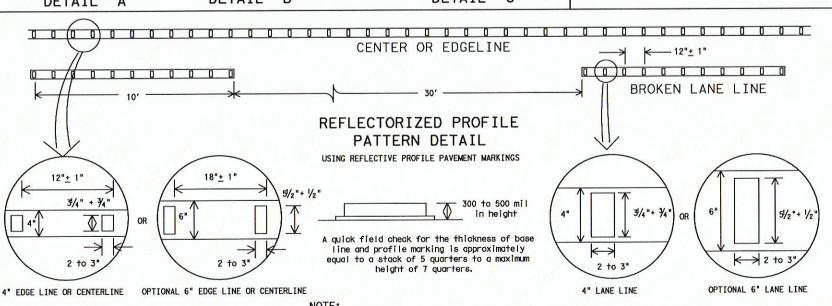

Profile markings shall not be placed on roadways with a posted speed limit of 45 MPH or less.

GENERAL NOTES


- 1. All raised pavement markers placed in broken lines shall be placed in line with and midway between
- 2. On concrete pavements the raised pavement markers should be placed to one side of the longitudinal joints.




Digitally Signed 05/04/2015


MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
TRAFFIC PAINT	DMS-8200
HOT APPLIED THERMOPLASTIC	DMS-8220
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240

All pavement marking materials shall meet the required Departmental Material Specifications as specified by the plans.



Type I (Top View)





RAISED PAVEMENT MARKERS



Texas Department of Transportation Traffic Operations Division

POSITION GUIDANCE USING RAISED MARKERS REFLECTORIZED PROFILE MARKINGS

PM(2)-12

© TXDOT April 1977	DN: TX	DOT	CK: TXDOT	DW: TXDOT	CK: TXDOT
REVISIONS 4-92 2-10 5-00 2-12 8-00 2-08	CONT	SECT	JOB		HIGHWAY
	DIST		COUNTY		SHEET NO.