

LEGEND

- R&S REMOVE AND SALVAGE
- R&D REMOVE AND DISPOSE
- R&D ASPHALT PAVING & SUBBASE MATERIAL
- R&D GRAVEL PAVING
- R&D CONCRETE PAVING AND SUBBASE MATERIAL
- R&S BRICK PAVERS; R&D SUBBASE MATERIAL
- TREE TO BE PROTECTED
- SILT FENCE
- R&D CATCH BASIN
- LIMIT OF WORK


SEE GENERAL NOTES, SHEET C1-2

- GENERAL NOTES**
1. REMOVE AND DISPOSE OF ALL CHAIN LINK FENCE AND GATES.
 2. REMOVE AND SALVAGE ALL SIGNS AS DIRECTED BY OWNERS AND AT NO EXTRA PAY.
 3. ALL TREES AND OTHER VEGETATION NOT INDICATED TO BE PROTECTED SHALL BE REMOVED AND DISPOSED OF AFTER APPROVAL BY TOWN.
 4. REMOVE AND SALVAGE ALL METAL HOOP EDGING AROUND STREET TREE PLANTERS ON QUORUM DRIVE AND ADDISON CIRCLE DRIVE.
 5. REMOVE ALL PLANTING, OTHER THAN TREES, IN SIDEWALK PLANTERS ALONG QUORUM DRIVE AND AT ADDISON CIRCLE DRIVE. TREES SHALL NOT BE DAMAGED.
 6. REMOVE AND SALVAGE ALL STREET LIGHT FIXTURES (WHITE PAINTED FINISH) ALONG ADDISON CIRCLE DRIVE, REMOVE AND DISPOSE OF ALL FOUNDATIONS, CONDUIT, HANDHOLES, ETC. FOR THOSE FIXTURES.
 7. CONCRETE CURB AND GUTTER TO BE R&D SHALL BE REMOVED BETWEEN ARROWS INDICATING LIMITS.
 8. CONTRACTOR SHALL CONTACT TESS/OWNER REGARDING ALL UTILITIES PRIOR TO ANY DEMOLITION.
 9. THE CONTRACTOR SHALL INSPECT SILT FENCE AND HAYBALES WEEKLY, AND AFTER MAJOR RAIN EVENTS, TO ENSURE THAT THE DEVICE IS FUNCTIONING PROPERLY, AND MAINTAIN IT IN ACCORDANCE WITH NCTCOG ITEM 3.1.2.
 10. THE CONTRACTOR SHALL REMOVE SEDIMENT FROM BEHIND SILT FENCE WHEN THE DEPTH OF SEDIMENT HAS BUILT TO ONE THIRD THE HEIGHT OF THE FENCE ABOVE GRADE.
 11. THE CONTRACTOR SHALL INSPECT THE BASE OF THE FENCE TO ENSURE THAT NO GAPS HAVE DEVELOPED AND RETRENCH IF NECESSARY.
 12. THE CONTRACTOR SHALL INSPECT FENCE POSTS TO ENSURE THAT THEY ARE PROPERLY SUPPORTING THE FENCE. IF NECESSARY, THE CONTRACTOR SHALL RESET AND ADD POSTS.
 13. IF FILTER FABRIC IS RIPPED, DAMAGED, OR DETERIORATED, THE CONTRACTOR SHALL REPLACE IT IN ACCORDANCE WITH THE ORIGINAL SPECIFICATIONS AND DETAILS (MAINTENANCE OF THE SILT FENCE SHALL BE AT THE CONTRACTOR'S OWN EXPENSE).
 14. TOWN OF ADDISON TO R&S ALL IRRIGATION HEADS, VALVES, BOOSTER PUMP, AND OTHER EQUIPMENT FROM AREAS TO BE DISTURBED. CONTRACTOR TO R&D ALL RELATED IRRIGATION PIPING. IRRIGATION PIPING, HEADS, VALVES, ETC. IN EXISTING TREE PITS TO REMAIN SHALL BE PROTECTED.
 15. ALL EXCAVATION SHALL BE UNCLASSIFIED. REFER TO GEOTECHNICAL REPORT, SPECIFICATION, APPENDIX A.
 16. ALL SALVAGED ITEMS ARE TO BE DELIVERED TO THE TOWN OF ADDISON, KELLWAY LIFT STATION, 4245 KELLWAY CIRCLE, ADDISON, TX 75001.

ADDENDUM #2	10-21-02
ISSUED FOR CONSTRUCTION	09-30-02
No. Description	Date

DWG ISSUE & REVISION HISTORY

Stamp

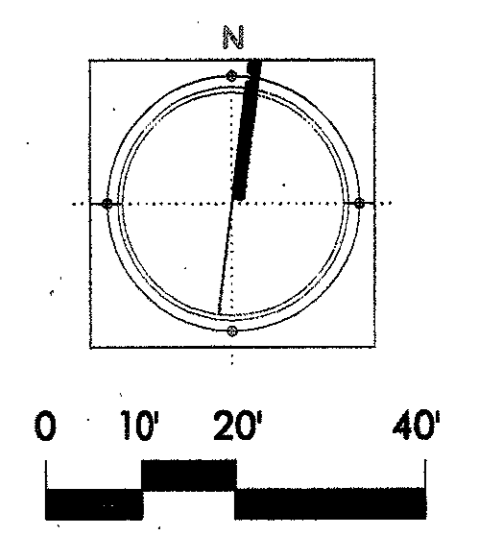

Project Title:
ADDISON ARTS & EVENTS DISTRICT
 ADDISON, TEXAS

Drawing Title:
SITE PREPARATION/DEMOLITION/EROSION CONTROL PLAN

Project No. 14516.00 Scale: 1"=20'-0"
 Drawn By: SM
 Checked By: TC
 Approved By: SEH
 Date: September 30, 2002

Drawing No. **C1-2**