


TAXIWAY


SECTION

NO SCALE

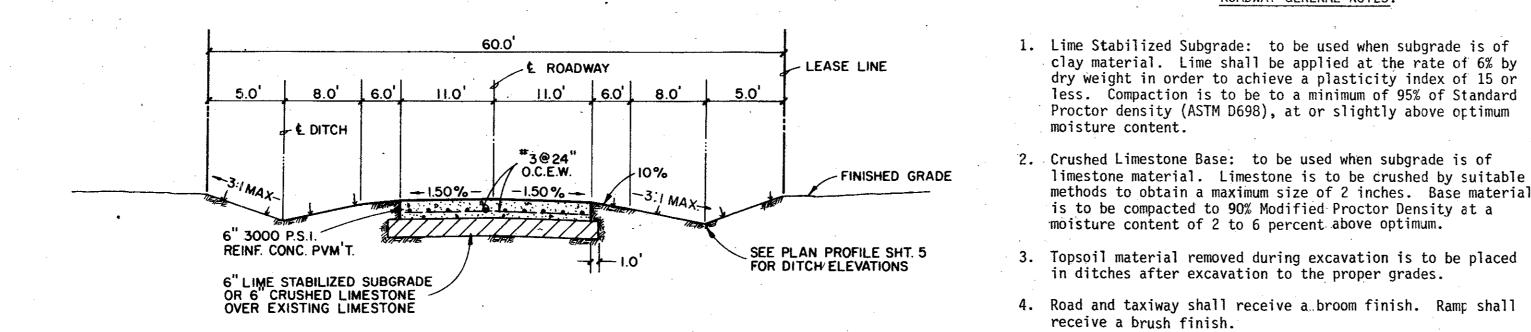


ROADWAY

NO SCALE

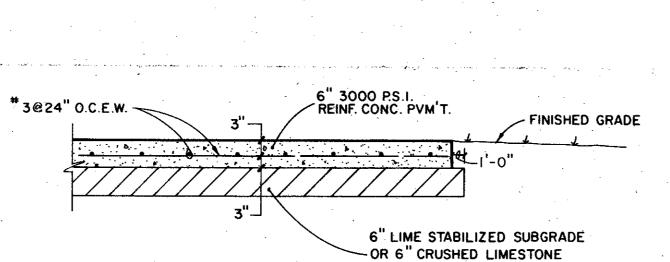


OVER EXISTING LIMESTONE

RAMP NO SCALE

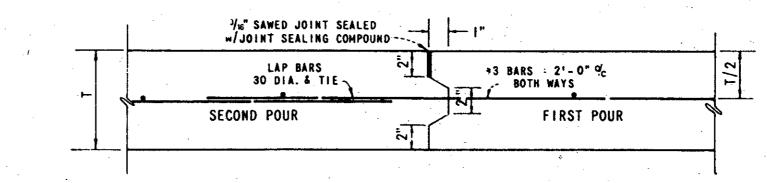

CONSTRUCTION JOINT

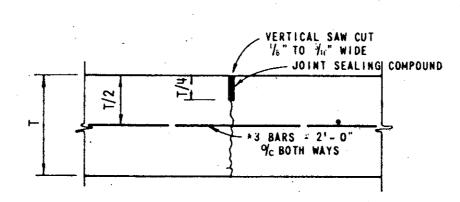


SAWED DUMMY JOINT

20' MAXIMUM SPACING

ROADWAY GENERAL NOTES:

limestone material. Limestone is to be crushed by suitable methods to obtain a maximum size of 2 inches. Base material

is to be compacted to 90% Modified Proctor Density at a moisture content of 2 to 6 percent above optimum.

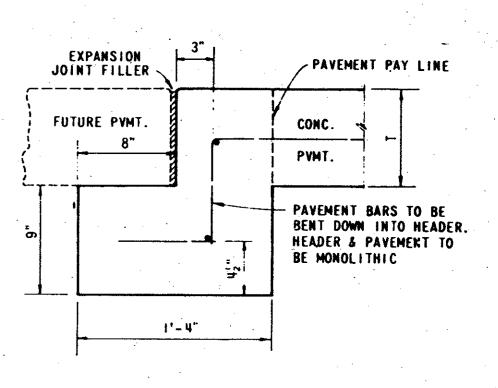


STREET HEADER

CONCRETE CONSTRUCTION GENERAL NOTES


Steel chairs approved by the Engineer shall be used to support reinforcing steel and shall be placed at the intersection of longitudinal and transverse bars at 4'-0" spacing.

Pavement layout will necessitate that all construction and warping joints coincide with lane lines. Thru lane construction will be continuous with all left turn lanes and transitions to be poured as fill-ins subject to approval by the Engineer.

Contractor shall provide transverse construction joint similar in detail to longitudinal construction joint or expansion joint at the end of each days pour or when directed by the Engineer.

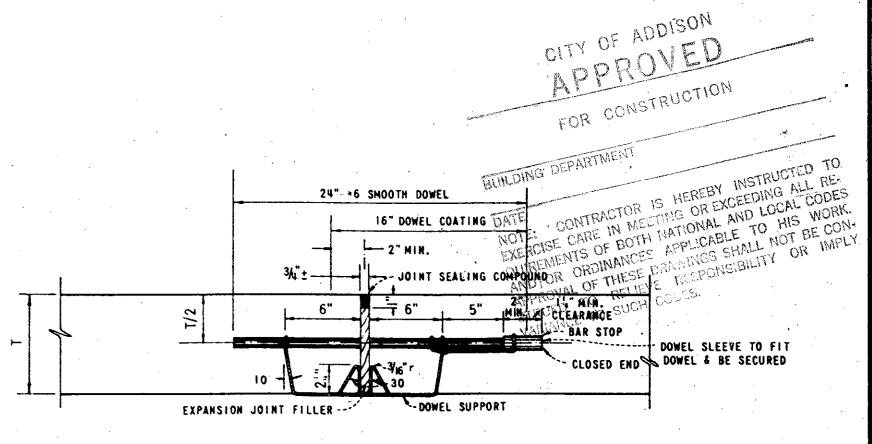

TRANSVERSE EXPANSION JOINT

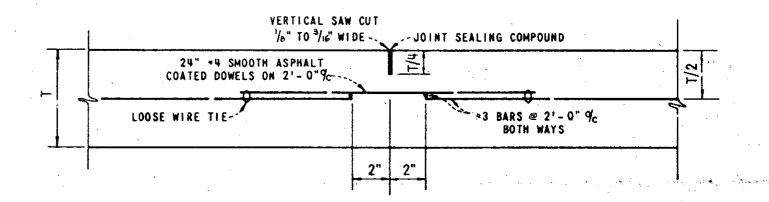

TRANSVERSE CONTRACTION JOINT

JOB NO. 81-3600

(60 FT. MAX. SPACING)



ROADWAY SEC	TIONS
PAVING DETA	AILS
NORTH 40 - PHASE II	
ADDISON MUNICIPAL	AIRPORT
Riewe & Wischmeyer, Onc.	DESIGNED T.K.
CONSULTING ENGINEERS	DRAWN R.W.C.
DALLAS TEXAS	DATE CEDT 1092

NO SCALE