

REMOVE ALL EXISTING IMPROVEMENTS (BUILDINGS, PAVING WALKS ETC.) WITHIN AREA INDICATED BY HATCHING. COORDINATE REMOVAL OF EXISTING UTILITY SERVICES WITH UTILITY COMPANIES (REFER TO UTILITY PLAN ALSO)

EXISTING FIRE HYDRANT TO REMAIN IN PLACE

EXISTING GRATE INLET BOXES TO BE REMOVED. REFER TO STORMDRAIN PLANS FOR MORE DETAILS.

EXISTING TELEPHONE JUNCTION BOX TO BE REMOVED OR RELOCATED. COORDINATE WITH TELEPHONE CO.

EXISTING GRATE INLET BOX AND 15" RCP TO BE REMOVED. REFER TO STORMDRAIN PLANS FOR MORE DETAILS.

EXISTING GRATE INLET BOX AND 15" RCP TO BE REMOVED. REFER TO STORMDRAIN PLANS FOR MORE DETAILS.

REMOVE EXISTING CHAIN LINK FENCE UP TO THIS POINT

EXISTING HYDRANT AND VALVES TO BE REMOVED AND SALVAGED TO THE TOWN OF ADDISON. CAP 6" WATER

EXISTING LIGHT POLE AND OVERHEAD SERVICE LINE TO BE REMOVED

EXISTING POWER POLE AND TRANSFORMERS TO BE REMOVED. COORDINATE WITH ELECTRIC CO.

GAS METER TO BE REMOVED. COORDINATE WITH GAS CO.

EXISTING CLEANOUT TO REMAIN IN PLACE (TOP TO BE ADJUSTED)

EXISTING SEWER MANHOLE TO REMAIN IN PLACE (TOP TO BE ADJUSTED)

EXISTING CHAIN LINK FENCE TO REMAIN IN PLACE


REMOVE EXISTING CHAIN LINK FENCE UP TO THIS POINT

CUT AND CAP EXISTING SANITARY SEWER SERVICE. INSTALL DOUBLE CLEAN-OUT.


REMOVE 20 LF OF EXISTING CURB FOR NEW DRIVE RETURN CONSTRUCTION

NOTES:

1. DEMOLITION CONTRACTOR TO BE FAMILIAR WITH ALL PROPOSED CONSTRUCTION PLANS BEFORE ANY SITE DEMOLITION COMMENCES.
2. COORDINATE ALL SITE DEMOLITION WITH THE ARCHITECT AND ALL UTILITY CONTRACTORS.
3. DEMOLITION CONTRACTOR TO LOCATE ALL UNDERGROUND UTILITIES PRIOR TO ANY DEMOLITION WORK. CONTACT UTILITY COMPANIES AT LEAST 2 WORKING DAYS PRIOR TO ANY DEMOLITION WORK.
4. CONTACT THE TOWN OF ADDISON FINANCE DEPARTMENT AT 972-450-1080 TO DISCONNECT WATER SERVICE PRIOR TO DEMOLITION OF THE ONMIFLIGHT BUILDING.

 INDICATES EXISTING IMPROVEMENTS TO BE REMOVED

REVISIONS:	
6/04/08	CITY COMMENTS
7/25/08	CITY COMMENTS

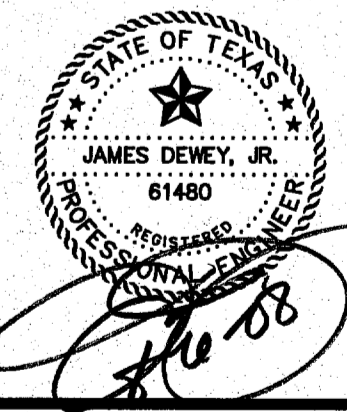

SHEET TITLE:
DEMOLITION PLAN
 HANGER ADDITION PLANS FOR
 EXECUTIVE HANGAR OWNERS ASSOCIATION OF ADDISON
 ADDISON AIRPORT
 ADDISON, TEXAS

PREPARED BY:
JDJR ENGINEERS AND CONSULTANTS
 ENGINEERS • SURVEYORS • LAND PLANNERS
 2500 Texas Drive Suite 100 Irving, Texas 75062
 Tel: 972-252-5357 Fax: 972-252-9858

DATE: APR. 8, 2008 DRAWN BY: SAS SHEET NO.
 SCALE: 1" = 30' CHECKED BY: JDJR **C2** OF 10