


**UNDERGROUND FIRE LINE GENERAL NOTES**

1. ALL UNDERGROUND MATERIALS AND INSTALLATION TO CONFORM TO N.F.P.A. #24 AND THE TOWN OF ADDISON.
2. ALL PIPE SHALL BE C-900 DR 14 PVC, FIRE RISER INTO BUILDING SHALL BE DUCTILE IRON PIPE, ALL EXPOSED NUTS, BOLTS AND PIPE SHALL BE TAR COATED, POLY WRAP FITTINGS AND DUCTILE PIPE.
3. EMBEDMENT, TRENCH BACKFILL AND CONCRETE THRUST BLOCKS SHALL CONFORM TO N.F.P.A. #24, THE TOWN OF ADDISON AND NTCOG SPECIFICATIONS.
4. ALL NEW UNDERGROUND PIPING TO BE HYDROSTATICALLY TESTED AT 200 PSIG FOR A MINIMUM OF 2 HOURS.
5. ALL NEW UNDERGROUND TO BE FLUSHED IN ACCORDANCE WITH N.F.P.A. #24.
6. ALL PIPING SHALL BE U.L. LISTED FOR FIRE PROTECTION.

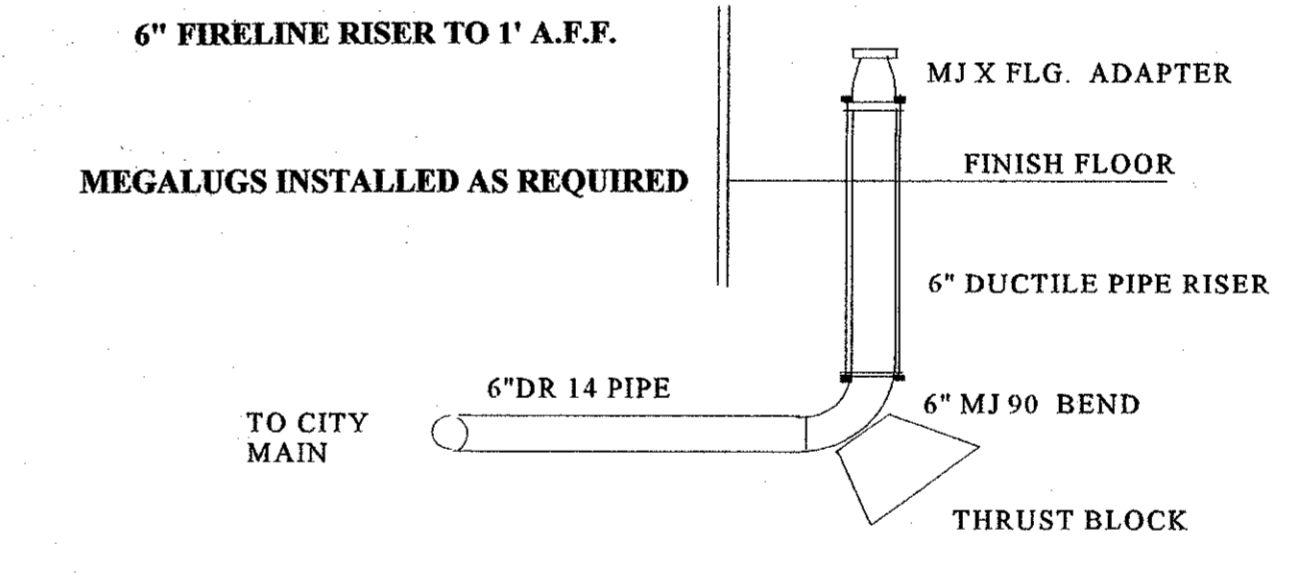

**Riser detail**

**1 SITE PLAN**  
 SCALE: 1/16" = 1'-0"

**CONSTRUCTION SET**  
 ISSUED BY  
 TOWN OF ADDISON  
 PUBLIC WORKS DEPARTMENT  
 NAME: *Ken Chubb* DATE: 11/14/02

SOUTHERN SCR-0372 MECHANICAL PLUMBING INC 400 SOUTH ASTON SUNNYVALE, TEXAS 75182 972-226-2460 FAX 972-226-2480		<b>F1</b>
TITLE: UNDERGROUND FIRE LINE		
RME # 0454 HERBERT G WEINSTEIN <i>Herbert G Weinstein</i>		
PROJECT: START INTERNATIONAL 4720 AIRBORN DRIVE ADDISON, TEXAS 75001 LOT 3R, BLOCK A SOJOURN PLAZA ADDITION DALLAS COUNTY		
REVISIONS		
DATE: November 13, 2002	BY: EWS	JOB # 795
BUILDING PERMIT # 5924		

**Start International**  
 Airborn Drive  
 Addison, Texas