


TYPICAL ELEVATION

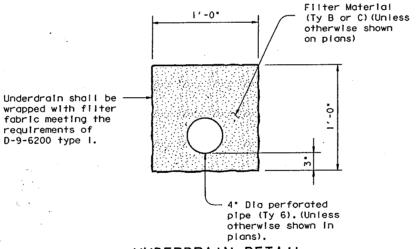

UNDERDRAIN DETAIL

- For systems utilizing continuous structural plns passing thru a minimum of 3 block layers, the minimum block depth shall be 8°. The maximum vertical spacing of primary reinforcement on these systems shall be 24°, and intermediate reinforcement will not be required.
- ② Unless noted elsewhere in the plans, 1'-0" minimum cover shall be provided from the top of leveling pad to finish grade.
- 3 For walls which are designated as landscape walls and are less than 6' tall, the following modifications to the design criteria will be allowed:

Factor of safety in sliding > 1.2. Factor of safety in overturning > 1.5. Connection strength factor of safety of 1.0 at 3/4° strain. Minimum earth reinforcement length of 4'.

The above modified criteria does not apply to walls over 6' tall regardless of designation.

FARTH REINFORCEMENTS:

Walls may be constructed without earth reinforcements if all stability criteria are met with the blocks alone. If all stability criteria are not satisfied, earth reinforcements shall be provided.

The long term design strength (LTDS) of earth reinforcement shall be calculated in accordance. with AASHTO 1992 Standard and current Interim Specifications.

Soll-geogrid pullout coefficient values shall be determined in accordance with Geosynthetics Research Institute (GRI) Method GG-5, "Guidelines for Evaluating Geogrid Pullout".

For the combination of concrete block and geogrid chosen, connection strength data shall be provided. The allowable connection load shall be limited to the connection strength developed at 1/4 displacement, divided by a 1.5 safety factor. 3

For Internal stability calculations, the failure plane will be assumed to originate at the back of the concrete blocks.

The factor of safety against pullout of the earth reinforcements shall be determined from test data evaluated at 1/4" strain.

The maximum vertical spacing of primary earth reinforcement layers shall be 40 inches. The minimum length of primary earth reinforcements shall be 8 feet, measured from the front of the blocks. 3

A layer of intermediate reinforcement shall be provided between primary reinforcements when the spacing between primary layers exceeds twice the horizontal depth of the concrete block unit. Intermediate reinforcement shall have a minimum length of 4 feet, and shall provide local stabilty for the concrete block units. ①

STABILITY CRITERIA:

Factor of safety in sliding along the base of the structure shall be greater than or equal to 1.5. ③ Factor of safety in overturning shall be greater than or equal to 2.0. ③

The base pressure resultant shall fall within the middle third of the retaining wall.

DESIGN PARAMETERS:

Structure shall be based on the following design parameters

Random Backfill: Unit weight = 120 pcf. (Embankment or Existing Soils) # = 30° c = 0 psf Select Backfill: Unit weight = 120 pcf . ø = 34° c = 0 psf

GENERAL NOTES:

Sections and Typical Elevation shown are for Informational purposes only. Specific geometry is to be determined based on wall layouts and other plan information.

Unless otherwise shown in the plans, wall batter shall be a maximum of 3" per foot. Blocks shall be placed horizontally, and a positive means of obtaining batter such as pins, keyways, or concrete lips shall be provided.



Texas Department of Transportation Design Division (Bridge)

CONCRETE BLOCK RETAINING WALL

RW(CB)

		111111001						
FILE: rwestdll.dgn		DN: MPM	CK+ JGG	DW: KDK	DW: KDK CK: 1		STD+ 8480	
ORIG DATE	MARCH 1996	DIST	FED REG	FEDER/	L AID PI	ROJECT	•	SHEET
	REVISIONS .	18	. 6	CMC	17(44	19)		90
٠.			COUNTY		CONTROL	SECT	JOB	HICHWAY
	•		ALLA	5	8050	18	34	CS