

BEAM 1			
PT. NO.	DISTANCE TO POINT	DEFL.	SURFACE ELEVATION
1	0.0000	0.00	631.00
2	10.2161	0.05	630.84
3	20.4322	0.08	630.69
4	30.6482	0.11	630.53
5	40.8643	0.12	630.38
6	51.0804	0.13	630.22
7	61.2965	0.12	630.07
8	71.5126	0.11	629.91
9	81.7287	0.08	629.76
10	91.9447	0.05	629.60
11	102.1608	0.00	629.44

BEAM 2			
PT. NO.	DISTANCE TO POINT	DEFL.	SURFACE ELEVATION
1	0.0000	0.00	631.05
2	10.2161	0.05	630.90
3	20.4322	0.08	630.74
4	30.6482	0.11	630.59
5	40.8643	0.12	630.43
6	51.0804	0.13	630.28
7	61.2965	0.12	630.12
8	71.5126	0.11	629.97
9	81.7287	0.08	629.81
10	91.9447	0.05	629.66
11	102.1608	0.00	629.50

BEAM 3			
PT. NO.	DISTANCE TO POINT	DEFL.	SURFACE ELEVATION
1	0.0000	0.00	631.11
2	10.2161	0.05	630.96
3	20.4322	0.08	630.80
4	30.6482	0.11	630.64
5	40.8643	0.12	630.49
6	51.0804	0.13	630.33
7	61.2965	0.12	630.18
8	71.5126	0.11	630.02
9	81.7287	0.08	629.87
10	91.9447	0.05	629.71
11	102.1608	0.00	629.56

BEAM 4			
PT. NO.	DISTANCE TO POINT	DEFL.	SURFACE ELEVATION
1	0.0000	0.00	631.17
2	10.2161	0.05	631.01
3	20.4322	0.08	630.86
4	30.6482	0.11	630.70
5	40.8643	0.12	630.55
6	51.0804	0.13	630.39
7	61.2965	0.12	630.23
8	71.5126	0.11	630.08
9	81.7287	0.08	629.92
10	91.9447	0.05	629.77
11	102.1608	0.00	629.61

BEAM 5			
PT. NO.	DISTANCE TO POINT	DEFL.	SURFACE ELEVATION
1	0.0000	0.00	631.22
2	10.2161	0.05	631.07
3	20.4322	0.08	630.91
4	30.6482	0.11	630.76
5	40.8643	0.12	630.60
6	51.0804	0.13	630.45
7	61.2965	0.12	630.29
8	71.5126	0.11	630.14
9	81.7287	0.08	629.98
10	91.9447	0.05	629.83
11	102.1608	0.00	629.67

BEAM 6			
PT. NO.	DISTANCE TO POINT	DEFL.	SURFACE ELEVATION
1	0.0000	0.00	631.28
2	10.2161	0.05	631.13
3	20.4322	0.08	630.97
4	30.6482	0.11	630.81
5	40.8643	0.12	630.66
6	51.0804	0.13	630.50
7	61.2965	0.12	630.35
8	71.5126	0.11	630.19
9	81.7287	0.08	630.04
10	91.9447	0.05	629.88
11	102.1608	0.00	629.73

BEAM 7			
PT. NO.	DISTANCE TO POINT	DEFL.	SURFACE ELEVATION
1	0.0000	0.00	631.34
2	10.2161	0.05	631.18
3	20.4322	0.08	631.03
4	30.6482	0.11	630.87
5	40.8643	0.12	630.72
6	51.0804	0.13	630.56
7	61.2965	0.12	630.41
8	71.5126	0.11	630.25
9	81.7287	0.08	630.09
10	91.9447	0.05	629.94
11	102.1608	0.00	629.78

BEAM 8			
PT. NO.	DISTANCE TO POINT	DEFL.	SURFACE ELEVATION
1	0.0000	0.00	631.39
2	10.2161	0.05	631.24
3	20.4322	0.08	631.08
4	30.6482	0.11	630.93
5	40.8643	0.12	630.77
6	51.0804	0.13	630.62
7	61.2965	0.12	630.46
8	71.5126	0.11	630.31
9	81.7287	0.08	630.15
10	91.9447	0.05	630.00
11	102.1608	0.00	629.84

BEAM 9			
PT. NO.	DISTANCE TO POINT	DEFL.	SURFACE ELEVATION
1	0.0000	0.00	631.45
2	10.2161	0.05	631.29
3	20.4322	0.08	631.14
4	30.6482	0.11	630.98
5	40.8643	0.12	630.83
6	51.0804	0.13	630.67
7	61.2965	0.12	630.52
8	71.5126	0.11	630.36
9	81.7287	0.08	630.21
10	91.9447	0.05	630.05
11	102.1608	0.00	629.90

BEAM 10			
PT. NO.	DISTANCE TO POINT	DEFL.	SURFACE ELEVATION
1	0.0000	0.00	631.46
2	10.2161	0.05	631.31
3	20.4322	0.08	631.15
4	30.6482	0.11	630.99
5	40.8643	0.12	630.84
6	51.0804	0.13	630.68
7	61.2965	0.12	630.53
8	71.5126	0.11	630.37
9	81.7287	0.08	630.22
10	91.9447	0.05	630.06
11	102.1608	0.00	629.91

BEAM 11			
PT. NO.	DISTANCE TO POINT	DEFL.	SURFACE ELEVATION
1	0.0000	0.00	631.43
2	10.2161	0.05	631.27
3	20.4322	0.08	631.12
4	30.6482	0.11	630.96
5	40.8643	0.12	630.81
6	51.0804	0.13	630.65
7	61.2965	0.12	630.50
8	71.5126	0.11	630.34
9	81.7287	0.08	630.19
10	91.9447	0.05	630.03
11	102.1608	0.00	629.88

BEAM 12			
PT. NO.	DISTANCE TO POINT	DEFL.	SURFACE ELEVATION
1	0.0000	0.00	631.40
2	10.2161	0.05	631.24
3	20.4322	0.08	631.08
4	30.6482	0.11	630.93
5	40.8643	0.12	630.77
6	51.0804	0.13	630.62
7	61.2965	0.12	630.46
8	71.5126	0.11	630.31
9	81.7287	0.08	630.15
10	91.9447	0.05	630.00
11	102.1608	0.00	629.84

BEAM 13			
PT. NO.	DISTANCE TO POINT	DEFL.	SURFACE ELEVATION
1	0.0000	0.00	631.36
2	10.2161	0.05	631.21
3	20.4322	0.08	631.05
4	30.6482	0.11	630.90
5	40.8643	0.12	630.74
6	51.0804	0.13	630.59
7	61.2965	0.12	630.43
8	71.5126	0.11	630.28
9	81.7287	0.08	630.12
10	91.9447	0.05	629.96
11	102.1608	0.00	629.81


BEAM 14			
PT. NO.	DISTANCE TO POINT	DEFL.	SURFACE ELEVATION
1	0.0000	0.00	631.33
2	10.2161	0.05	631.17
3	20.4322	0.08	631.02
4	30.6482	0.11	630.86
5	40.8643	0.12	630.71
6	51.0804	0.13	630.55
7	61.2965	0.12	630.40
8	71.5126	0.11	630.24
9	81.7287	0.08	630.09
10	91.9447	0.05	629.93
11	102.1608	0.00	629.78

BEAM 15			
PT. NO.	DISTANCE TO POINT	DEFL.	SURFACE ELEVATION
1	0.0000	0.00	631.30
2	10.2161	0.05	631.14
3	20.4322	0.08	630.98
4	30.6482	0.11	630.83
5	40.8643	0.12	630.67
6	51.0804	0.13	630.52
7	61.2965	0.12	630.36
8	71.5126	0.11	630.21
9	81.7287	0.08	630.05
10	91.9447	0.05	629.90
11	102.1608	0.00	629.74

BEAM 16			
PT. NO.	DISTANCE TO POINT	DEFL.	SURFACE ELEVATION
1	0.0000	0.00	631.26
2	10.2161	0.05	631.11
3	20.4322	0.08	630.95
4	30.6482	0.11	630.80
5	40.8643	0.12	630.64
6	51.0804	0.13	630.49
7	61.2965	0.12	630.33
8	71.5126	0.11	630.18
9	81.7287	0.08	630.02
10	91.9447	0.05	629.86
11	102.1608	0.00	629.71

BEAM 17			
PT. NO.	DISTANCE TO POINT	DEFL.	SURFACE ELEVATION
1	0.0000	0.00	631.23
2	10.2161	0.05	631.07
3	20.4322	0.08	630.92
4	30.6482	0.11	630.76
5	40.8643	0.12	630.61
6	51.0804	0.13	630.45
7	61.2965	0.12	630.30
8	71.5126	0.11	630.14
9	81.7287	0.08	629.99
10	91.9447	0.05	629.83
11	102.1608	0.00	629.68

BEAM 18			
PT. NO.	DISTANCE TO POINT	DEFL.	SURFACE ELEVATION
1	0.0000	0.00	631.20
2	10.2161	0.05	631.04
3	20.4322	0.08	630.89
4	30.6482	0.11	630.73
5	40.8643	0.12	630.58
6	51.0804	0.13	630.42
7	61.2965	0.12	630.27
8	71.5126	0.11	630.11
9	81.7287	0.08	629.95
10	91.9447	0.05	629.80
11	102.1608	0.00	629.64

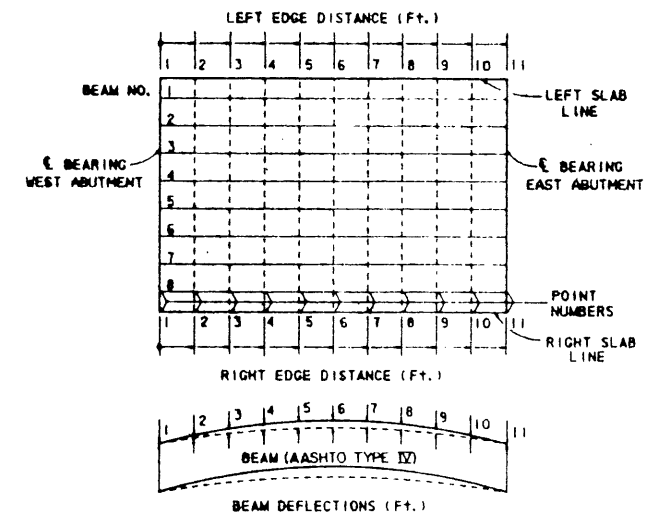

NOTE: FOR SLAB LAYOUT, SEE SHEETS S-28 AND S-29
FOR BEAM LAYOUT, SEE SHEETS S-28 AND S-29.

NO.	REVISION	BY	DATE
TEXAS TURNPIKE AUTHORITY			
DALLAS NORTH TOLLWAY			
BELT LINE ROAD UNDERPASS			
SLAB ELEVATIONS AND			
DEAD LOAD DEFLECTIONS			
Turner Collier & Braden Inc. <small>Consulting Engineers</small>			SECTION VI
DESIGNED	R.G.D.	DATE	5-83
CHECKED	T.J.R.	DATE	6-83
SCALE	NO SCALE		
CONTRACT NO. DNT-114 SHEET S-33 OF S-82			