


PLAN
Scale 1/4" = 1'-0"

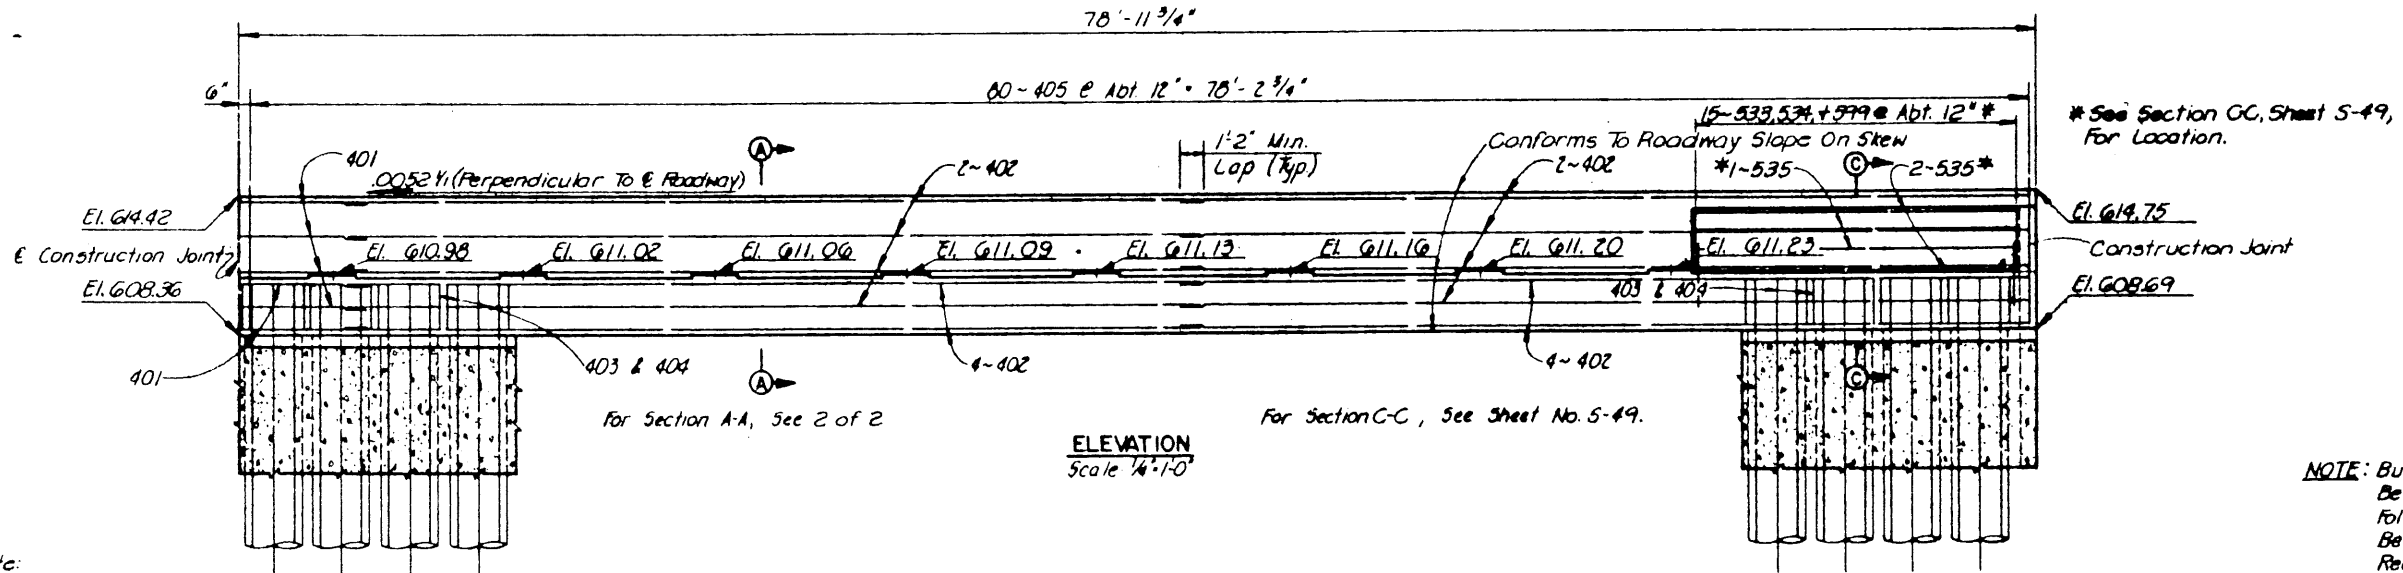


ELEVATION
Scale 1/4" = 1'-0"


NOTE: Built-up Portions Of Bearing Seat Shall Be Cast Integrally With Cap Or Constructed As Follows: The Area Under The Built-up Portion Is To Be Prepared In Accordance With Specification Requirements For Construction Joints. The Pedestal Shall Then Be Placed Using An Approved pre-packaged, non-shrink, impact resistant grout containing non-metallic fibers, similar to Set "Impact Resistant Grout". The grout shall be mixed and applied in accordance with the manufacturer's recommendations.

NOTES:
1. See East Abutment Details, 2 of 2 for Notes, Estimated Quantities and Details not shown.

Note:
The cost of reinforcing steel to be included in the price bid for drilled shafts. Bottom of drilled shaft elevation is approximate and should be varied as required to provide 8'-0" minimum penetration into unweathered rock measured from top of finished grade.

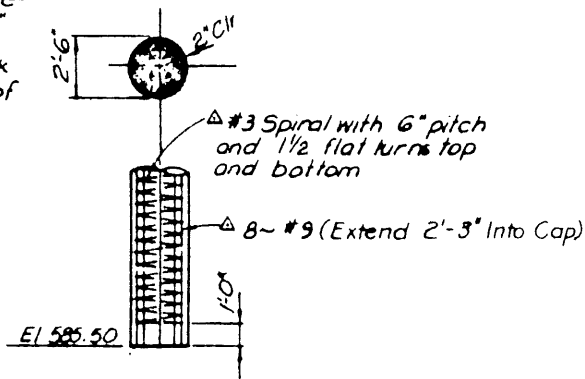

DRILLED SHAFTS (TYP)

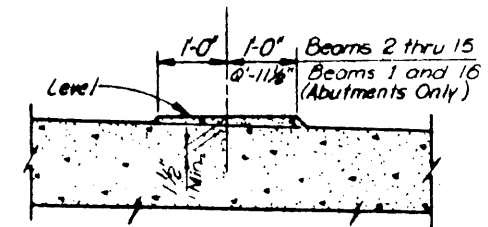

BEARING SEAT DETAIL
Scale 3/4" = 1'-0"

NO.	REVISION	BY	DATE
TEXAS TURNPIKE AUTHORITY DALLAS NORTH TOLLWAY ARAPAHO ROAD UNDERPASS EAST ABUTMENT DETAILS			
Turner Collie & Braden Inc. <small>(Consulting Engineers)</small>			SECTION VI
DESIGNED	DFD	DATE	5-83
CHECKED	JRA	DATE	6-83
DESIGNED	FRW	DATE	5-83
CHECKED	AS	DATE	NOTED
CONTRACT NO. DNT-114 SHEET S-40 OF S-82			