


MODEL	SIZE	BY PASS	LJ	WT	H1	WEIGHT LBS
DMT-ADS	6"	6"	11'0"	8'-0"	6'-0"	22,500

PLAN VIEW

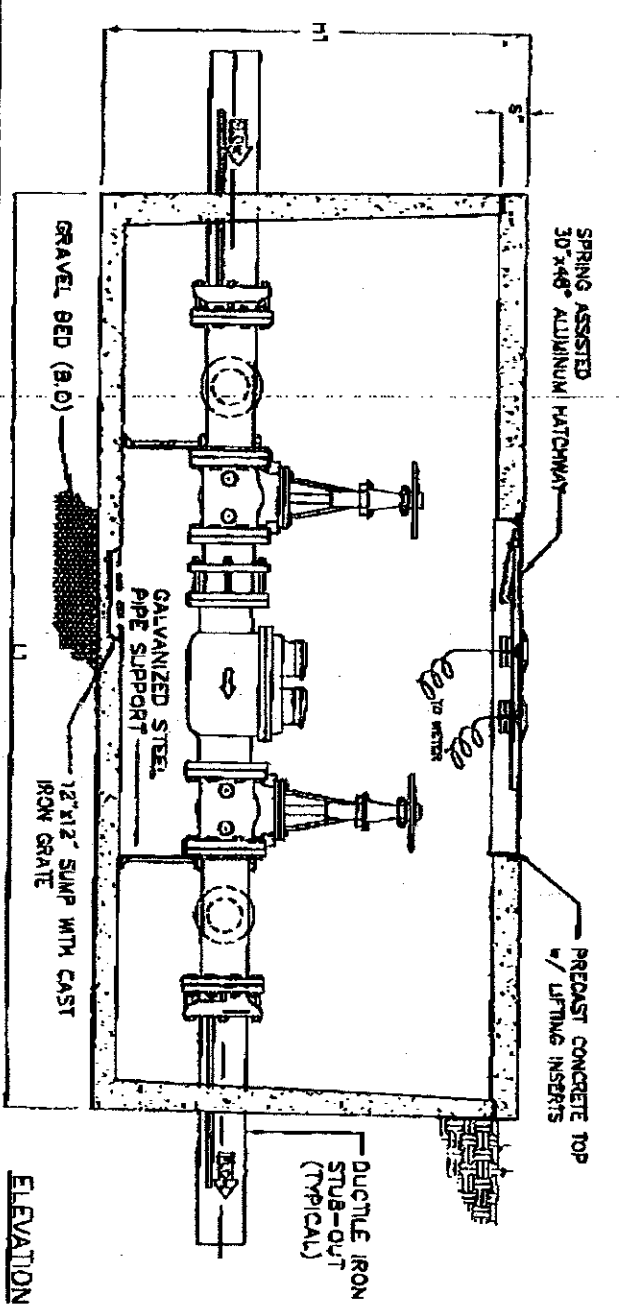

ELEVATION

Specifications

CONCRETE :

Class 1 concrete with design strength of 4500 PSI or 28 days. Unit is of monolithic construction at floor and first stage of wall with sectional floor to required depth.

REINFORCEMENT:

Grade 60 reinforced. Steel rebar conforming to ASTM A615 on required centers or equal.

HATCHWAY:

1/4" Aluminum diamond plate cover, with 1/4" extruded aluminum frame. Hatch to be furnished with 316 Stainless Steel snap lock & brass hinges.

Engineering Data

This meter assembly shall be factory assembled in vault & hydrostatically tested prior to delivery. Field acquisition & preparation shall be complete prior to delivery. Pipe, valves and fittings of the assembly shall be approved by one or more of the following associations:



NAMEPLATE INDICATING:
 MFG: PARK EQUIP. CO.
 (800) 256-8041
 MODEL: DMT-AD
 DATE MANUFACTURED

PROJECT : MARY KAY COOLING TOWER
 CUSTOMER : TRI-DAL
 ENGINEER :



TRIPLE A

6" TURBINE WATER METER ASSEMBLY FOR DOMESTIC SERVICE

SCALE NONE
 DATE 1/99

DWG. NO. DMT-AD

REV. A