


**BARRICADE NOTES:**

1. BARRICADES SHALL MEET THE REQUIREMENTS OF FAA ADVISORY CIRCULAR 150/5370-2E AND BE APPROVED BY THE ENGINEER
2. CONTRACTOR SHALL WEIGHT BARRICADE TO PREVENT DISPLACEMENT. METHOD TO BE APPROVED BY THE ENGINEER.
3. BARRICADES SHALL BE LOCATED AT THE 20' CENTER TO CENTER MAX SPACING
4. BARRICADES SHALL BE PLACED ALONG THE EDGE OF EXISTING PAVEMENT.

**LOW PROFILE AIRCRAFT BARRICADE (MOVEMENT AREAS)**  
SCALE: NONE

**HOMMEYER ENGINEERING, INC.**  
ENGINEERING • PLANNING  
SITE & LAND PLANNING  
P.O. BOX 294527 • LEWISVILLE, TEXAS 75029  
972-906-9985 PHONE • 972-906-9987 FAX  
WWW.HOMMEYERENGINEERING.COM

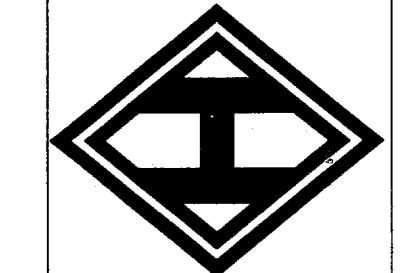

TURBINE AIR EXPANSION  
ADDISON AIRPORT, BLDG. A-5  
2.404 ACRES, ZONED - I-3  
4650 JIMMY DOOLITTLE DRIVE  
TOWN OF ADDISON  
DALLAS COUNTY, TEXAS

DETAILS

REVISIONS:  
01/14/2011  
1. REPLACED INLET  
DETAIL AS SHOWN.

DRAWN: HEI

DATE: 12/18/08

HEI #: 08-152

SHEET NO:

CG

