

KELLER SPRINGS CLUBHOUSE

ADDISON, TEXAS

INTERIOR DESIGN DRAWINGS

EMBREY PARTNERS, LTD

SAN ANTONIO, TX

KELLER SPRINGS CLUBHOUSE
ADDISON, TX

ISSUED FOR PRESENTATION
NOVEMBER 9, 2011

DRAWING LIST

DRAWING NUMBER	DRAWING TITLE
ID.0	DRAWING LIST, LEGEND & NOTES
ID.1	DETAIL LOCATION PLAN
ID.2	REFLECTED CEILING PLAN
ID.3.0	MISC. ELECTRICAL PLAN
ID.4.0	TRIMS & MISC. DETAILS
ID.4.1	MISC. DETAILS
ID.5	SECTIONS & ELEVATION
ID.FF	FLOOR FINISH PLAN
ID.FP	FURNITURE PLAN

INTERIOR DESIGN MISC. NOTES

- DUE TO THE VARIATIONS OF PRINTER SETTINGS FOR PDFs, THESE PLANS AS PRINTED MAY NOT BE TO SCALE. USE DIMENSIONS WHERE NOTED. IF SCALING IS NECESSARY, WE RECOMMEND YOU USE A DIMENSION ON THE PLAN AS THE BASIS TO CALCULATE THE DIFFERENCE BETWEEN IT AND WHAT YOUR SCALING TOOL READS.
 - CARE HAS BEEN TAKEN TO COMPLY WITH FEDERAL 2010 ACCESSIBILITY STANDARDS DURING DESIGN PHASE. HOWEVER, OWNER IS RESPONSIBLE FOR ENSURING APPROPRIATE T.A.S. COMPLIANCE & TIME OF INSPECTION.
- MARCH 15, 2012 IS THE COMPLIANCE DATE FOR USING THE 2010 REVIDED REQUIREMENTS FOR NEW CONSTRUCTION, ALTERATIONS, PROGRAM ACCESSIBILITY, AND BARRIER REMOVAL.
- ALTHOUGH UNDER CERTAIN CIRCUMSTANCES, THE REVISED REGULATIONS PERMIT THE USE OF THE 2010 STANDARDS BEFORE THE COMPLIANCE DATE OF MARCH 15, 2012. ENTITIES ARE NOT REQUIRED TO COMPLY WITH THE 2010 STANDARDS UNTIL MARCH 15, 2012.
3. FLAT SCREEN TVs ILLUSTRATED IN THESE PLANS WERE BASED ON MODELS SHOWN ON DETAIL "X" DWG. ID.TBD. TWO BASIC SIZES WERE DETERMINED OPTIMUM SIZES FOR OVERALL DESIGN COHESION.
- TVs SMALLER OR LARGER OR BY A DIFFERENT MANUFACTURER MAY NOT BALANCE WITH THE SURROUNDING INTERIOR DESIGN, AND USE OF LARGER MODELS MAY REQUIRE A DIFFERENT TV MOUNTING BRACKET.
- *SMALL TVs* ARE BASED ON: 52" SHARP AQUOS MODEL. *LARGE TVs* ARE BASED ON: 60" SHARP AQUOS MODEL. FINAL TV SELECTION & INSTALLATION PER OWNER.

INTERIOR DESIGN SYMBOL LEGEND

SYMBOL	DESCRIPTION
(X)	SPECIALTY LIGHT FIXTURE (REFER TO INTERIOR DESIGNER'S KEYED NOTES, THIS DWG.)
(XXX)	COMPONENT TAG---SEE DWG. ID.TBD UNDER "INTERIOR DESIGNER'S COMPONENTS"
(XX)	KEYED NOTE (REFER TO THIS DWG.)
(XX/10XX)	ELEVATION VIEW & DRAWING WHERE IT CAN BE FOUND
(XX)	ROOM TRIM & MOULDING COMBINATION
*	DIMENSION TAKEN DIRECTLY FROM ARCHITECTURAL DRAWINGS IFC 10-21-11
---	KELLER SPRINGS CROWN ASSY. USED AT PERIMETER OF 10'-8" & 10'-8 1/2" CEILINGS
▲	ADD'L. STUD FRAMING NOT SHOWN ON ARCHITECTURAL PLANS
▲	FINISHED DIMENSION---ALL OTHER DIMENSIONS ARE ROUGH DIMENSIONS U.N.
▲	FLOOR FINISH---REFER TO INTERIOR DESIGN SPECIFICATIONS ON DWG. ID.TBD
▲	WALL FINISH---REFER TO INTERIOR DESIGN SPECIFICATIONS ON DWG. ID.TBD
XX	DROPPED SOFFIT---BOTTOM OF FRAMING EL. 8'-0" A.F.F. UNLESS NOTED
(XX)	PRESENTATION NOTE TO CLIENT, STRUCTURAL ENGINEER, AND/OR MEP CONTRACTOR
○	8" DIA. RECESSED CAN PER LIGHTING CONTRACTOR AND SPECIFIED ON INTERIOR DESIGN MEP KEYED NOTES (THIS SHEET)
○	4" DIA. RECESSED CAN PURCHASED BY LIGHTING CONTRACTOR AND SPECIFIED ON INTERIOR DESIGN MEP KEYED NOTES (THIS SHEET)
○	36" DIA. SURFACE-MOUNT FIXTURE PER INTERIOR DESIGNER (SEE INTERIOR DESIGN DESIGN MEP KEYED NOTES (THIS SHEET))

PRESENTATION COMMENTS/QUESTIONS

ARCHITECTURAL	RESOLVED	
	YES	NO
1A	X	
2A	X	
3A	X	
4A	X	
5A	X	
6A	X	
7A	X	
8A	X	
9A	X	
10A	X	
11A	X	
12A	X	
13A	X	
14A	X	
15A	X	
16A	X	
17A	X	
18A	X	
19A	X	
20A	X	
21A	X	
22A	X	
23A	X	
24A	X	
25A	X	
26A	X	
27A	X	
28A	X	

STRUCTURAL

	RESOLVED	
	YES	NO
1S	X	
2S	X	

HVAC

	RESOLVED	
	YES	NO
1M	X	
2M	X	
3M	X	
4M	X	
5M	X	
6M	X	
7M	X	
8M	X	
9M	X	

PLUMBING

	RESOLVED	
	YES	NO
1P	X	

INTERIOR DESIGN MEP KEYED NOTES

- #### LIGHTING
- INTERIOR DESIGNER'S DRAWINGS LOCATE THE FOLLOWING SPECIALTY LIGHTING FIXTURES. FIXTURES ARE ORDERED BY INTERIOR DESIGNER & PURCHASED BY OWNER UNLESS NOTED. FURTHER INFORMATION ON THESE FIXTURES CAN BE FOUND UNDER "LIGHTING SPECIFICATIONS" ON DWG. ID.TBD.
 - (1) LOBBY CHANDELER, CUSTOM W/ 30 LED BULBS (TO BE VERIFIED) (ON DIMMER)
 - (2) LOBBY COVE STRIP LIGHTS---CORELIGHT (SIZES BY LIGHTING CONTRACTOR) ASYMMETRIC SPECULAR FLUORESCENT COVE, ITS LAMP EA. NO DIMMING---COOPER LIGHTING AMETRIX ITS COVE---OPTICS UP
 - (3) BILLIARDS FIXTURE---CUSTOM WITH 12 40W BULBS (ON DIMMER)
 - (4) 48" LG. PEERLESS LIGHTLINE RECESSED LINEAR WALL WASHERS GANGED IN GROUPS OF THREE, W/1-15 BULB EACH ORDERED BY LIGHTING CONTRACTOR (ON DIMMER)
 - (5) 52" DIA. FITNESS CEILING FANS WITH NO LIGHT KITS
 - (14) 4" DIA. RECESSED CAN (SOW) INCANDESCENT LOW-VOLTAGE DOWNLIGHT WITH PINHOLE APERTURE TRIM, SELECTED BY LIGHTING CONTRACTOR---INTERIOR DESIGNER TO SELECT TRIM COLOR.
 - (23) 6" DIA. RECESSED CAN (SOW) FLUORESCENT SELECTED BY LIGHTING CONTRACTOR. TRIM COLOR TO BE DETERMINED BY INTERIOR DESIGNER. (NO DIMMING) SEE LIGHTING PLAN FOR EMERGENCY KIT LOCATIONS
 - (15) 4" DIA. RECESSED CAN (SOW) INCANDESCENT LOW-VOLTAGE DOWNLIGHT WITH ADJUSTABLE SLOT APERTURE TRIM, SELECTED BY LIGHTING CONTRACTOR---INTERIOR DESIGNER TO SELECT TRIM COLOR.
 - (6) BUSINESS CENTER PENDANT FIXTURES, CUSTOM, W/1 ~ 60W INCANDESCENT BULB EA.
 - (1) 36" DIA. CORRIDOR SURFACE-MOUNT FIXTURE W/4 ~ 60W BULBS
 - (2) 89" LG. & (2) 24" LG. UP/DOWN LINEAR WALL MOUNTED WALL WASHER---OCL DUO SCONCE. LIGHTING CONTRACTOR TO DETERMINE NUMBER AND WATTAGE OF BULBS. INTERIOR DESIGNER TO SELECT FINISH. (ON DIMMER)
 - LIGHT FIXTURES THAT ARE DIMENSIONALLY LOCATED ARE CRITICAL TO FURNISHINGS PLACEMENT AND ANY CHANGES TO THESE LOCATIONS SHOULD BE COORDINATED WITH THE INTERIOR DESIGNER.
 - INTERIOR DESIGNER ASSUMES NO RESPONSIBILITY FOR LIGHTING DESIGN. ANY MODEL NUMBERS FOR FIXTURES CALLED OUT ON REFLECTED CEILING PLANS ARE SUGGESTIONS ONLY, AND SHOULD BE EVALUATED BY A LIGHTING PROFESSIONAL FOR APPROPRIATENESS.
 - ALL LIGHT FIXTURES ARE SPECIFIED BY OTHERS, EXCEPT THOSE NOTED AS BY INTERIOR DESIGNER IN LEGEND ABOVE.
 - CAREFULLY AVOID PLACING SAFETY LIGHTING, STROBES, OR HORNS IN AREAS ON ELEVATIONS DESIGNATED AS "SPACE FOR ART".
 - THE FOLLOWING LIGHT FIXTURES ARE TO BE ON DIMMER SWITCHES UNLESS OTHERWISE NOTED: ALL LIGHTING IN LEGEND ABOVE ALL WALL WASHERS
 - SWITCHPLATE SAMPLES ARE TO BE PROVIDED TO INTERIOR DESIGNER FOR COLOR SELECTIONS.
 - LOCATE SWITCHES AND/OR EMERGENCY LIGHTS OR ALARMS AS CLOSE TO CORNER AND/OR DOOR AS POSSIBLE.
 - Ø DIA. FLUORESCENT DOWNLIGHTS (BY LIGHTING CONTRACTOR) TO BE ON SEPARATE SWITCH NORMALLY OFF (USED FOR ROOM/EQUIPMENT MAINTENANCE SERVICES ONLY)
 - INTERIOR DESIGNER'S LIGHTING LAYOUT WAS BASED ON FURNISHING AND PARTITION LAYOUT PER PRESENTATION DESIGN, JOINTLY WITH MEP'S DWG E.B.1 ISSUED 10-24-11

- #### ELECTRICAL
- ELECTRICAL SYMBOLS IN ADDITION TO, RELOCATED FROM, OR IN LIEU OF, LOCATIONS SHOWN ON ELECTRICAL PLANS IFC 10-21-11. IN THE EVENT OF DISCREPANCY BETWEEN THIS DWG. & MEP CONSTRUCTION DWGS, BUILDER IS TO CONTACT INTERIOR DESIGNER.
 - MEP TO REVISE KITCHEN, RESTROOM AND COFFEE BAR AREAS POWER/RECEPTACLE LOCATIONS PER INTERIOR DESIGNER'S PRESENTATION DWGS. UPDATED MEP CAD FILES ARE REQUIRED PRIOR TO ISSUANCE OF ID IFC DRAWINGS.
 - RECEPTACLES THAT ARE DIMENSIONALLY LOCATED ARE CRITICAL TO FURNISHINGS PLACEMENT. ANY CHANGES TO THESE LOCATIONS SHOULD BE COORDINATED WITH INTERIOR DESIGNER.
 - HEIGHT OF RECEPTACLES TO BE PER LOCAL BUILDING CODES AND T.A.S. ACCESSIBILITY REQUIREMENTS UNLESS AS INDICATED IN NOTE 10 ABOVE.
 - RECEPTACLE PLATE SAMPLES TO BE PROVIDED TO INTERIOR DESIGNER FOR SELECTION.
 - ALL FLOOR RECEPTACLES ARE TO BE BRUSHED STAINLESS FINISH.

FRAMING

- FRAMERS ARE TO CAREFULLY CENTER STUDS AS SHOWN ON DWG. ID.1 AT FIVE RECESSED TV LOCATIONS TO FACILITATE INSTALLATION OF TRIM CABINETRY.

PLUMBING

- MEP IS TO ENSURE THAT PLUMBING STUD UPS ARE COORDINATED WITH LATEST RESTROOM, COFFEE BAR AND KITCHEN PLANS. UPDATED MEP CAD FILES ARE REQUIRED PRIOR TO ISSUANCE OF ID IFC DWGS.

HVAC

- REFLECTED CEILING PLAN SHOWS HVAC REGISTER LOCATIONS FROM HVAC PLAN IFC 10-21-11. SHADED AIR REGISTERS AND/OR EQUIPMENT TO BE RELOCATED TO AVOID INTERIOR DESIGNER'S CEILING TRIMS AND FIXTURES. AND/OR NEW ROOM CONFIGURATIONS. UPDATED MEP CAD FILES ARE REQUIRED PRIOR TO ISSUANCE OF ID IFC DWGS.

ROOM TRIM & MOULDING COMBINATION LEGEND

TAG NO.	ROOM	GRADE	DESCRIPTION
1	LOBBY, LEASING	STAIN, SPECIAL SURFACING	KELLER SPRINGS BASE THROUGHOUT (EXCEPT COLUMNS), KELLER SPRINGS CROWN ASSY. PERIMETER OF 10'-3" CEILING, VENEER PANELING COLUMNS & ACRYLIC BACKLIT PANEL. CUSTOM CABINETRY PER INTERIOR DESIGNER'S FABRICATION DWGS. RECESSED LIGHT COVE W/SPECIAL FINISH ON CEILING @ EL. 10'-8 1/2"
2	MANAGER, ASST. MGR.	PAINT	KELLER SPRINGS BASE
3	WORKROOM, STORAGE	PAINT	MFG. CABINETRY @ WORKROOM ONLY BY ARCHITECT. VINYL BASE TO MATCH FLOORING
4	MEN, WOMEN	PAINT	TILE BASE. TILE WALLS TO APPROX. 50" A.F.F. WALLCOVERING ABOVE. BRUSHED STAINLESS N-WALL AMENITY FIXTURES AS SPECIFIED BY INTERIOR DESIGNER
5	KITCHEN, GREAT ROOM, INTERIOR CAFE, DINING	STAIN	KELLER SPRINGS BASE THROUGHOUT, KELLER SPRINGS CROWN ASSY. PERIMETER OF 10'-8 1/2" CEILING, VENEER PANELING @ CEILING, DROPPED PAINTED GYP SOFFIT, CUSTOM CABINETRY PER INTERIOR DESIGNER'S FABRICATION DWGS. BUILT-IN BANQUETTE PURCHASED BY INTERIOR DESIGNER
6	BAR	STAIN	KELLER SPRINGS BASE, CUSTOM CASED OPENINGS AT ENTRANCES, KELLER SPRINGS WALL TRIM @ TV, GAMING ACCESSORY OPENINGS AND ABOVE DRINK RAIL AT REAR WALL
7	FITNESS	PAINT	KELLER SPRINGS BASE THROUGHOUT, KELLER SPRINGS CROWN ASSY. PERIMETER OF 10'-8 1/2" CEILING, THREE MIRRORED WALLS, CUSTOM TOWEL CABINET PER INTERIOR DESIGNER'S FABRICATION DWGS.
8	CLUB/ LEASING CORRIDOR	PAINT	KELLER SPRINGS BASE THROUGHOUT (EXCEPT COLUMNS), KELLER SPRINGS CROWN ASSY. PERIMETER OF 10'-8 1/2" CEILING OUTSIDE FITNESS
9	MAIL	PAINT	KELLER SPRINGS BASE THROUGHOUT. INTERIOR DESIGNER TO SELECT MAIL BOX FINISHES FROM ARCHITECT'S SELECTED VENDOR OPTIONS

WOOD SPECIES FOR CUSTOM CABINETRY AND TRIMS SHOULD RESEMBLE FURNITURE-GRADE MATERIALS, MAPLE OR ALDER ARE OPTIONS, BUT BUILDER SHOULD ASK THE CABINETMAKER FOR SUGGESTIONS THAT WILL PROVIDE AN EVEN, FINE-GRAINED APPEARANCE. SMALLER TRIMS MAY REQUIRE HARDWOOD SELECTION.

ELECTRICAL SYMBOL LEGEND

NOTE: ALL SYMBOLS MAY NOT APPEAR ON INTERIOR DESIGNER'S DRAWINGS. REFER TO ELECTRICAL ENGINEER'S PLANS FOR DETAILS, WIRING AND OTHER IMPORTANT INFORMATION REGARDING ELECTRICAL EQUIPMENT AND SYSTEMS. THIS LEGEND IS PROVIDED BY THE ELECTRICAL ENGINEER AS A COURTESY TO THE ARCHITECTURAL DESIGNER. PLEASE SEE THE ADJACENT INTERIOR DESIGNER'S KEYED MEP NOTES FOR FURTHER INFORMATION. DIMENSIONS ARE NOT TO SCALE.

SYMBOLS AND DESCRIPTIONS ARE NOT TO SCALE

\$ SINGLE POLE SINGLE THROW TOGGLE SWITCH (NOTE L-1)

\$/3\$ THREE-WAY TOGGLE SWITCH/FOUR-WAY TOGGLE SWITCH (NOTE L-1)

\$4\$ MOTOR RATED SWITCH

\$x\$ KEYED SWITCH

\$T\$ TIMER SWITCH

D DIMMER SWITCH (NOTE L-1)

D3 THREE-WAY DIMMER SWITCH (NOTE L-1)

⊕/⊕ DUPLEX / QUAD RECEPTACLE OUTLET (NOTE L-1)

(WP)=WEATHERPROOF, (GFI)=GROUND FAULT INTERRUPTER

⊕/⊕ G.F.C.I. DUPLEX RECEPTACLE OUTLET WALL/ABOVE COUNTER MOUNTED (NOTE L-1)

⊕ ISOLATED GROUND DUPLEX RECEPTACLE OUTLET

⊕ SPECIAL PURPOSE RECEPTACLE OUTLET, NEMA CONFIGURATION TO MATCH PLUG. (NOTE L-1)

⊕ SPLIT WIRED DUPLEX RECEPTACLE. ONE RECEPTACLE SHALL BE SWITCHED AS SHOWN ON PLANS (NOTE L-1)

⊕/⊕ DUPLEX RECEPTACLE OUTLET, CEILING MOUNTED/FLOOR MOUNTED

● MULTI-OUTLET ASSEMBLY WITH OUTLETS ON CENTERS AS INDICATED IN NOTES OR SPECIFICATIONS MOUNT 6" ABOVE COUNTER OR AS INDICATED

○ FIRE-RAT D POKE-THRU DEVICE

⊕/⊕/⊕ JUNCTION BOX, CEILING/WALL/FLOOR MOUNTED

X-1.5, X-1.25 ARROWHEAD INDICATES HOMERUN. X-1.3.5 ADJACENT TO HOMERUN. ARROWHEADS INDICATES HOMERUN TO PANEL X. CIRCUIT NUMBERS 1,3, AND 5.

3.5 INDICATES CIRCUIT CONTINUATION OF CIRCUITS 3 AND 5 OF PANEL X.

MARKS ACROSS RACEWAY SYMBOLS INDICATE THE NUMBER OF #12 CONDUCTORS (2 PHASE, 1 NEUTRAL) UNLESS OTHERWISE NOTED. NO MARKS INDICATES TWO #12 CONDUCTORS. EQUIPMENT GROUNDING CONDUCTORS ARE NOT INDICATED BY MARKS.

RACEWAY/CABLE CONCEALED IN WALL AND/OR ABOVE CEILING

RACEWAY CONCEALED BELOW GRADE OR IN-SLAB

RACEWAY/CABLE CONCEALED IN WALL AND/OR ABOVE CEILING - EMERGENCY CIRCUIT

RACEWAY INSTALLED EXPOSED

⊕ GROUNDING CONNECTION (SYSTEM AND/OR EQUIPMENT)

↕ CONDUIT TURNING UP/DOWN

⊕ CONDUIT STUB. TERMINATE IN INSULATED BUSHING OR CAP IF UNDERGROUND

○/○ FLUORESCENT LIGHTING FIXTURE, 2X4, 1X4, 2X2

○/○ FLUORESCENT LIGHTING FIXTURE, 2X4, 1X4, 2X2 - PROVIDING EMERGENCY ILLUMINATION

○/○ LIGHTING FIXTURE - OVERHEAD/WALL MOUNTED

○/○ EMERGENCY LIGHTING FIXTURE - OVERHEAD/WALL MOUNTED

○/○ FLUORESCENT STRIP FIXTURE - OVERHEAD/WALLMOUNTED

△ DIRECTIONAL OR WALL WASH LIGHTING FIXTURE

1x2, 2x2 LIGHT TRACK AND LIGHT TRACK FIXTURES

⊕ POLE MOUNTED LIGHT FIXTURE WITH ARM. SEE PLANS FOR NUMBER OF LUMINAIRES.

⊕ POST TOP OR BOLLARD LIGHT FIXTURE

⊕ CEILING/PENDANT MOUNTED PADDLE FAN

⊕ EXIT SIGN, CEILING/WALL MOUNTED. PROVIDE ARROWS AS INDICATED ON DRAWINGS

⊕ EMERGENCY LIGHTING FIXTURE

▭ PANELBOARD - WALL MOUNTED (RECESSED)

▭ PANELBOARD - WALL MOUNTED (SURFACE)

○ MOTOR

□/□/□ NONFUSIBLE DISCONNECT SWITCH, RATING/POLES/NEMA ENCLOSURE

□/□/□/□ FUSIBLE DISCONNECT SWITCH, RATING/POLES/NEMA ENCLOSURE/FUSE RATING

⊕/⊕ MAGNETIC MOTOR STARTER. NEMA SIZE RATING/ENCLOSURE (NEMA 1 IF NOT SHOWN)

⊕/⊕ COMBINATION MAGNETIC MOTOR STARTER AND DISCONNECT MEANS, NEMA SIZE RATING/ENCLOSURE (NEMA 1 IF NOT SHOWN)

⊕ CURRENT TRANSFORMER CABINET 48"

⊕ POWER METER AND SOCKET

⊕ FIRE ALARM MANUAL STATION 48"

⊕ FIRE ALARM HORN/SPEAKER WITH VISUAL DEVICE (NOTE L-3), NUMERAL INDICATES CANDELA RATING

⊕ FIRE ALARM HORN/SPEAKER (NOTE L-3)

⊕ FIRE ALARM VISUAL DEVICE (NOTE L-3), NUMERAL INDICATES CANDELA RATING

⊕ FIREMAN PHONE JACK

⊕ FIRE PHONE

⊕/⊕ SMOKE DETECTOR (CEILING/WALL MOUNTED 4" MIN. AND 12" MAX. FROM CEILING)

⊕ THERMAL DETECTOR, CEILING MOUNTED

⊕ CONNECTION TO FIRE PROTECTION SYSTEM FLOW SWITCH

⊕ CONNECTION TO FIRE PROTECTION SYSTEM TAMPER SWITCH

⊕ FIRE ALARM CONNECTION TO SMOKE/FIRE DOOR HOLD-OPEN DEVICE

⊕ DUCT MOUNTED SMOKE DETECTOR

⊕ REMOTE STATION FOR DUCT MOUNTED SMOKE DETECTOR

EXCPT/EXCPT FIRE ALARM CONTROL PANEL, SURFACE/RECESSED

EXCPT FIRE ALARM ANNUNCIATOR PANEL, RECESSED

⊕/⊕ TELEPHONE OUTLET, WALL MOUNTED/ABOVE COUNTER (NOTES L-1, L-2)/FLOOR MOUNTED 18"/43"

⊕/⊕ COMBINATION TELEPHONE/DATA OUTLET, WALL MOUNTED/ABOVE COUNTER (NOTE L-1, L-2)/FLOOR 18"/43"

⊕/⊕ DATA OUTLET, WALL MOUNTED/ABOVE COUNTER (NOTE L-1, L-2)/FLOOR MOUNTED 18"/43"

⊕/⊕ TELEVISION OUTLET WALL MOUNTED (NOTE L-1) CEILING MOUNTED/FLOOR MOUNTED 18"

LEGEND NOTES

L-1 MOUNTING HEIGHTS NOTED ARE TO THE CENTER OF DEVICE ABOVE FINISHED FLOOR, UNLESS NOTED OTHERWISE.


L-2 STUB 3/4" CONDUIT 6" ABOVE ACCESSIBLE CEILING AND TERMINATE WITH NYLON GROMMET.

L-3 FIRE ALARM VISUAL DEVICES SHALL BE WALL-MOUNTED 80" AFF OR 6" BELOW CEILING, WHICHEVER IS LOWER. AUDIBLE ONLY DEVICES SHALL BE WALL-MOUNTED AT NOT LESS THAN 90" AFF AND NOT LESS THAN 6" BELOW CEILING.

DRAWING LIST, LEGEND & NOTES

© 2011 M. FORD & ASSOCIATES, INC.

THIS DOCUMENT IS PUBLISHED AS AN INSTRUMENT OF SERVICE AND IS GIVEN IN CONFIDENCE. IT REMAINS THE PROPERTY OF M. FORD & ASSOCIATES, INC. NO PART OF THIS DOCUMENT, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, MAY BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS WITHOUT THE WRITTEN PERMISSION OF M. FORD & ASSOCIATES, INC. HOUSTON, TEXAS

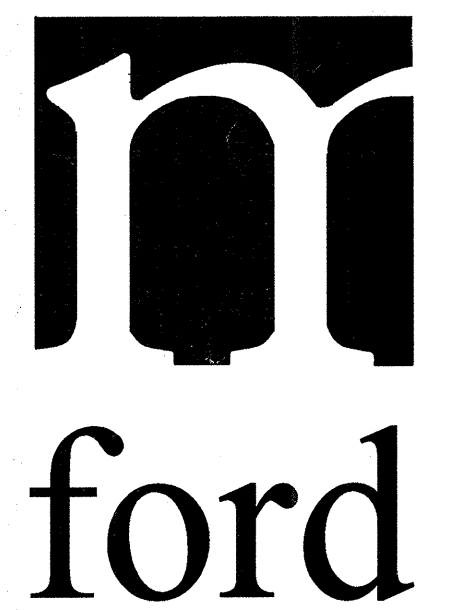

m. ford & associates
interior design
99 detersing street
suite 165
houston, tx 77007
phone 713-630-0800
fax 713-630-0814
mford@mfordassociates.com
www.mfordassociates.com

drawn by:

SHEET NO.

ID.0