


ITEM NO	DESCRIPTION	UNIT	SHEET SUMMARY																ITEM NO.	PROJ. TOTAL
			TOTALS																	
STREETSCAPE IMPROVEMENTS																				
501	BRICK PAVER/DROP SLAB/ARAPAHO/QUORUM	SF	3,950															501	3,950	
502	SANDBLAST CONC PVMT/ARAPAHO/QUORUM	SF	9,800															502	9,800	
503	CONCRETE CROSSWALKS SANDBLAST FINISH	SF	3,490															503	3,490	
504	BRICK PAVING/CONCRETE SIDEWALK/QUORUM	SF	4,000															504	4,000	
505	DOUBLE ROW BRICK BAND ON CONCRETE SLAB	SF	8,763															505	8,763	
506	SPEC. SIDEWALK/DIAG. SAWCUTS/SANDBLAST	SF	44,288															506	44,288	
507	1/4" FIBEROUS EXPANSION JOINT	LF	9,780															507	9,780	
508	1' CONCRETE EDGER ACROSS MEDIAN	LF	385															508	385	
509	BEGA LIGHT FIXTURE/POLE/FOUNDATION	EA	77															509	77	
510	3/4" SCH 40 PVC ELEC. CONDUIT	LF	3,500															510	3,500	
511	1" SCH 40 PVC ELEC. CONDUIT	LF	4,000															511	4,000	
512	2" SCH 40 PVC ELEC. CONDUIT	LF	1,200															512	1,200	
513	*6 AWG ELEC. WIRE WITH TERMINATIONS	LF	4,000															513	4,000	
514	*8 AWG ELEC. WIRE WITH TERMINATIONS	LF	10,000															514	10,000	
515	*10 AWG ELEC. WIRE WITH TERMINATIONS	LF	2,800															515	2,800	
516	CAST IRON ELECTRICAL JUNCTION BOX	EA	12															516	12	
517	60" TREE GRATE W/CONC. EDGE & BEAM	EA	113															517	113	
518	LIGHTED BOLLARD/CONDUIT/WIRING	EA	16															518	16	
519	4" PERFORATED PVC FRENCH DRAIN	LF	700															519	700	
520	NON-PERF. PVC CONNECTED TO INLETS	LF	4,500															520	4,500	
521	RED OAK TREE / 100 GAL. / 4" CAL.	EA	125															521	125	
522	FOSTER HOLLY / 12 FT. HEIGHT	EA	132															522	132	
523	ASIAN JASMINE / 4" POT / 9" O.C. IN QUORUM	SF	504															523	504	
524	BERMUDA SOD (TEX TURF 10)/6" TOPSOIL	SF	21,862															524	21,862	
525	ASIAN JASMINE / 4" POT / 9" O.C. IN MEDIAN	SF	2,275															525	2,275	
526	1 1/2" HERSEY WATER METER & VALVE	EA	2															526	2	
527	FEBCO 805-Y DOUBLE CHECK VALVE	EA	2															527	2	
528	RAINMASTER EVOLUTION DX-2 CONTROLLER	EA	1															528	1	
529	ELEC. SERVICE CONNECTION FOR IRRIGATION	LS	1															529	1	
530	RAIN BIRD 1402 BUBBLER FOR TREE WELL	EA	214															530	214	
531	TORO 57DZ-40 - 4" POP-UP FOR LAWNS	EA	318															531	318	
532	TORO 5702 - 12" POP-UP FOR PLANTING BED	EA	227															532	227	
533	4" SCH. 40 PVC SLEEVES FOR IRRIGATION	LF	1,160															533	1,160	
534	2 1/2" SCH. 40 PVC SLEEVES FOR IRRIGATION	LF	5,260															534	5,260	
535	WEATHERMATIC 1" ELEC. CONTROL VALVE	EA	3															535	3	
536	WEATHERMATIC 1 1/2" ELEC. CONTROL VALVE	EA	7															536	7	
537	WEATHERMATIC 2" ELEC. CONTROL VALVE	EA	8															537	8	
538	14 GA. ELECTRIC VALVE WIRING	LF	18,100															538	18,100	
539	2" SCH 40 BELLED PVC MAIN LINE	LF	350															539	350	
540	SPEARS 2" BALL VALVE	EA	18															540	18	
541	BUCKNER QUICK CONNECT VALVE	EA	4															541	4	
542	2 1/2" CLASS 200 PVC PIPE & FITTINGS	LF	80															542	80	
543	2" CLASS 200 PVC PIPE & FITTINGS	LF	1,120															543	1,120	
544	1 1/2" CLASS 200 PVC PIPE & FITTINGS	LF	1,360															544	1,360	
545	1 1/4" CLASS 200 PVC PIPE & FITTINGS	LF	3,220															545	3,220	
546	1" CLASS 200 PVC PIPE & FITTINGS	LF	4,000															546	4,000	
547	3/4" CLASS 200 PVC PIPE & FITTINGS	LF	3,400															547	3,400	
ALTERNATES																				
548	60" GRATE W/METAL FRAME-NEENAH(DEDUCT)	EA	109															548	109	
549	SW W/BASE & BASE TREE GRATE(DEDUCT)	EA	109															549	109	
550	3/4" SCH 40 PVC ELEC. CONDUIT & FITTINGS	LF	1,750															550	1,750	

RECORD DOCUMENTS 6/9/2000
 THESE RECORD DOCUMENTS HAVE BEEN PREPARED BASED ON INFORMATION PROVIDED BY OTHERS. THE CONSULTANT HAS NOT VERIFIED THE ACCURACY AND/OR COMPLETENESS OF THIS INFORMATION AND SHALL NOT BE RESPONSIBLE FOR ANY ERRORS OR OMISSIONS THAT MAY BE INCORPORATED AS A RESULT OF ERRONEOUS INFORMATION PROVIDED BY OTHERS.

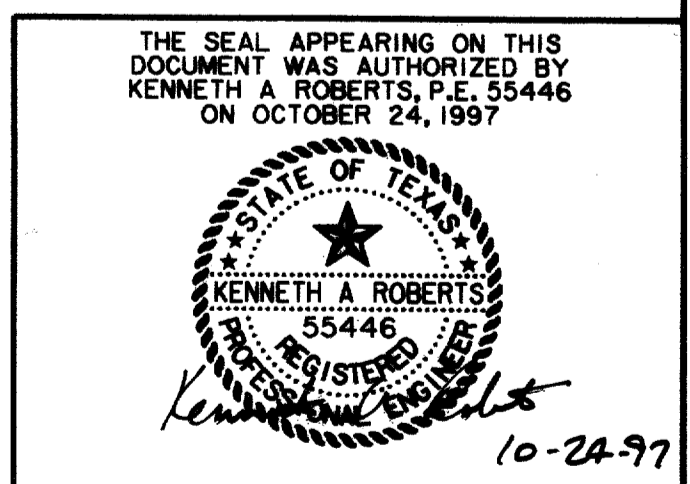

UPDATED 1/16/98

QUANTITY SUMMARY SHEET						
ARAPAHO ROAD						
ADDISON ROAD TO DALLAS NORTH TOLLWAY						
TOWN OF ADDISON, TEXAS						
Huitt-Zollars, Inc./Consulting Engineers Dallas, Fort Worth, Houston, Phoenix, Tustin						
DESIGN	DRAWN	APPR.	SCALE	DATE	PROJECT NO.	NO.
HZI	HZI	KAR	N.T.S.	OCT 97	1772-01	Q-4