


**SUMMARY CONSTRUCTION SEQUENCE**  
 (See Special Conditions 22 of Specifications for additional details)

1. Construct Detour A & B.
2. Construct 9'x5' box culvert and Detour C. This will also involve lowering of 16" water main and sanitary sewer relocation.
3. Construct storm sewer system on west side of centerline.
4. Excavate, lime and pave west 34-ft. section of roadway.
5. Switch the traffic to the new paving.
6. Construct the storm sewer system on the east side of centerline.
7. Excavate, lime and pave the east 34-ft. section of roadway.
8. Split the traffic and construct the median and left-turn lanes.
9. Complete remainder of the project as shown.
10. Drainage ditch improvement can commence at any time.

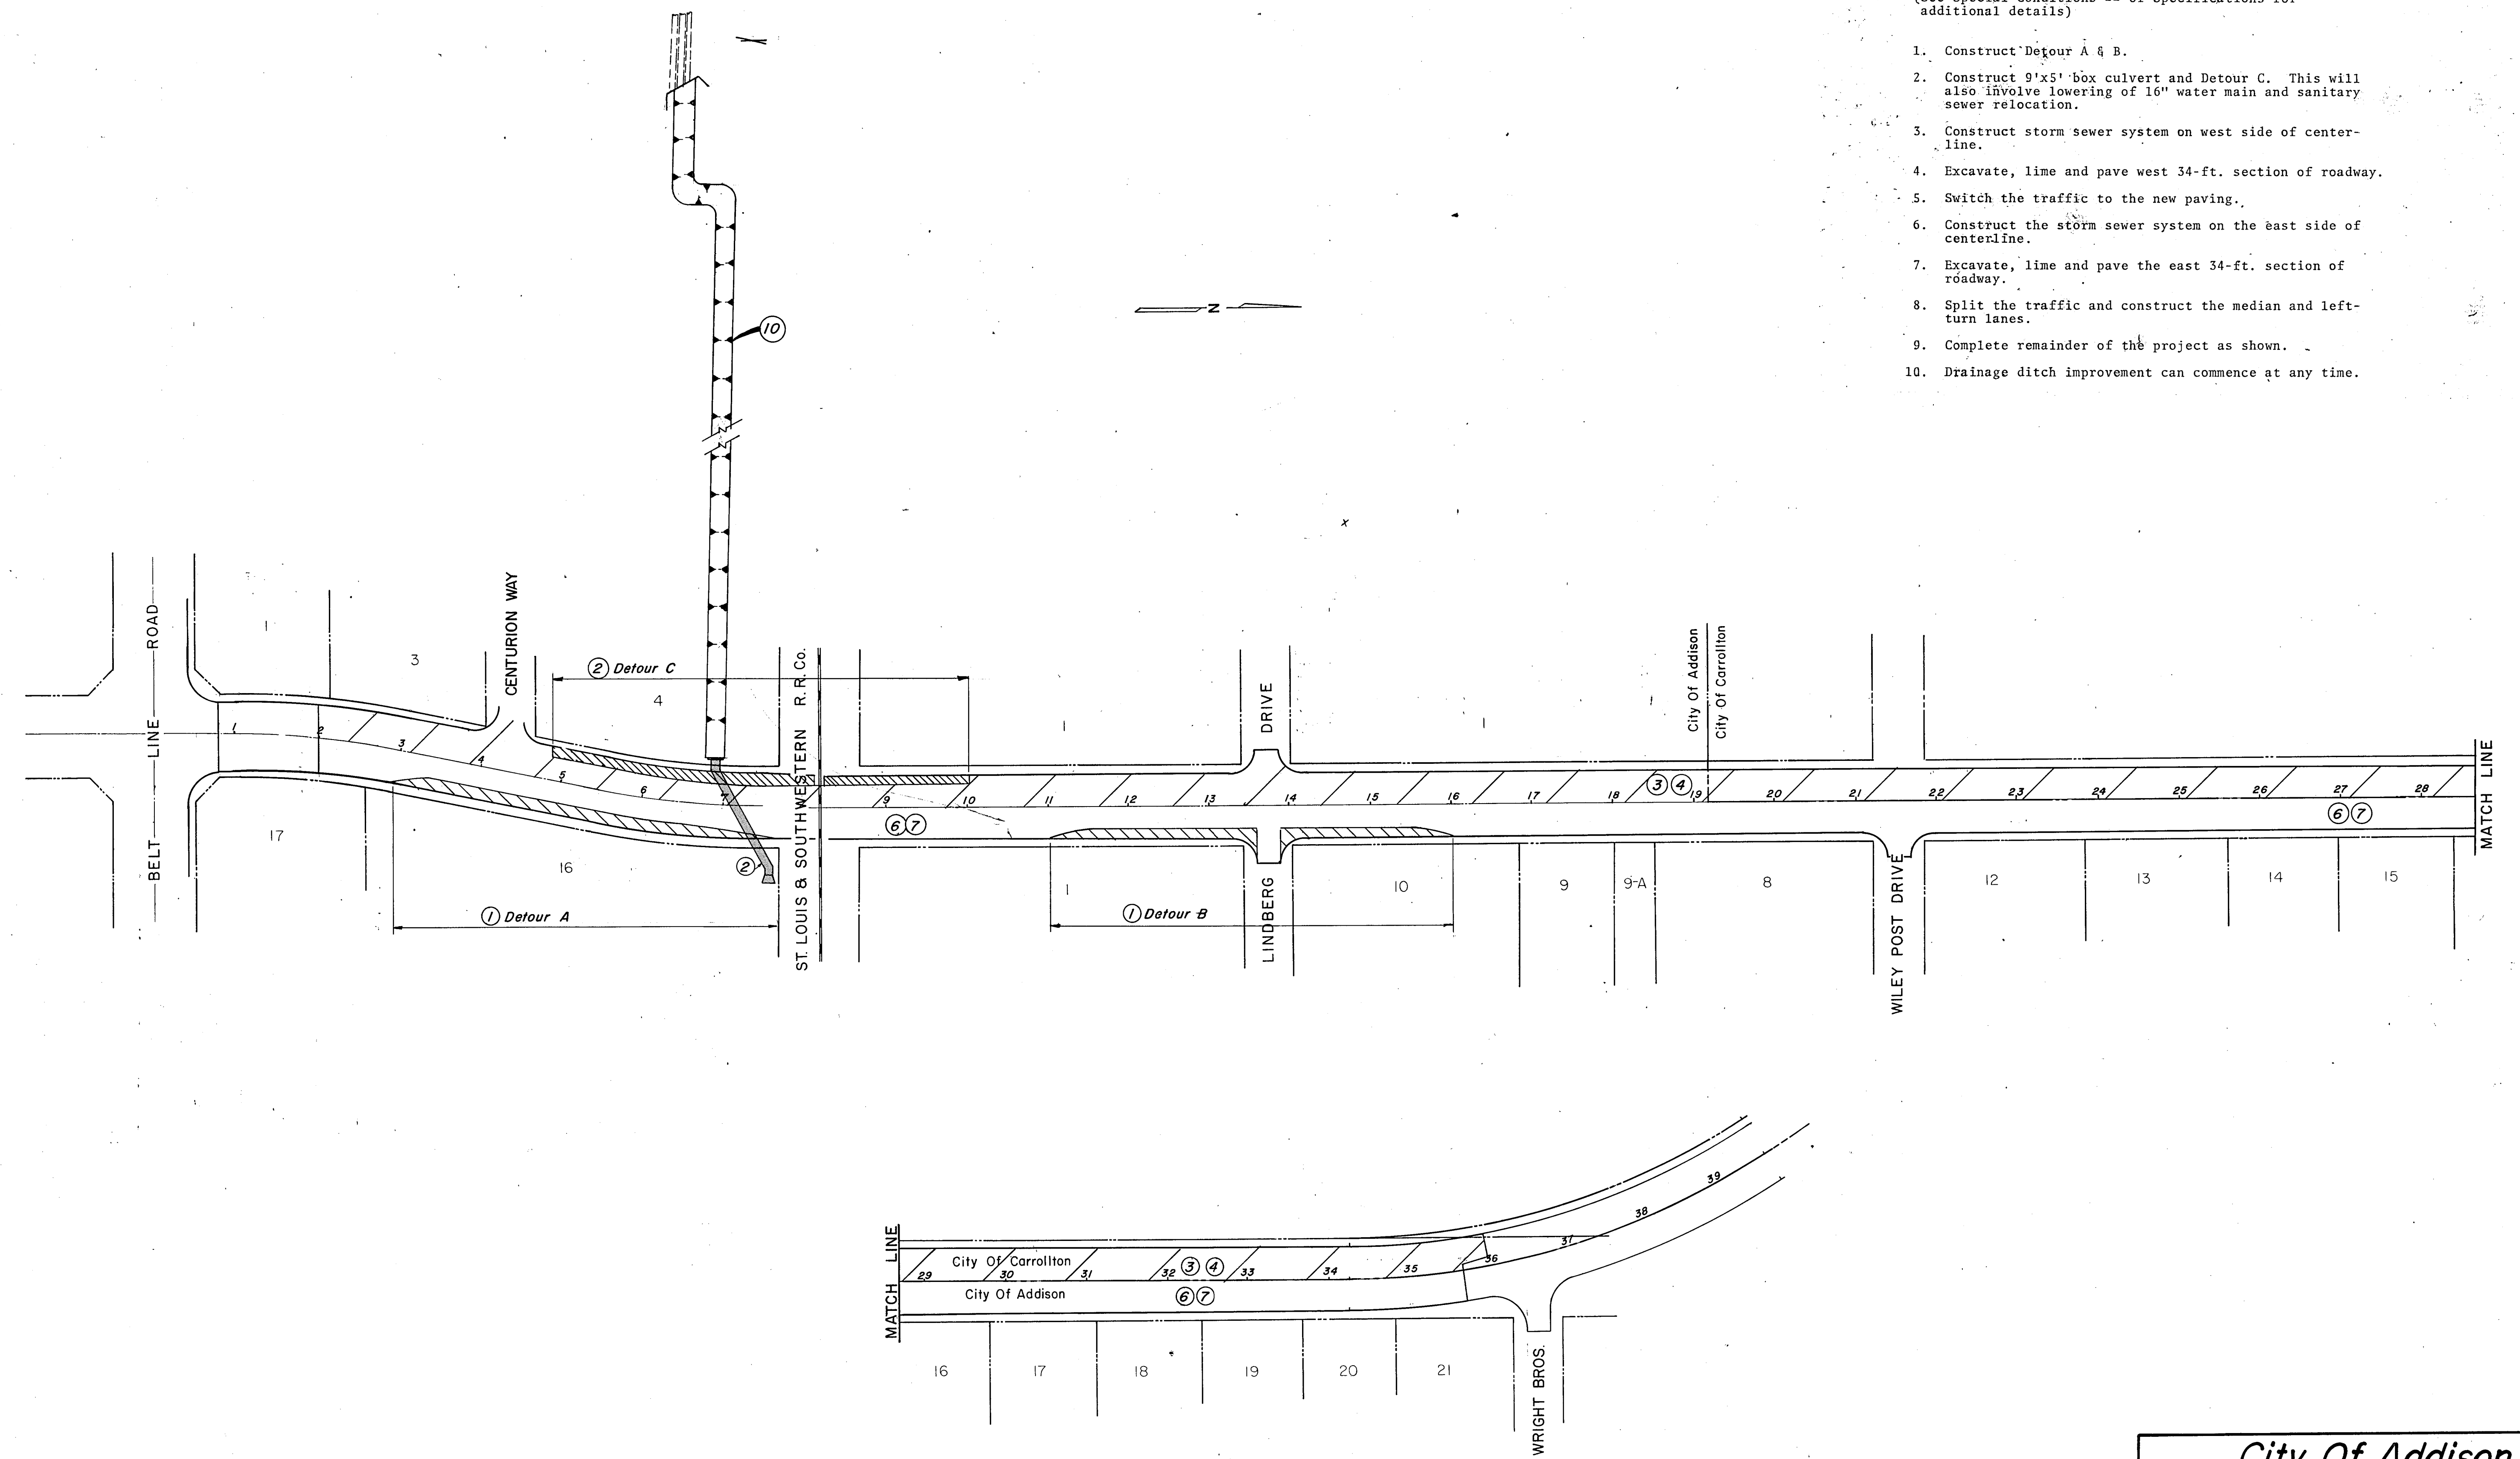

*City Of Addison*  
**MIDWAY ROAD  
 IMPROVEMENTS**

**CONSTRUCTION SEQUENCE**

DESIGNED H.B.J.	DRAWN R.G.B.	DATE MARCH, 1981	FILE
APPROVED H.W.G.	CHECKED A.G.F.	SCALE 1" = 100'	SHEET 3A OF