



QTY.	COMMON NAME	BOTANICAL NAME	SIZE	CONT.	CONDITION / REMARKS
TREES					
1	SHUMARD OAK	QUERCUS SHUMARDII	14-15 HT. 4" CAL.	100 GAL	SPECIMEN, 8 BRANCHING HEIGHT, FULL & SYMMETRICAL
33	SAVANNAH HOLLY	ILEX X ATTENUATA SAVANNAH	8-10 HT. 3" CAL.	45 GAL.	SPECIMEN, FULL & SYMMETRICAL
10	GRAPE MYRTLE	LAGERSTROMIA INDICA MUSKOGEE	6-8 HT.	30 GAL.	SPECIMEN, MULTI-STEM, 4-6 HEAVY CANES, TREE FORM, FULL & SYMMETRICAL
SHRUBS					
32	DWARF BURFORD HOLLY	ILEX CORNUTA BURFORDII PYGM.		5 GAL.	FULL & SYMMETRICAL
91	MARY NELL HOLLY	ILEX MARY NELL		5 GAL.	FULL & SYMMETRICAL
12	FRINGE FLOWER	LOREPETALUM CHINENSIS RUBRUM BURGUNDY		5 GAL.	FULL & SYMMETRICAL
GROUND COVER					
3,114	ASIAN JASMINE	TRACHELOSPERMUM ASIATICUM		1 GAL.	16" O.C.
TURF GRASS					
7,274	COMMON BERMUDA	CYNODON DACTYLON			SOD

PLANTING NOTES:

- 1) ALL SITE FEATURE LOCATIONS SHALL BE STAKED IN FIELD BY THE CONTRACTOR AND APPROVED BY THE LANDSCAPE ARCHITECT PRIOR TO INSTALLATION.
- 2) FINE GRADING SHALL BE PERFORMED IN ALL AREAS TO BE PLANTED. FINING GRADING SHALL INCLUDE THE REMOVAL OF DEBRIS, ROCKS, ETC. FROM THE SITE, AND INSURE POSITIVE DRAINAGE IN ALL AREAS TO BE PLANTED.
- 3) THE CONTRACTOR SHALL VERIFY ALL BUILDING SETBACK LINES, EASEMENT LINES, AND VISIBILITY LINES IN THE FIELD PRIOR TO CONSTRUCTION.
- 4) THE CONTRACTOR SHALL VERIFY LOCATIONS OF ALL UTILITIES IN THE FIELD PRIOR TO COMMENCEMENT OF WORK. CONTRACTOR IS RESPONSIBLE FOR ANY DAMAGE OCCURRING TO UTILITIES AS A RESULT OF CONSTRUCTION PROCESSES THROUGHOUT THE PROJECT DURATION.
- 5) WRITTEN DIMENSIONS SHALL GOVERN OVER SCALED DIMENSIONS.
- 6) PROVIDE POSITIVE DRAINAGE AWAY FROM ALL SITE FEATURES.

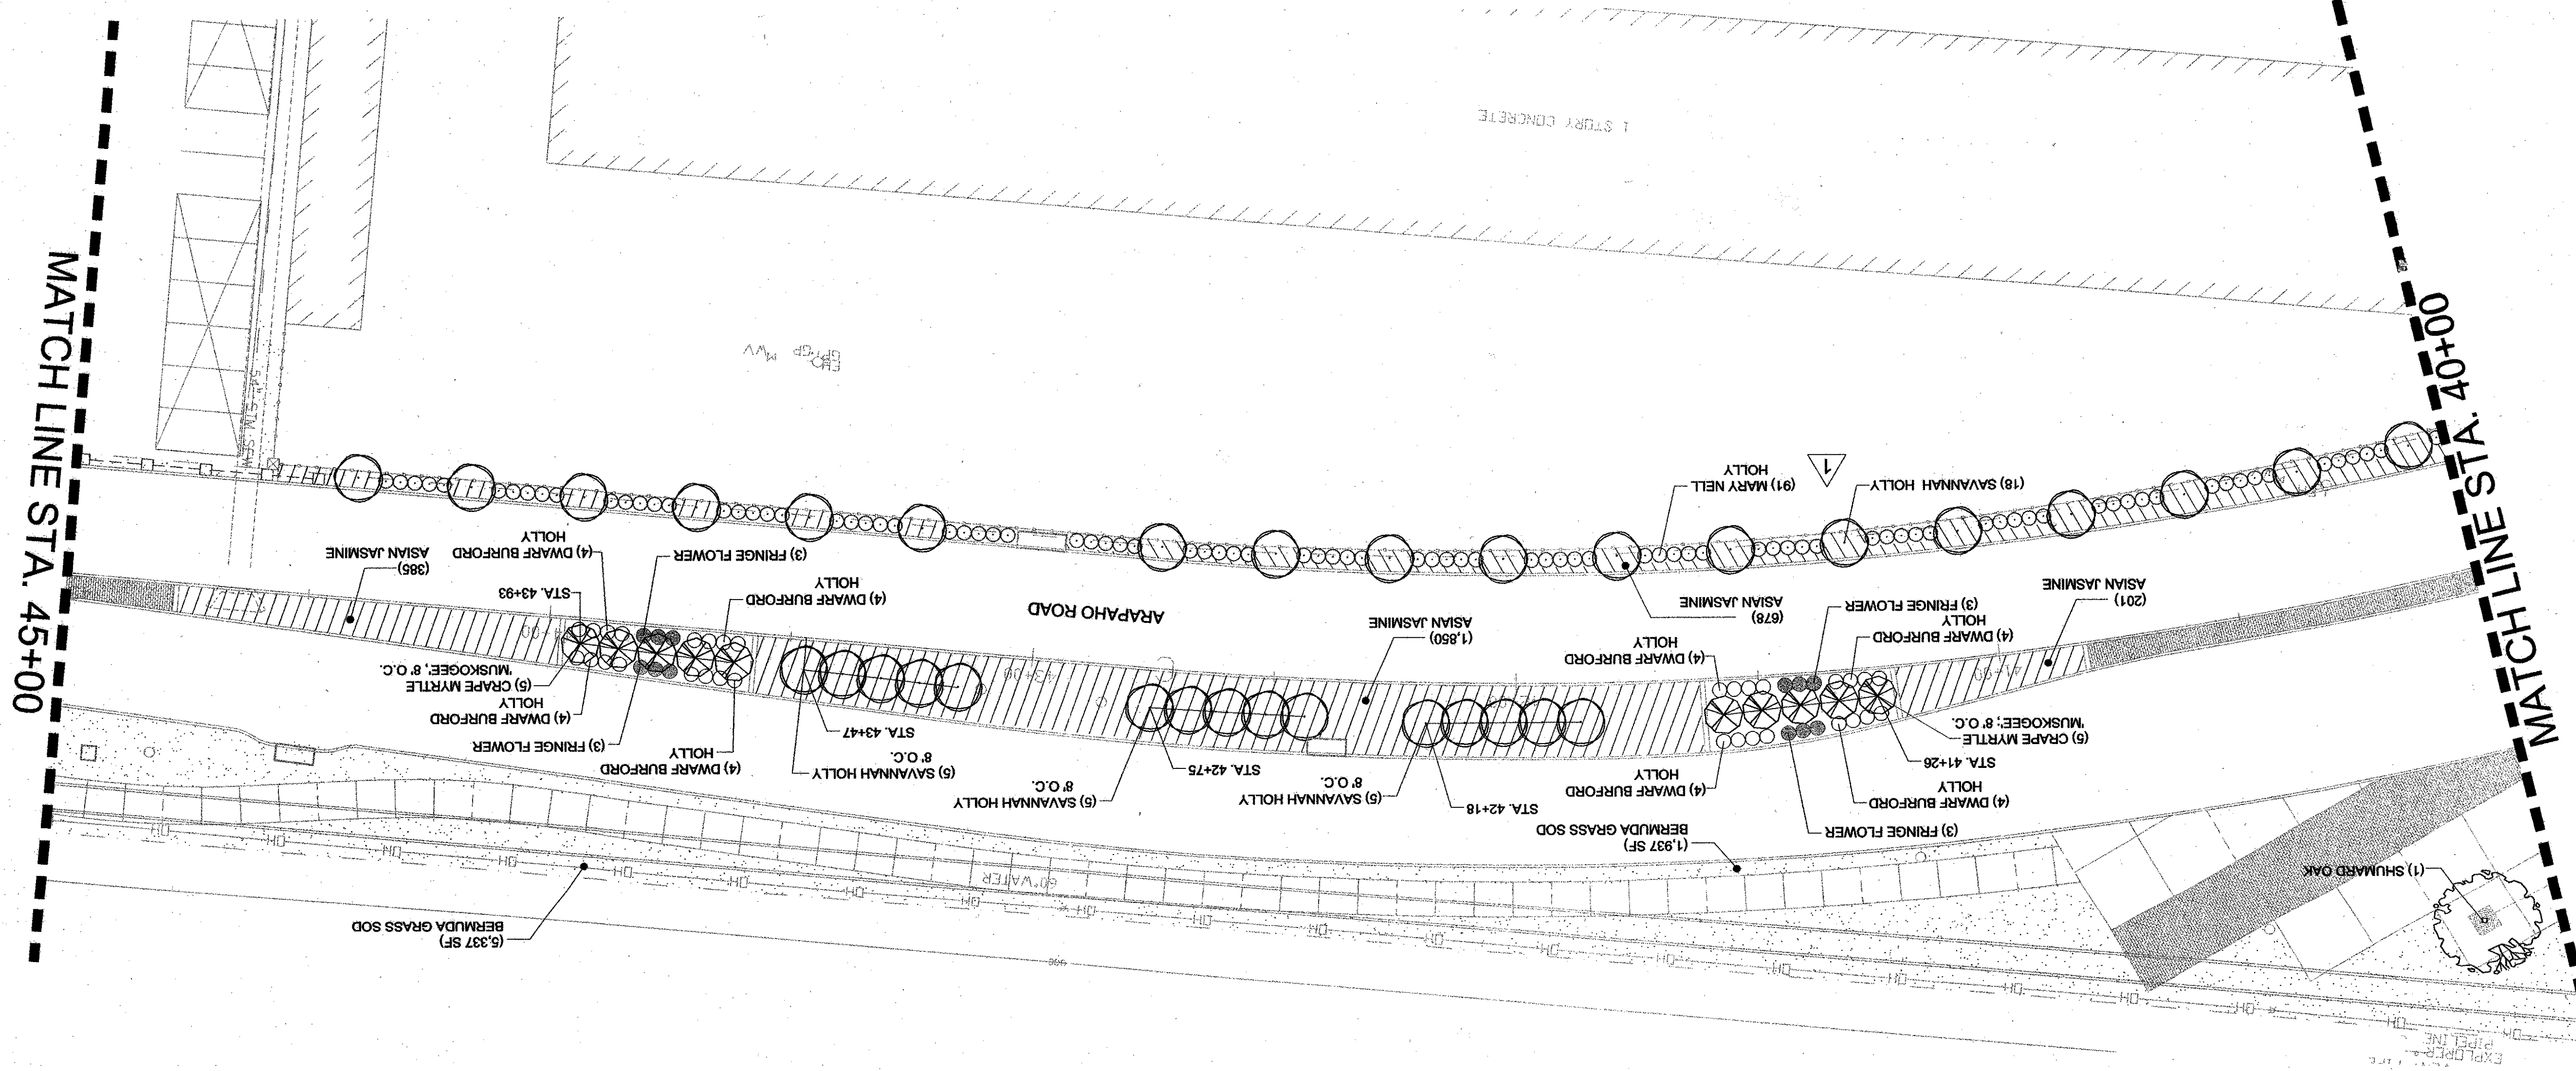

Symbol	Description
	BERMUDA GRASS SOD
	ASIAN JASMINE
	MARY NELL HOLLY
	FRINGE FLOWER
	DWARF BURFORD HOLLY
	GRAPE MYRTLE
	SAVANNAH HOLLY
	SHUMARD OAK

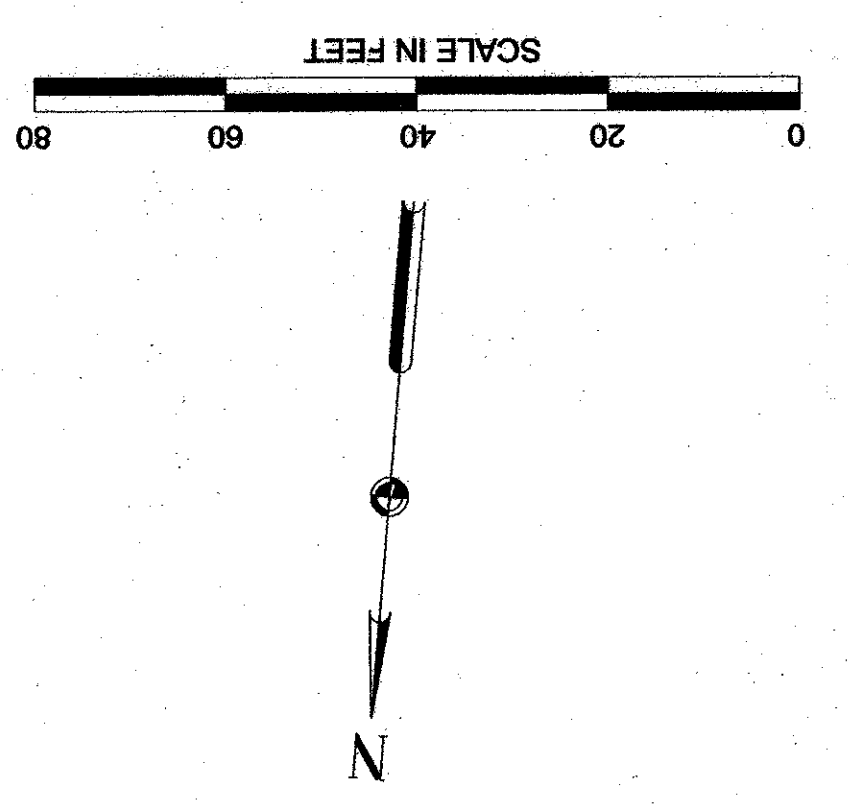

VOTED