


NOTE A
Contractor shall Saw and Remove 20X23 area of Asphalt in Addison Rd. as Required for placement of Junction Box and 2-24" RCP. Subgrade shall be reconstructed to maintain a compaction of 95% AASHTO-T99. 2-3" lifts of Type B Asphalt and 1-2" layer of Type D Asphalt Replacement. Remove Exist. 30" RCP From Exist. Y Inlet to outlet of Prop. Junction Box.

NOTE: CONTRACTOR shall Expose and Verify Elev. Prior to Adjust of Exist. Utilities.

B.M. "□" On Corner of Loading Dock at Howard Green Furniture - 15289 Addison Road (Elev. 629.854)
B.M. "□" On S.E. Corner of Concrete Walk at Front Entrance to 4805 Arapaho Rd. (Elev. 630.66)

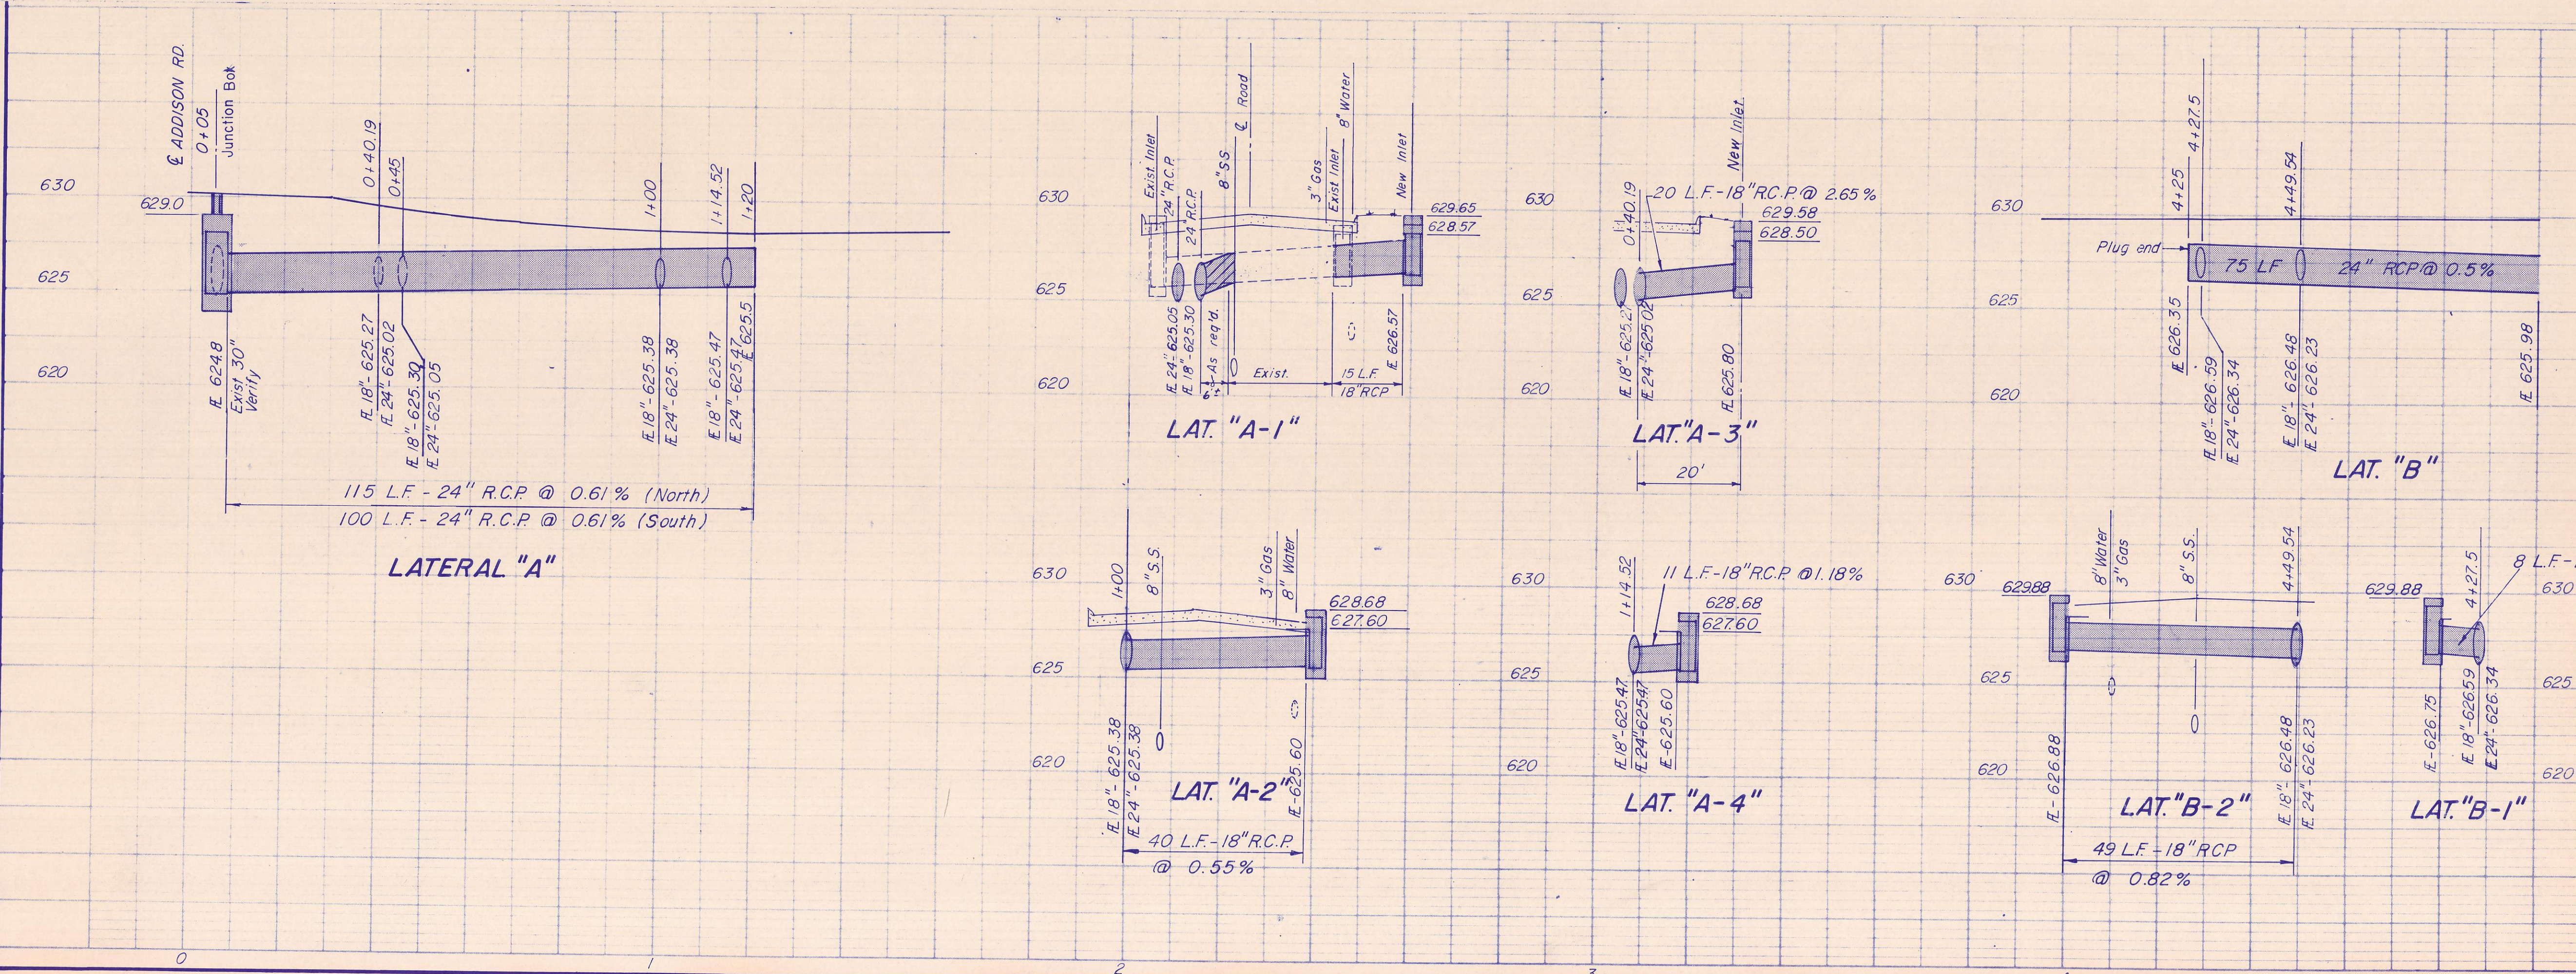

No.	Revision	By	Date
CITY OF ADDISON DALLAS COUNTY, TEXAS			
ARAPAHO RD. / QUORUM DR. IMPROVEMENTS			
ARAPAHO ROAD - DRAINAGE			
Sta. 0+00 to Sta. 5+00			
GINN, INC.			
Consulting Engineers Dallas, Texas			
Designed - GF	Drawn - GF	Date - DECEMBER, 1983	Job No. - J-177
Approved - HWG	Checked - HBJ	Scale - 1" = 20'	Sheet 13 of 22