


CONSTRUCTION PLANS
FOR
THE CONTAINER STORE
AN ADDITION TO
THE TOWN OF ADDISON, TEXAS

Developer
BELTWAY DEVELOPMENT
15280 ADDISON RD, SUITE 300
ADDISON, TX 75001
(972) 661-1011 (tel)
(972) 385-8039 (fax)
ATTN: Mark Sommer

Engineer
Brockette · Davis · Drake
4144 N. Central Expressway, Suite 1100
Dallas, Texas 75204
(214) 824-3647
(214) 824-7064 (fax)
ATTN: Jim Riley

Index Of Drawings

- C1 Cover Sheet
- C2 Final Plat
- C3 Final Plat
- C4 Site Plan
- C5 Paving Plan
- C6 Grading Plan
- C7 Water/Sanitary Sewer Plan

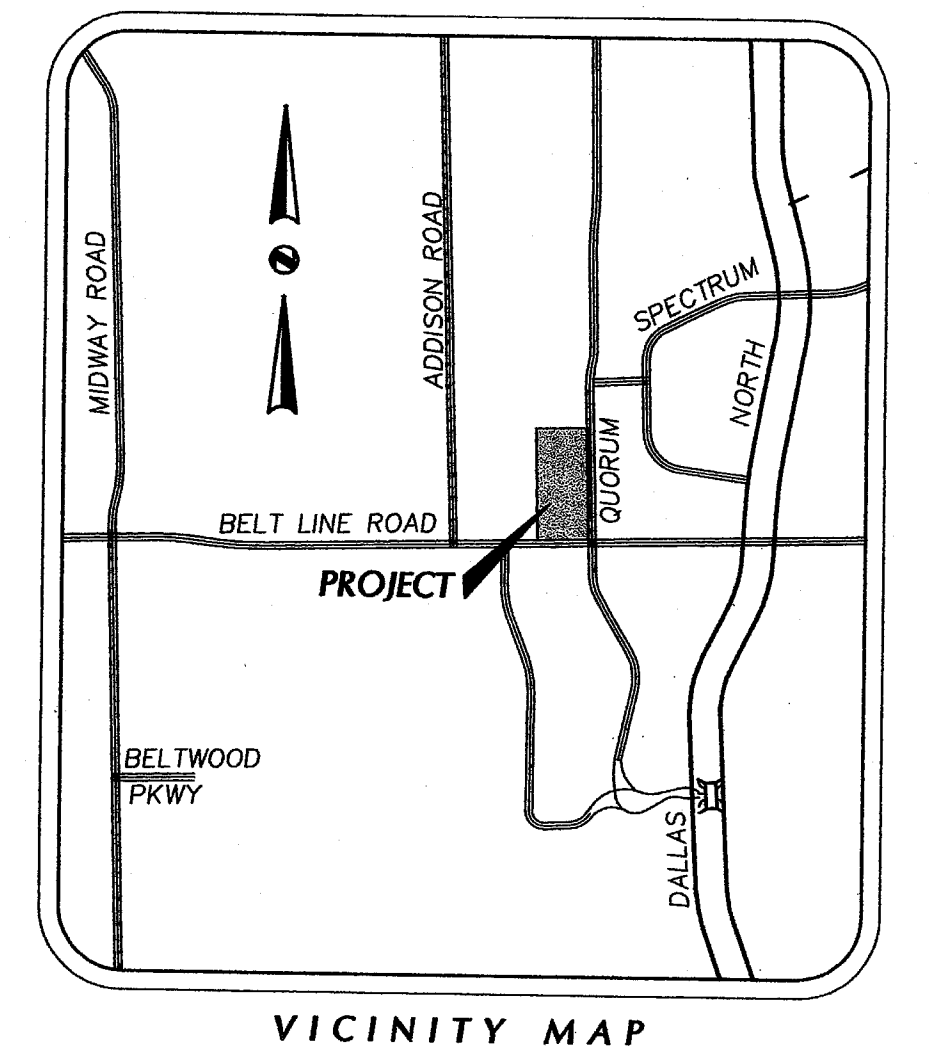

GENERAL NOTES

- A. Prior to final acceptance by the Town of Addison,
 1. A Texas Registered Professional Engineer shall certify that the project was constructed in accordance with the plans and specifications approved by the Town of Addison.
 2. The Owner shall provide the responsible set of as-built (sealed and certified by a Texas Registered Engineer) and two blue line sets.
 3. A five foot (5') sidewalk shall be installed along the public streets. See attached detail.
 4. A one year 10% maintenance bond is required for the public infrastructure.
 5. Contractor shall demonstrate that the water and sanitary sewer systems meet the property pressure, bacteria, and mandrel tests. In addition, the Owner shall provide a HDS format video tape of the sanitary sewer.
- B. Prior to starting construction, the Contractor shall contact the utility companies to locate existing facilities. These include but may not be limited to the following:
 1. Town of Addison
 2. Dacor Electric & TXU Gas
 3. Southwestern Bell SBC
 4. Comcast
 5. Fiber Optic Companies
- C. Prior to beginning construction, the Owner or his authorized representative shall convene a preconstruction conference among the Town of Addison, Consulting Engineers, Contractor(s), Utility companies and any other affected parties. Notify Dave Wick (972) 450-2871 at least 48 hours prior to beginning of construction.
- D. Any existing pavement, curbs, and/or sidewalks damaged or removed will be repaired by the Contractor at their expense, and in accordance with Town of Addison etc. specifications.
- E. Lot pins shall be installed after construction and prior to final acceptance. Concrete monuments shall be placed as shown on the first plat and iron pins shall be placed at block corners, curve points and angle points in public right-of-way. Concrete monuments shall be six inches (6") in diameter and twenty-four inches (24") long. Iron rod one-half inch (1/2") in diameter embedded at least three inches (3") in the monument at the exact intersection point of the monument. The monuments shall be set at such an elevation that after construction, the top of the monument will be not less than twelve inches (12") below the ground surface.
- F. The Contractor shall stamp a two inch (2") "S" and a two inch (2") "W" in the curb at the location of the sewer service and water service lines, respectively.
- G. Temporary or permanent street barricades and signage shall remain at all points of ingress and egress to prevent public use until such street received final acceptance.
- H. Contractor shall obtain a right-of-way permit by the Town of Addison for working within the public right-of-way.
- I. During construction, the Owner shall provide a qualified geotechnical lab at owner's expense to perform materials testing during the construction at the request of the Town of Addison.
- J. The Contractor shall submit material sheets to the Town of Addison for approval prior to incorporating materials into the job.
- K. The utility contractor shall submit to the Town of Addison for approval a trench safety plan signed by a Registered Professional Engineer for the installation of utilities greater than five feet (5') in depth.
- L. All existing and proposed improvements (valves, manholes, fire hydrants, water meters, etc.) shall be adjusted to finished grade by the Contractor.

James A. Riley
 02.24.04

THE CONTAINER STORE ADDISON TX