

NORTH SCALE: 1" = 20'-0"

NOTES: PEDESTRIAN CROSSING

BASE BID SHALL INCLUDE THE FOLLOWING:

- 1. POWER WASH AND CLEAN EXISTING CONCRETE ACCORDING TO MANUFACTURER'S RECOMMENDATIONS
- SAW CUT CONCRETE AS NOTED ON PLAN DETAIL THIS SEET
 APPLY CHEMICAL STAIN AS DESCRIBED ON PLAN DETAIL THIS SHEET

ADD ALTERNATE:

- 1. SAW CUT, REMOVE AND DISPOSE OF EXISTING CONCRETE PER CIVIL
- ENGINEER'S TRAFFIC SAFETY PLAN AND SPECIFICATIONS

 2. PLACE AND FINISH INTEGRAL COLORED CONCRETE AS DESCRIBED ON PLAN THIS SHEET AND PER TOWN OF ADDISON STANDARD CONSTRUCTION DETAILS
- 3. APPLY COLOR WAX CURING COMPOUND PER MANUFACTURER'S SPECIFICATIONS

NOTE: SAW CUT ALL JOINTS SHOWN TO DEMARCATE CROSSING, NO OVERLAPS ARE ACCEPTABLE. DO NOT CUT CURBS. SAW CUTS ½" TO ½" MAX. ALL JOINTS TO BE CHALKED IN THE FIELD FOR APPROVAL BY LANDSCAPE ARCHITECT AND TOWN OF ADDISON PRIOR TO CUTTING. CONTACT MICHAEL KASHUBA, TOWN OF ADDISON LANDSCAPE ARCHITECT: 972.450.2831.

CONTRACTOR IS RESPONSIBLE FOR ALL AREAS DISTURBED DURING CONSTRUCTION, WHETHER DEPICTED IN PLANS OR NOT.

CONTRACTOR IS RESPONSIBLE FOR LOCATING AND PROTECTING ALL UTILITIES IN WORK AREA. SEE GENERAL NOTE #2.

NOTE:
REFER TO CIVIL PLANS FOR ALL CROSSWALKS AND ACCESS
RAMPS. LANDSCAPE PLANS DESCRIBE FINISHES ONLY

NOTE: FIELD VERIFY ALL LOCATIONS

CONCRETE PRODUCTS

C-1 STANDARD CONCRETE PAVING

MANUFACTURER: LOCAL PRODUCT: STANDARD GRAY CONCRETE; 3000 PSI; LIGHT BROOM FINISH BASE BID:

C-2 STAINED CONCRETE PAVING

SUPPLIER: SCOFIELD LITHOCHROME CHEMSTAIN. COLOR TO BE SELECTED AFTER MOCK-UP SAMPLES. COLOR SUGGESTED: CS-14 "DARK WALNUT." APPLY PER MANUFACTURER'S SPECIFICATIONS. LOCAL SCOFIELD REP. JIM ORELLA 972.839.3730.

3 STAINED ACCENT BAND CONCRETE PAVING

SUPPLIER: SCOFIELD LITHOCHROME CHEMSTAIN. COLOR TO BE SELECTED AFTER MOCK-UP SAMPLES. COLOR SUGGESTED: CS-15 "ANTIQUE AMBER." APPLY PER MANUFACTURER'S SPECIFICATIONS. LOCAL SCOFIELD REP. JIM ORELLA 972.839.3730.

ADD ALTERNATE:

C-4 INTEGRAL COLORED CONCRETE PAVING

MANUFACTURER: LOCAL PRODUCT: INTEGRAL COLORED 8" THICK CONCRETE; SCOFIELD INTEGRAL COLOR TO BE SELECTED AFTER MOCK-UP SAMPLES. FOLLOWED BY SCOFILED LITHOCHROME COLORWAX. COLOR SUGGESTED: SG677-4 "ROAST CHESTNUT." APPLY PER MANUFACTURER'S SPECIFICATIONS. LOCAL SCOFIELD REP. JIM ORELLA 972.839.3730. REFERENCE TOWN OF ADDISON STANDARD DETAILS FOR CONSTRUCTION.

C-5 INTEGRAL COLORED ACCENT BAND CONCRETE PAVING

MANUFACTURER: LOCAL
PRODUCT: INTEGRAL COLOR 8" THICK CONCRETE; SCOFIELD INTEGRAL
COLOR TO BE SELECTED AFTER MOCK-UP SAMPLES. FOLLOWED BY
SCOFILED LITHOCHROME COLORWAX. COLOR SUGGESTED: SG447-2
"SCHOONER BEIGE." APPLY PER MANUFACTURER'S SPECIFICATIONS.
LOCAL SCOFIELD REP. JIM ORELLA 972.839.3730.
REFERENCE TOWN OF ADDISON STANDARD DETAILS FOR CONSTRUCTION.

REFERENCE TOWN OF ADDISON STANDARD DETAILS FOR CONSTRUCTION. BASE BID ITEMS: BASE BID ITEMS: STAINED CONCRETE PAYING (I) STAINED CONCRETE COLOR, SAW CUT CROSS HATCH PAVING (I) COLOR, SAW 2'-6" SQUARES, PATTERN TO BE CUT CROSS HATCH 2'-6' ORIENTED 45° TO ROAD SQUARES, PATTERN TO BE ORIENTED 45 ° TO ROAD APROX. 359 SF. APROX. 680 SF. 08 ALTERNATE BID ITEMS: ALTERNATE BID ITEMS: EXISTING UTILITIES TO -N BE RELOCATED (TYP.)-INTEGRAL COLOR CONCRETE INTEGRAL COLOR CONCRETE-C-4 A/L4.06 REF. CIVIL PLANS PAVING, SAW CUT CROSS PAVING, SAW CUT CROSS HATCH 2'-6" SQUARES, HATCH 2'-6" SQUARES, PATTERN TO BE ORIENTED 45° PATTERN TO BE ORIENTED PROTECT EXISTING TREE SHE TO ROAD APROX. 359 SF. 45° TO ROAD ROOTS PRUNE TREES AND SAW APROX. 680 SF. CUT ROOT MASS 12" FROM PROPOSED ACCESSIBLE C-4 A/L4.06 A/L1.02 EDGE OF NEW TRAIL. RAMP (TYP.)- REF. CIVIL PLANS SE 14"LIVE OAK 21"LIVE OAK 2-10"LIVE OAKS Q 2-10"LIVE OAKS POST HEDGEROW / DRIVE POST PROPOSED CONCRETE TRAIL (TYP.) BELTWAY DRIVE PROPOSED CURB- REF - EXISTING UNDERGROUND UTILITIES (TYP.) : CIVIL PLANS (TYP.) -8SS-L/5.08 PROPOSED RAIN GARDEN-PROPOSED 6" PVC REF. LANDSCAPE PLAN (TYP.) (SOLID) DRAIN LINE LIMIT OF WORK LINE (TYP.) - LANDSCAPE AND CIVIL PHASE 3 FOR RAIN GARDEN (ALTERNATE BID ITEM)

Layout Plan


Scale: 1" = 20'-0"

1807 Ross Ave, Suite 333 Dallas, Texas 75

Dallas, Texas 75201 214.871.0568 tel 214.871.1507 fax mesadesigngroup.com



VICINITY MAP

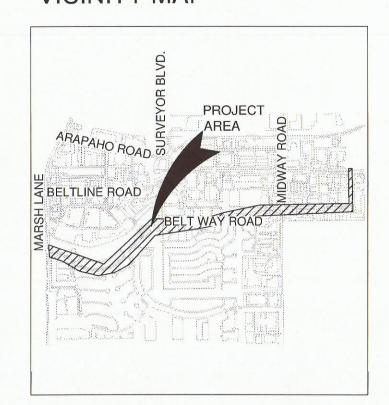

Project Name

Beltway Drive
Parkway Improvements
Addison, Texas


Project No: 14002

Issue Title

Issue Date: 09.29.2014

Construction Documents

Sea



Issue / Addenda / Revisions

Date	Description
06.25.2014	50% Review
07.31.2014	90% Review
09.29.2014	100% Bid Documents

Drawing Title

Layout Plan

Sheet No.

L2.10