BID 'A'- PLANT LIST, LIGHTING AND ELECTRICAL LANDSCAPE REPAIR

- 1. CONTRACTOR SHALL INVESTIGATE EXISTING IRRIGATION SYSTEM(S) PRIOR TO EXCAVATION.
- 2. CONTRACTOR SHALL MAKE REPAIRS AND ADJUSTMENTS AS NECESSARY AND TEST EXISTING IRRIGATION SYSTEM(S) AFTER THE ELECTRICAL AND STREET LIGHTING INSTALLATION.
- 3. CONTRACTOR SHALL REPORT TO THE TOWN OF ADDISON CONCERNING ANY IRRIGATION SYSTEM ISSUES/ REPAIRS/ ADJUSTMENTS AND TESTING RESULTS.
- 4. CONTRACTOR SHALL, UNDER THE TOWN'S DIRECTION, PREPARE NEW GROUNDCOVER BEDS/ REPAIRS TO EXISTING BEDS WITHIN AN ESTIMATED AREA OF 19,500 SQUARE FEET/ ALL AREAS TO BE GRADED SMOOTH PER GENERAL NOTES DESCRIBED ON LO.02.
- 5. CONTRACTOR SHALL INCORPORATE SOIL AMENDMENTS INTO REPAIR AREAS PER THE TOWN'S DIRECTION/ AN ESTIMATED 120 CUBIC YARDS OF BEDDING SOIL SHALL BE ALLOCATED FOR SOIL AMENDMENT.
- 6. GROUND COVER/ PURPLE WINTERCREEPER 4" POTS/ SPACING- APPROXIMATELY 12" ON CENTER SHALL BE INSTALLED PER THE TOWN'S DIRECTION.
- 7. CONTRACTOR SHALL INSTALL HARDWOOD MULCH IN ALL REFURBISHMENT OR NEW BED AREAS/ AN ESTIMATED 120 CUBIC YARDS OF MULCH SHALL BE ALLOCATED FOR BED AREAS.

NOTE: PLANTS (GROUNDCOVER) IS NOT GRAPHICALLY DEPICTED UPON DRAWINGS. INSTALL PER DIRECTION OF THE TOWN OF ADDISON. TOWN CONTACT: MICHAEL KASHUBA, LANDSCAPE ARCHITECT (972) 450-2831


BID 'B'- PLANT LIST, SCULPTURE PLAZA, TRAIL, CROSSWALKS AND RELATED WORK

PLANT QUANTITY	PLANT SYMBOL	COMMON NAME BOTANICAL NAME	SIZE MIN.	HEIGHT MIN.	SPREAD MIN.	COMMENTS
		TREES				
1	M	RED OAK	4" CAL	14'-16'	5'-6'	CONTAINER GROWN, MATCHED, WELL BRANCHED, STRONG
4		Quercus shumardii	100 GAL.	14-16	5-6	CENTRAL LEADER; MESA TO APPROVE
		ORNAMENTAL TREES				
		NEEDLEPOINT HOLLY	30	-1.41		CONTAINER GROWN; FULL AND WELL ROOTED; PLANT AT 5' O.C.
86	+	llex cornuta 'Needlepoint'	GAL.	5'-6'	3'-4'	CONTAINER CHOPA, FOLL AND PALLE 1900 FED, FEART AT 5 0.0.
	N	CRAPE MYRTLE 'NATCHEZ'	45	8'-9' 4'-5	4'-5'	CONTAINER GROWN, MATCHED, WELL BRANCHED, MULTI-TRUNK,
4	2 5	Lagerstroemia indica 'Natchez'	GAL.	8-9	4-5	MAX 4 CANES, TREE FORM, LIMBED TO 3' FEET
6	(2+)	SAVANNAH HOLLY	100	9'-10'	4'-5'	CONTAINER GROWN; FULL AND WELL ROOTED; PLANT AT 8' O.C.
6	لمتما	llex x attenuata 'Savannah'	GAL.	9 - 10	4-7	(MATCHED SPECIMENS)
		SHRUES				
_	X	AMERICAN BEAUTY BERRY	5	24"-36"	30"-36"	CONTAINER GROWN; FULL AND WELL ROOTED; PLANT AT 3' O.C.
7		Callicarpa americana	GAL.	24"-56"	20"-26"	
11	grande .	CORAL BERRY	3	15"-18"	18"-24"	CONTAINER GROWN; FULL AND WELL ROOTED; PLANT AT 2'-6" O.C.
11	0	Symphoricarpos orbiculatus	GAL.	15 -10	10 -24	
16	500	DRIFT ROSE- CORAL	5	12"-14"	18"-24"	CONTAINER GROWN; FULL AND WELL ROOTED; PLANT AT 3' O.C.
10	<.>>	Rosa redrazz 'Sunny'	GAL.	12 -1-	10 -24	
32	£13	CARISSA HOLLY	5	12"-15"	15"-18"	CONTAINER GROWN; FULL AND WELL ROOTED; PLANT AT 24" O.C.
02	had .	llex cornuta 'Carissa'	GAL.	12 13	15 10	
9	7+7	ANTHONY WATERER SPIREA	3	15"-18"	18"-24"	CONTAINER GROWN; FULL AND WELL ROOTED; PLANT AT 3' O.C.
	(+)	Spiraea x bumalda 'Anthony Waterer'	GAL.	13 10	10 21	
II		HOLLY FERN		15"-18"	15"-18"	CONTAINER GROWN; FULL AND WELL ROOTED; PLANT AT 18" O.C.
		Cyrtomium falcatum	GAL		10 10	
26	WWW.WWW.WWW.WWW.WWW.WWW.WWW.WWW.WWW.WW	ARTEMISIA POWIS CASTLE		10"-12"	0"- 2"	CONTAINER GROWN; FULL AND WELLROOTED, PLANT AT 18" O.C.
	Ammer .	Eragrostis lehmanniana	GAL.			WITH TRIANGULAR SPACING
		GROUNDCOVERS & PERRENIALS				
533 SF		INLAND SEA OATS		10"-12"	10"-12"	CONTAINER GROWN; FULL AND WELLROOTED, PLANT AT 18" O.C.
JJJ J		Chasmanthium latifolium	GAL.	10 12	10 12	WITH TRIANGULAR SPACING
965 SF		PURPLE WINTERCREEPER		6"-8"	10"-12"	CONTAINER GROWN; FULL AND WELL ROOTED, MINIMUM 4
100		Evonymus coloratus	GAL.		.,	RUNNERS; PLANT AT 12" O.C. WITH TRIANGULAR SPACING
1,300 SF		GIANT LIRIOPE		10"-12"	 0"- 2"	CONTAINER GROWN; FULL AND WELL ROOTED, PLANT AT 12" O.C.
.,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,		Liriope gigantea	GAL.			WITH TRIANGULAR SPACING
520 SF		ASIATIC JASMINE		6"-8"	10"-12"	CONTAINER GROWN; FULL AND WELL ROOTED, MINIMUM 4
		Trachelospermum asiaticum	GAL.			RUNNERS; PLANT AT 12" O.C. WITH TRIANGULAR SPACING
180		MONDO GRASS	4"	4"-6"	4"-6"	CONTAINER GROWN; FULL AND WELL ROOTED; PLANT AT 6" O.C.
	VASANANANA	Ophiopogon japonicus	POT			
100 SF		SEASONAL COLOR		N/A	N/A	SEASONAL COLOR PROVIDE SPECS FOR (3) CHANGE-OUTS
		Annuals				ALLOWANCE FOR 630/ 4" POTS@ 9" O.C.
400 SF		DAFFODIL	BULBS			PLANT BULBS IN GROUNDCOVER PER PLAN; SPACING AND LOCATION MUST BE APPROVED BY LANDSCAPE ARCHITECT/ 12 O.C.
	100000000	'Ice Follies' BERMUDA SOD (IRRIGATED)				ROLL, SAND AND LEVEL SOD TO SMOOTH FINISH GRADE;
7,500 SF		Celebration	SOD	N/A	N/A	MINIMUM 1/2" SOD SOIL MAT
	000000000000	DECOMPOSED GRANITE	1/4"-1/2"			50% NO. B AND 50% NO. 2; CLEAN, WASHED, NO SOIL OR
354 SF		Cactus Canyon Gravel, Color "Charcoal"	, , , , ,	N/A	N/A	WEED SEEDS, INSTALL TO A MIN. 3" DEPTH
		RIVER ROCK MULCH	2"-5"			LOCAL SOURCE: GOLDENTREE MAINTENANCE OR APPROVED
3,770		Brazos or Approved Equal		N/A	N/A	EQUAL. 3" MIN. DEPTH/ PLACE ATOP WEED-STOP FABRIC
	FILL STATE OF THE	HARDWOOD MULCH				
317 SF		17 (127) 102011		N/A	N/A	2" MIN DEPTH/SHREADED/DARK BROWN HARDWOOD
		4" STEEL EDGING	3/16"		2.22	
829 LF				4"	N/A	SUBMIT SAMPLE/ COLOR BLACK
JOTE, ALL	GUANTITIES	ARE PROVIDED AS A CONVENIENCE ONLY. ALL C	CONTRACTORS ARE	PESPONSIRI	F FOR THE	IR OWN VERIFIED BID QUANTITIES

Dallas, Texas 75201 214.871.0568 tel 214.871.1507 fax



VICINITY MAP

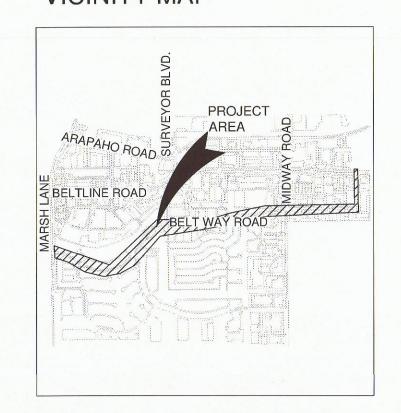

Project Name

Beltway Drive Parkway Improvements Addison, Texas

Project No: 14002

Issue Title

Construction Documents

Issue Date: 09.29.2014

This drawing and the design shown is the property of MESA Design Associates, known also as MESA. The reproduction, copying, or use of this drawing without the written consent of MESA is prohibited and any infringement will be subject to legal action. © Copyright 2012 MESA

Issue / Addenda / Revisions

	Date	Description
	06.25.2014	50% Review
	07.31.2014	90% Review
	09.29.2014	100% Bid Documents
1		

Drawing Title

Plant List

Sheet No.

L5.09