

SCALE: 1" = 20'-0"

NOTES:


- 1. CLEAN-UP OF DEBRIS FROM DEMOLITION SHALL BE PERFORMED ON A DAILY BASIS AND PER THE DIRECTION OF THE TOWN OF ADDISON.
- 2. ANY IRRIGATION LINES DAMAGED DURING CONSTRUCTION SHALL BE REPAIRED OR CAPPED PER TOWN OF ADDISON DISCRETION. CONTRACTOR SHALL PROVIDE SCHEDULE 40 SLEEVING OF APPROPRIATE SIZE FOR EXISTING PIPING AND WIRING WHERE SYSTEM CROSSES THE PROPOSED IMPROVEMENTS AND COORDINATE IRRIGATION HEAD RELOCATION WITH THE TOWN. RELOCATION OF VALVES, METERS, & OTHER APPURTENANCES TO BE COORDINATED W/TOWN STAFF.
- 3. PREPARE ALL DISTURBED AREAS FOR THE INSTALLATION OF SOLID SOD
- 4. TOWN OF ADDISON CONTACT: MICHAEL KASHUBA, LANDSCAPE ARCHITECT 972.450.2831
- 5. TOWN OF ADDISON TO HAVE OPPORTUNITY TO TRANSPLANT EXISTING PLANTS WITHIN PLANTER. (COORDINATE W/OWNER)
- 6. EXISTING UNDERGROUND UTILITIES: CONTRACTOR IS RESPONSIBLE FOR LOCATING AND PROTECTING ALL UTILITIES WITHIN & ADJACENT TO WORK AREA. SEE GENERAL NOTE #2. CONTRACTOR TO NOTIFY 1-800-DIGTESS PRIOR TO ANY EXCAVATION.
- 7. CONTRACTOR SHALL PROVIDE SIGNS AT EACH SIDEWALK CLOSURE TO STATE: "SIDEWALK CLOSED FOR REPAIRS- PLEASE USE ALTERNATE ROUTE." (OR AS APPROVED BY THE TOWN)

Scale: 1" = 20'-0"

1807 Ross Ave, Suite 333 Dallas, Texas 75201 214.871.0568 tel 214.871.1507 fax mesadesigngroup.com

MESA

VICINITY MAP

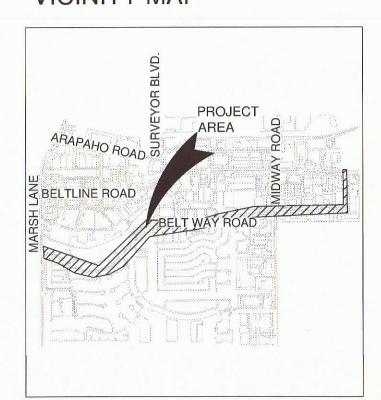

Project Name


Beltway Drive Parkway Improvements Addison, Texas

Issue Title

Project No: 14002

Construction Documents Issue Date: 09.29.2014

Seal

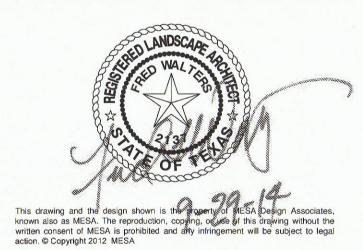

Issue / Addenda / Revisions

Date	Description
06.25.2014	50% Review
07.31.2014	90% Review
09.29.2014	100% Bid Documents
	we are the second of the secon
20 - 10 - 10	

Drawing Title

Demolition Plan-Landscape

Sheet No.

