


## NOTES:

- CLEAN-UP OF DEBRIS FROM DEMOLITION SHALL BE PERFORMED ON A DAILY BASIS AND PER THE DIRECTION OF THE TOWN OF ADDISON.
- 2. ANY IRRIGATION LINES DAMAGED DURING CONSTRUCTION SHALL BE REPAIRED OR CAPPED PER TOWN OF ADDISON DISCRETION. CONTRACTOR SHALL PROVIDE SCHEDULE 40 SLEEVING OF APPROPRIATE SIZE FOR EXISTING PIPING AND WIRING WHERE SYSTEM CROSSES THE PROPOSED IMPROVEMENTS AND COORDINATE IRRIGATION HEAD RELOCATION WITH THE TOWN. RELOCATION OF VALVES, METERS, & OTHER APPURTENANCES TO BE COORDINATED W/TOWN STAFF.
- 3. PREPARE ALL DISTURBED AREAS FOR THE INSTALLATION OF SOLID SOD
- 4. TOWN OF ADDISON CONTACT: MICHAEL KASHUBA, LANDSCAPE ARCHITECT 972.450.2831
- 5. TOWN OF ADDISON TO HAVE OPPORTUNITY TO TRANSPLANT EXISTING PLANTS WITHIN PLANTER. (COORDINATE W/OWNER)
- 6. EXISTING UNDERGROUND UTILITIES: CONTRACTOR IS RESPONSIBLE FOR LOCATING AND PROTECTING ALL UTILITIES WITHIN & ADJACENT TO WORK AREA. SEE GENERAL NOTE #2. CONTRACTOR TO NOTIFY 1-800-DIGTESS PRIOR TO ANY EXCAVATION.
- 7. CONTRACTOR SHALL PROVIDE SIGNS AT EACH SIDEWALK CLOSURE TO STATE: "SIDEWALK CLOSED FOR REPAIRS- PLEASE USE ALTERNATE ROUTE." (OR AS APPROVED BY THE TOWN)

1807 Ross Ave,
Suite 333

Dallas, Texas 75201
214.871.0568 tel
214.871.1507 fax
mesadesigngroup.com

# VICINITY MAP

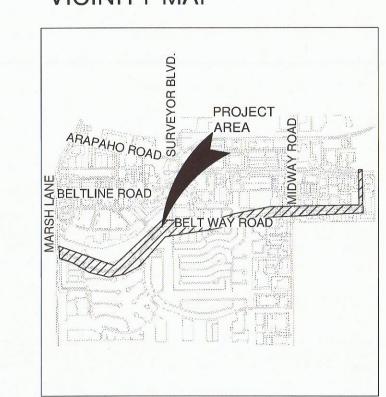

### **Project Name**

Beltway Drive
Parkway Improvements
Addison, Texas
Project No: 14002

#### **Issue Title**

Construction Documents

Issue Date: 09.29.2014

#### Seal



### Issue / Addenda / Revisions

Date	Description
06.25.2014	50% Review
07.31.2014	90% Review
09.29.2014	100% Bid Documents

# **Drawing Title**

Demolition Plan-Landscape

#### Sheet No.

L1.03

