


**CUT IN NEW 8" INCH
RESILIENT GATE VALVE
LOCATION TO BE FIELD
VERIFIED BY THE TOWN
OF ADDISON**

- NOTES**
1. The Town of Addison shall shut down existing waterlines during off-peak hours.
 2. Excavate and remove existing gate valves including pavement removal.
 3. Install new gate valve, including valve stack furnished to the site by the Town of Addison.
 4. Restore area with solid sod.
 5. Place 10-inch reinforced concrete pavement and curb, NCTCOG Item 745, Class "C" concrete: 3600 - psi compressive strength @ 28-days, minimum 6-sack mix, per cubic yard. Maximum water cement ratio 5.0.
 6. Backfill shall be select material (NCTCOG Item 2.1.8(c) compacted in place.
 7. Embedment shall be NCTCOG Grade 4 aggregate to spring line of pipe.

SCALE 1"=100

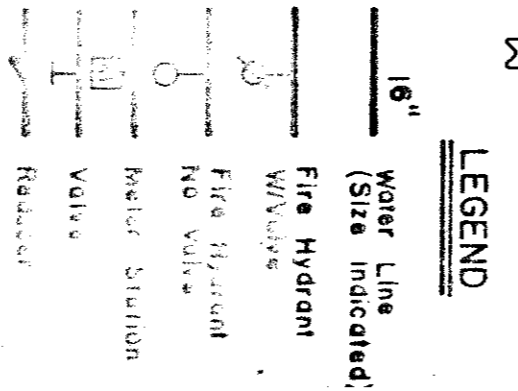

SHUT-OFF VALVE

CRESTVIEW SQUARE

QUORUM

LANMARK

INWOOD ROAD

BELT LINE ROAD

SLAPSHOT'S SPORTS GRILL
14885

CHILLY MART
14885

SIGELS LIQUOR
15003

BUCKHOORN LIQUOR
14825

BEVERAGE CITY
14823

WORLD LIQUOR
14821

GOURMET UNLIMITED
14819

BEAUTY OBSESSION
14817

JEWELRY
14815

FRANKLIN PRINTING
14800

ADDISON AUTOMOTIVE
14735

RED COTEMAN'S
14733

QUICKWAY
14731

