


LEGEND

- Existing Water Main
- Existing Sewer Main
- Existing Water Service
- Existing Sewer Service
- Proposed Water Service
- Proposed Sewer Service
- Existing Manhole
- Existing Fire Hydrant
- └ Existing Bullhead Tee
- Existing Cleanout


LEGEND

- BID ITEM NUMBER**
- 1 (A) Install 3/4" water tap and service with concrete meter box.
 - 2 (B) Install 3/4" water tap and service with concrete meter box including boring underneath existing pavement.
 - 3 (C) Install 1" water tap with 3/4" bullhead services and concrete meter boxes including boring underneath existing pavement.
 - 4,5,6 (D) Verify water service exist to lot. If water service is located and no meter box exist, install concrete meter box. If service does not exist, do Item A.
 - 4,5,7 (F) Verify water service exist to lot. If water service is located, and no meter box exist, install concrete meter box. If service does not exist, do Item B.
 - 4,5,8 (G) Verify water services exist to lots. If water services are located and no meter boxes exist, install concrete meter boxes. If services do not exist, do Item C.
 - 9 (I) Relocate existing fire hydrant to property line.
 - 10 (K) Install 4" sanitary sewer service including boring underneath existing pavement.

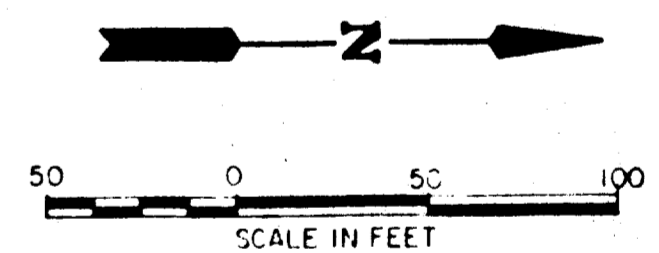

**UTILITY SERVICE ADJUSTMENTS
WATERFORD ADDITION**

FERGUSON-DEERE INC. - ENGINEERS
9817 KINGSLEY RD. - DALLAS TX. 75238
MAY 1991 SCALE 1"=50'

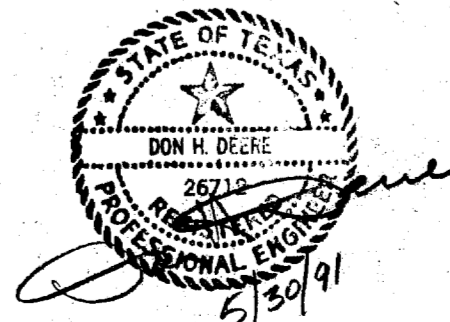

e/e