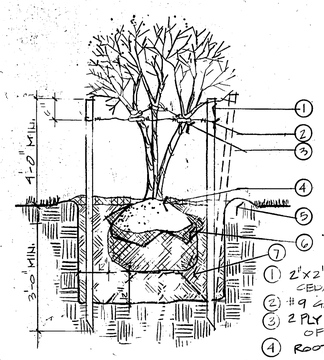

1. 2"X2"X8' CONSTRUCTION GRADE CEDAR STAKES, STRAIGHT SOUND
2. #9 GALVANIZED GUY WIRE
3. 2 PLY FABRIC BEARING HOSE INSIDE DIG. OF NOT LESS THAN ½" TO ENCASE WIRE
4. ROOTBALL CROWN AT FINISH GRADE
5. 2" SAUCER
6. REMOVE TOP ⅓ BURLAP
7. APPROVED BACKFILL

TREE STAKING DETAIL

N.T.S.

PLANT SCHEDULE

BOTANICAL NAME	COMMON NAME	QTY.	SIZE	MINIMUM HT. AND SPREAD	REMARKS
TREES:					
QUERCUS VIRGINIANA	LIVE OAK	19	8" CAL.	18' HT. MIN.	- BRANCHING AT 6', MULTI-TRUNK, 3 TRUNK MIN.
ULMUS CRASSIFOLIA	CEDAR ELM	26	6½" CAL.	15' HT. MIN.	- BRANCHING AT 6', SINGLE STRAIGHT TRUNK
TAXODIUM DISTICHUM	BALD CYPRESS	32	3½" CAL.	10' HT. MIN.	- SINGLE STRAIGHT TRUNK, MATCHED
SOPHORA AFFINIS	EVE'S NECKLACE	17	2" CAL.		
MYRICA CERIFERA	WAX MYRTLE	65	8'-10' HT.	3' SP. MIN.	- TREE FORM, BRANCHING AT 3', MULTI-TRUNK, 3 TRUNK MIN., STAKE & GUY
SHRUBS:					
PHOTINIA FRASERI	FRASER'S PHOTINIA	109	5 GAL.	30" HT. MIN.	- CONTAINER GROWN, FULL PLANT PLANT 36" O.C.
RHUS LANCEOLATA	PRAIRIE FLAME-LEAF SUMAC	47	6'-7' HT.		- 3 CANES MIN. PER PLANT, PLANT 7'-0" O.C.
CHAENOMELES SPECIOSA	FLOWERING QUINCE	385	5 GAL.	20" HT. MIN.	- CONTAINER GROWN, FULL PLANT SPACE 24" O.C.
ILEX CORNUTA 'ROTUNDA'	ROTUNDA HOLLY	779	5 GAL.	20" HT. MIN.	- CONTAINER GROWN, FULL PLANT, SPACE 24" O.C.
VINES:					
GELSEMIUM SEMPERVIRENS	CAROLINA JESSAMINE	4-	1 GAL.		- CONTAINER GROWN, FULL PLANT, MIN. 4 RUNNERS 24" LONG, WIRE TO FENCE
CAMPSIS RADICANS 'MADAME GALEN'	TRUMPET VINE	15	1 GAL.		- CONTAINER GROWN, FULL PLANT, MIN. 3 RUNNERS 30" LONG, WIRE TO FENCE
PARTHENOCISSUS TRICUSPIDATA	BOSTON IVY	-/	1 GAL.		- CONTAINER GROWN, FULL PLANT, MIN. 3 RUNNERS 30" LONG, STAKED PLANTS
GROUND COVER:					
LIRIOPE MUSCARI	CREEN LIRIOPE	14,386	1 GAL.	8" SP. MIN.	- FULL PLANT, FOLIAGE TO COVER TOP OF CONTAINER, PLANT 12" O.C.
OTHER:					
CYNODON SPP. COMMON	COMMON BERMUDA				- HYDROMULCH LAWN AREAS
SEASONAL COLOR		721	4" POTS		- TO BE SELECTED BY LANDSCAPE ARCHITECT

NOTE! PLANT LIST IS AN AID TO BIDDERS ONLY. VERIFY ALL QUANTITIES ON PLAN.

NOTES:

1. UNDERGROUND UTILITIES TO BE PLOTTED BEFORE CONSTRUCTION REF. CIVIL DRAWINGS FOR LOCATION.
2. STEEL EDGING LOCATED BETWEEN ALL PLANTING BEDS AND LAWN AREAS

RESERVOIR

MATCHLINE A

- 5-LIVE OAK 20'-0" O.C. 8" CAL. MULTI-TRUNK
- 8-WAX MYRTLE 8'-10' HT. MULTI-TRUNK 10'-0" O.C.
- 30-FRASER'O PHOTINIA 5 GAL 36" O.C.
- 240-PVF. ROTUNDA HOLLY 5 GAL, 24" O.C.
- 5-SUMAC 6'-7' HT. 7'-0" O.C.
- 3-CEDAR ELM 20'-0" O.C. 6½" CAL.

- EXISTING HACKBERRY TO REMAIN UNDISTURBED
- 3-LIVE OAK 20'-0" O.C. 8" CAL. MULTI-TRUNK
- 25-CAROLINA JESSAMINE 1 GAL 10'-0" O.C.
- 2,193 LIRIOPE 1 GAL 12" O.C.
- 5-EVE'S NECKLACE 15'-0" O.C. 2" CAL.

- 5-SUMAC 6'-7' HT. 7'-0" O.C.
- LAWN
- LAWN
- 915-LIRIOPE 1 GAL, 12" O.C.
- 3-WAX MYRTLE 8'-10' HT. MULTI-TRUNK 10'-0" O.C.
- 1-CEDAR ELM 3" CAL.
- 3-WAX MYRTLE 8'-10' HT. MULTI-TRUNK 10'-0" O.C.

- 5-WAX MYRTLE 8'-10' HT. MULTI-TRUNK 10'-0" O.C.
- 1788-LIRIOPE 1 GAL 12" O.C.
- 3-CEDAR ELM 20'-0" O.C. 6½" CAL.
- 5-BALD CYPRESS 15'-0" O.C. 3½" CAL.
- 5-SUMAC 6'-7' HT. 7'-0" O.C.

BELT LINE ROAD

- 5-SUMAC 6'-7' HT. 7'-0" O.C.
- 5-BALD CYPRESS 3½" CAL. 15'-0" O.C.
- 65-FLOWER QUINCE 5 GAL. 24" O.C.

- LAWN
- 9-TRUMPET VINE 1 GAL. 20'-0" O.C.
- 6-EVE'S NECKLACE 15'-0" O.C. 2" CAL.
- 2-LIVE OAK 20'-0" O.C. 8" CAL. MULTI-TRUNK
- 1758-LIRIOPE 1 GAL. 12" O.C.

PLANTING PLAN

SCALE: 1"=20'-0"

STATE OF TEXAS — LINDA TYCHER — 566 — REGISTERED LANDSCAPE ARCHITECT

17/44

BELTWOOD RESERVOIR EXPANSION

PLANTING PLAN

DALLAS WATER UTILITIES
CITY OF DALLAS, TEXAS

Turner Collie & Braden Inc.

LINDA TYCHER & ASSOCIATES landscape architecture

DESIGN		CONTRACT NO. 89-79	SHEET NO. 17
DRAWN		FILE NO. 630Q700F	OF 44
TRACED			
CHECKED			
DATE			

TELEPHONE POST