

GENERAL INSTALLATION NOTES:

1. WATER METER SHALL BE PLACED IN CENTER OF LOT WITH THE SANITARY SEWER SERVICE TO BE LOCATED 10' DOWNSTREAM.
2. METER AND BOX SHALL BE SET BY THE CONTRACTOR TO ADDISON STANDARDS IN ALL CASES.
3. THE METER BOX SHALL BE SET WITHIN THE R.O.W. OR A DEDICATED UTILITY EASEMENT. IN ALL CASES, THE METER BOX SHALL BE PROTECTED FROM VEHICULAR TRAFFIC.
4. WATER SERVICES SHALL NOT BE CONNECTED TO DEAD END LINES OR FIRE HYDRANT LEADS.
5. ALL MATERIALS SHALL CONFORM TO THE TOWN OF ADDISON WATER SYSTEM REQUIREMENTS.


Type "K" Copper Service Pipe.	Double Strap Bronze Service Saddle with C.C. Threads	East Jordan Iron Works Galvanized Meter Box With Iron Ring & Cover				
		Min. Dia.	Covers & Rings	Min. Ht.	Min. Con Weight	Min. Total Weight
3/4 inch	3/4 inch	18 inches	12 3/4 inches	18 inches	13 lbs.	42 lbs.
1 inch	1 inch	24 inches	20 1/2 inches	18 inches	17 lbs.	98 lbs.
1 1/2 inch	1 1/2 inch	28 inches	20 1/2 inches	18 inches	20 lbs.	127 lbs.
2 inch	2 inch	28 inches	20 1/2 inches	18 inches	20 lbs.	127 lbs.

Service Connection with Meter Box

DATE: AUGUST, 2010 REV. DATE: SHEET: 50-1000

Kimley-Horn and Associates, Inc.
 2700 West Central Expressway, Suite 800
 Irving, TX 75039
 Phone: 972-770-8800
 Fax: 972-770-8801

Revision: 1 REVISD TOWN DETAILS
 Date: 8/26/11

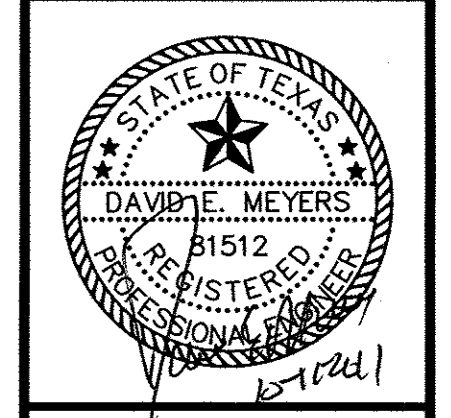

Keller Springs Lofts
Loft Apartments in Addison
 Town of Addison, Texas

WATER DETAILS

DATE:	OCTOBER 11, 2011
DESIGN:	KHA
DRAWN:	KHA
CHECKED:	KHA
KHA NO.:	06-4362003
CITY NO.:	

SHEET
C22a