

STA. 0+80.44 "B"-10' RT
INSTALL 1-45° BEND (48")
PAY ITEM 465.71

CONC. ENCASE 20 LF
EX. SAN. SWR. SEE
DETAIL SHIT. NO. 28
PAY ITEM 465.9

20 LF EX. W.L.
TO BE LOWERED
PAY ITEM 479.7

RELOCATE EXIST. W.L.
SEE DETAIL SHIT. NO. 16
PAY ITEM 479.4

STA. 1+92 KELLER SPRINGS-10' RT.
CONST. JUNCT. BOX NO. 1
TOP = 632.61 RL = 623.56
SEE DETAIL SHIT. NO. 18
PAY ITEM 475.1

10 LF EX. W.L.
TO BE LOWERED
PAY ITEM 479.7

STA. 4+00
INSTALL 1-5' REC INLET
T.C. = 631.90
R.L. = 627.40
PAY ITEM 470.1

STA. 4+04
INSTALL 1-10' REC. INLET
T.C. = 631.96
R.L. = 627.46
PAY ITEM NO. 470.2

STA. 3+21.43
INSTALL 2-10' REC. INLETS
T.C. = 631.11 (MOD.)
R.L. = 626.11
PAY ITEM NO. 470.2


EXIST. CULVERT
TO BE REMOVED
PAY ITEM NO. 100

EXIST. CULVERT
TO BE REMOVED
PAY ITEM NO. 100

15 LF EA. EXIST. W.L.
TO BE LOWERED
PAY ITEM 479.7

TBM - " " cut on N.W. top curb, corner of parking lot,
Building 15950 Midway Road.
Elevation 634.57
TBM - " " cut on S.W. top curb, corner of parking lot,
6128 Keller Springs Road 1/4 mile west of Midway Plaza
Elevation 634.62

1-07-0013 JWL Investments

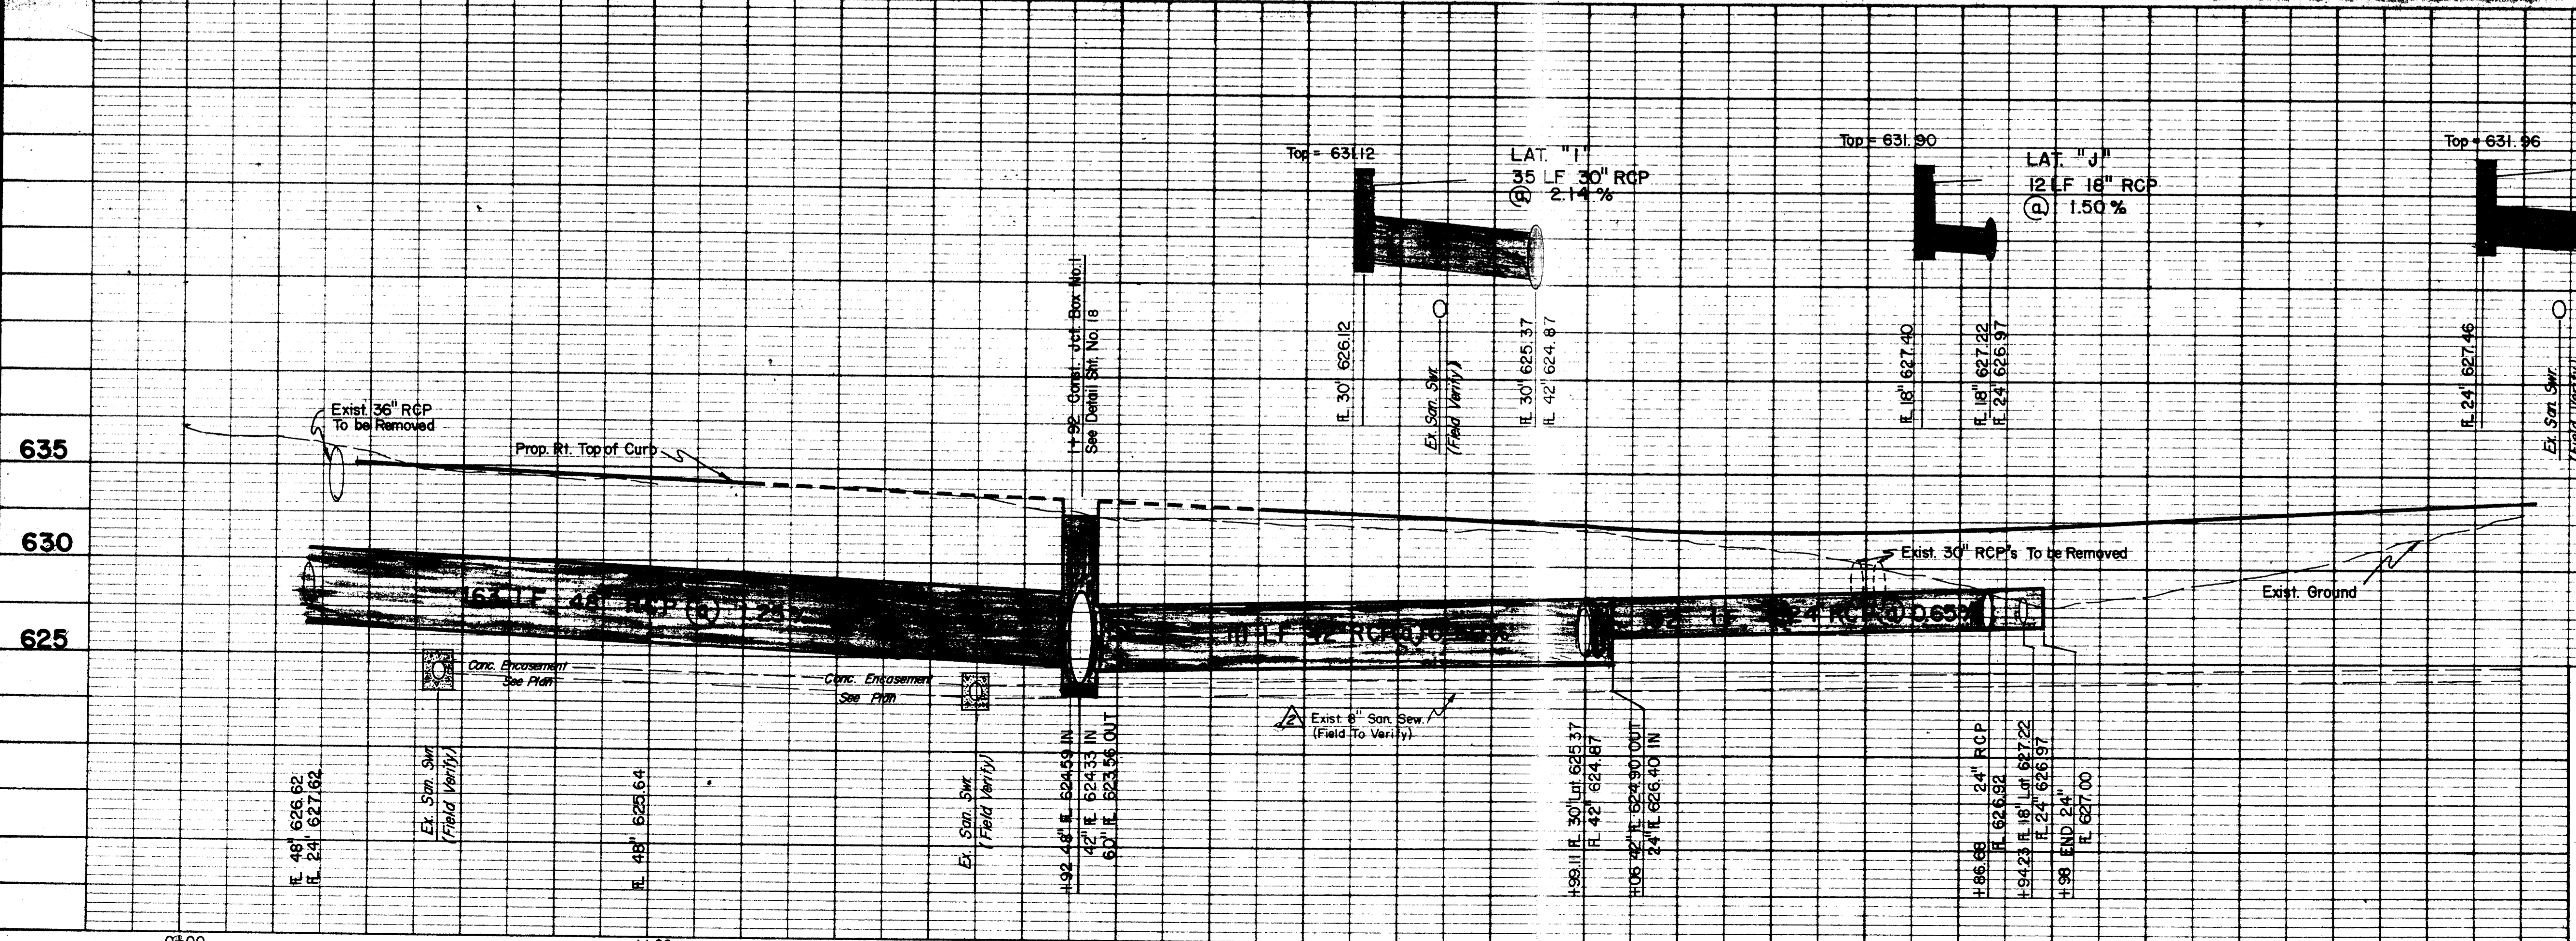

Added Exisit. 8" San. Sew. To Profile		RLO	10/18/86
Added Exisit. Gas Line Location		RLO	8/18/86
No.	Revision	By	Date
TOWN OF ADDISON DALLAS COUNTY, TEXAS KELLER SPRINGS/DOOLEY RD. IMPROVEMENTS DRAINAGE KELLER SPRINGS LAT. "H" - STA. 5+00 GINN, INC. Consulting Engineers Dallas, Texas			
Designed - RLO	Drawn - RLO	Date - JUNE, 1986	Job No. - 265
Approved - HWG	Checked - JCK	Scale - 1" = 20' H / 1" = 5' V	Sheet 15 Of 30.