


- STORM DRAINAGE GENERAL NOTES**
1. ALL MATERIALS AND WORKMANSHIP SHALL CONFORM TO THE CITY OF ADDISON STANDARDS AND SPECIFICATIONS.
 2. ALL REINFORCED CONCRETE PIPE SHALL BE MINIMUM CLASS III PIPE WITH TONGUE AND GROOVE JOINTS. RAM NECK SEALER OR APPROVED EQUAL SHALL BE USED IN ALL PIPE JOINTS.
 3. STORM DRAINAGE PIPE LESS THAN 15" DIAMETER SHALL BE EXTRA STRENGTH NONREINFORCED CONCRETE PIPE, VITRIFIED CLAY PIPE OR PVC PIPE AT THE CONTRACTOR'S OPTION WITH THE ENGINEER'S APPROVAL.
 4. WHENEVER A SMALLER PIPE IS JOINTED END-TO-END TO A LARGER PIPE, A CONCRETE COLLAR SHALL BE PLACED AROUND THE PIPES OVER THE JOINT.
 5. THE CONTRACTOR SHALL VERIFY LOCATION OF ALL UTILITIES PRIOR TO BEGINNING WORK AND SHALL PROTECT EXISTING IMPROVEMENTS DURING CONSTRUCTION.
 6. ALL TRENCH BACKFILL FOR STORM SEWER SHALL BE COMPACTED AS REQUIRED BY CITY, BUT IN NO CASE SHALL THE TOP 12" BE COMPACTED TO LESS THAN 90% STANDARD PROCTOR WITH THE REMAINDER BEING COMPACTED TO THAT OF ADJOINING SOIL CONDITIONS.
 7. CRUSHED STONE BEDDING OR APPROVED EQUAL WILL BE PROVIDED WHEN ROCK IS ENCOUNTERED IN STORM SEWER TRENCHES.
 8. ALL DRAINAGE STRUCTURES SHALL BE 3000 PSI CONCRETE AT 28 DAYS UNLESS OTHERWISE NOTED ON PLANS.

- GRADING GENERAL NOTES**
1. STRIP TOP 3" OF TOPSOIL AND REUSE AS FILL MATERIAL OUTSIDE PAVED AREA.
 2. ALL FILL SHALL BE COMPACTED TO 95% PROCTOR DENSITY IN A MAXIMUM OF SIX (6) INCH LIFTS.
 3. IT WILL BE THE RESPONSIBILITY OF THE CONTRACTOR TO PROTECT ALL PUBLIC UTILITIES IN THE CONSTRUCTION OF THIS PROJECT.

PHASE I
FF ELEVATION 628.65'

PHASE II
FF ELEVATION 628.65'

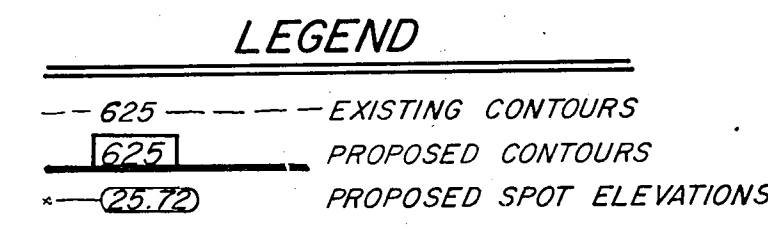

NOTE: THIS BASE SHEET WAS FURNISHED TO JACK R. DAVIS AND ASSOC. BY HKS.

BENCHMARK: SQUARE CUT ON TOP OF CURB OF LIBERTY PLAZA ISLAND N.E. CORNER OF LIBERTY PLAZA ELEV. = 628.15

JACK R. DAVIS & ASSOCIATES, INC.
consulting civil engineers & surveyors
2902 Carlisle Street Dallas, Texas 75204

HARWOOD K SMITH & PARTNERS
Architects/Engineers/Planners
1111 Plaza of the Americas North, LB 307
Dallas, Texas 75201 214/748-6261

HKS

t.f. stone companies dallas, texas

liberty plaza

Job No:
Revisions:
18/20/84
ADDENDUM # 2

Sheet Title:
STORM SEWER GRADING PLAN

Date:
7/24/84

Drawn:
C 2

Sheet No:
C 2

of sheet
18/70