



ESTIMATED QUANTITIES			
ITEM	DESCRIPTION	UNIT	QUANTITY
100	Prepare Roadway R.O.W	Sta.	5
104.1	Remove Old Concrete, Pavement & Median	LF	59
104.2	Sawed Break-Out Groove	LF	59
110	Unclassified Road Excavation (Dens Cont.)	CY	3762
160	Placing 4\"/>Topsoil	CY	
248	6\"/>Flex Base (Dens Cont)(Ty A, Gr 2, Cl 3)	CY	
260.1	Lime (Ty A) Slurry Method	Ton	44.11
260.2	6\"/>Lime Treated Subgrade (Dens Cont)	SY	3528.89
340.1	3\"/>Hot Mix Asphalt (Ty D) Resurf Shoulder	Ton	69.67
340.2	6\"/>Hot Mix Asphalt (Ty B)	Ton	607.02
360.1	6\"/>Conc Pavement (3000 PSI)	SY	5254.82
360.2	6\"/>Conc Monolithic Curb(3000 PSI)	LF	1556
360.3	4\"/>Non-Reinf Conc in Median(2000PSI)	SY	140
360.4	Conc. St. Header	LF	78
479.1	Adjust Water Valves	EA	7
522	Conc Curb & Gutter Class A	LF	
524	Conc Driveways, Appr 5\"/>Reinf Conc(3000PSI)	EA	192.5
630.1	Foundation (Ty A) Traffic Sig In Place	EA	4
630.2	Foundation (Ty B) Traffic Sig In Place	EA	
630.3	Foundation (Ty C) Traffic Sig In Place	EA	4
630.4	Foundation (Ty D) Illumination	EA	2
640.1	1/2\"/>PVC Conduit, Furnish & Install	LF	500
640.2	2\"/>PVC Conduit, Furnish & Install	LF	433
640.3	3\"/>PVC Conduit, Furnish & Install	LF	475
640.4	Pull Box, Complete In Place	EA	8
752.1	Traffic Buttons-Single Refl Ty P15 White	EA	40
752.2	Traffic Buttons-Single Refl Ty P18-1 White	EA	38
754.1	Traffic Buttons-Nonrefl, Ty P7 White	EA	200

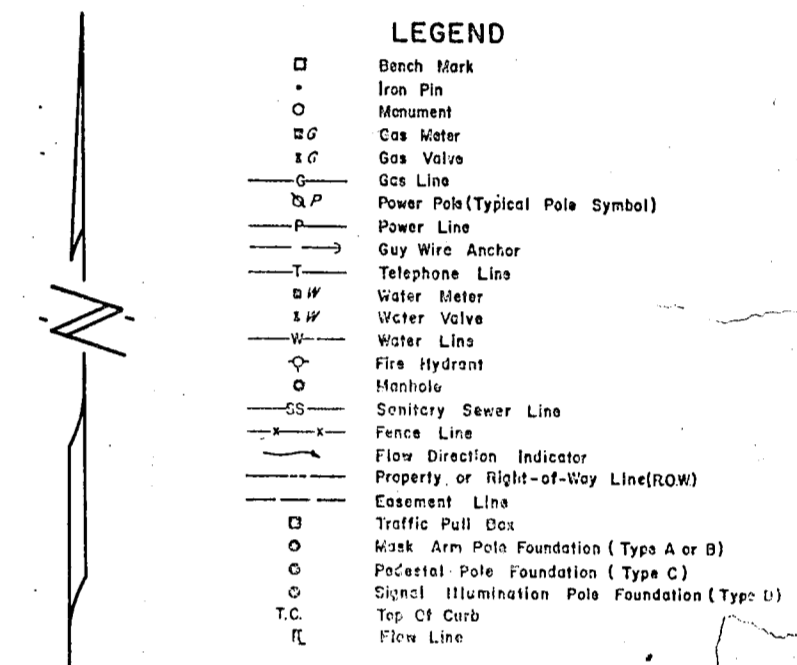

B.M. "B" 8" o" Top Of Curb At N.W. Corner Of Parking Lot For Gulf Oil Station At S.W. Corner Int. Midway & Belt Line, ELEV = 624.32

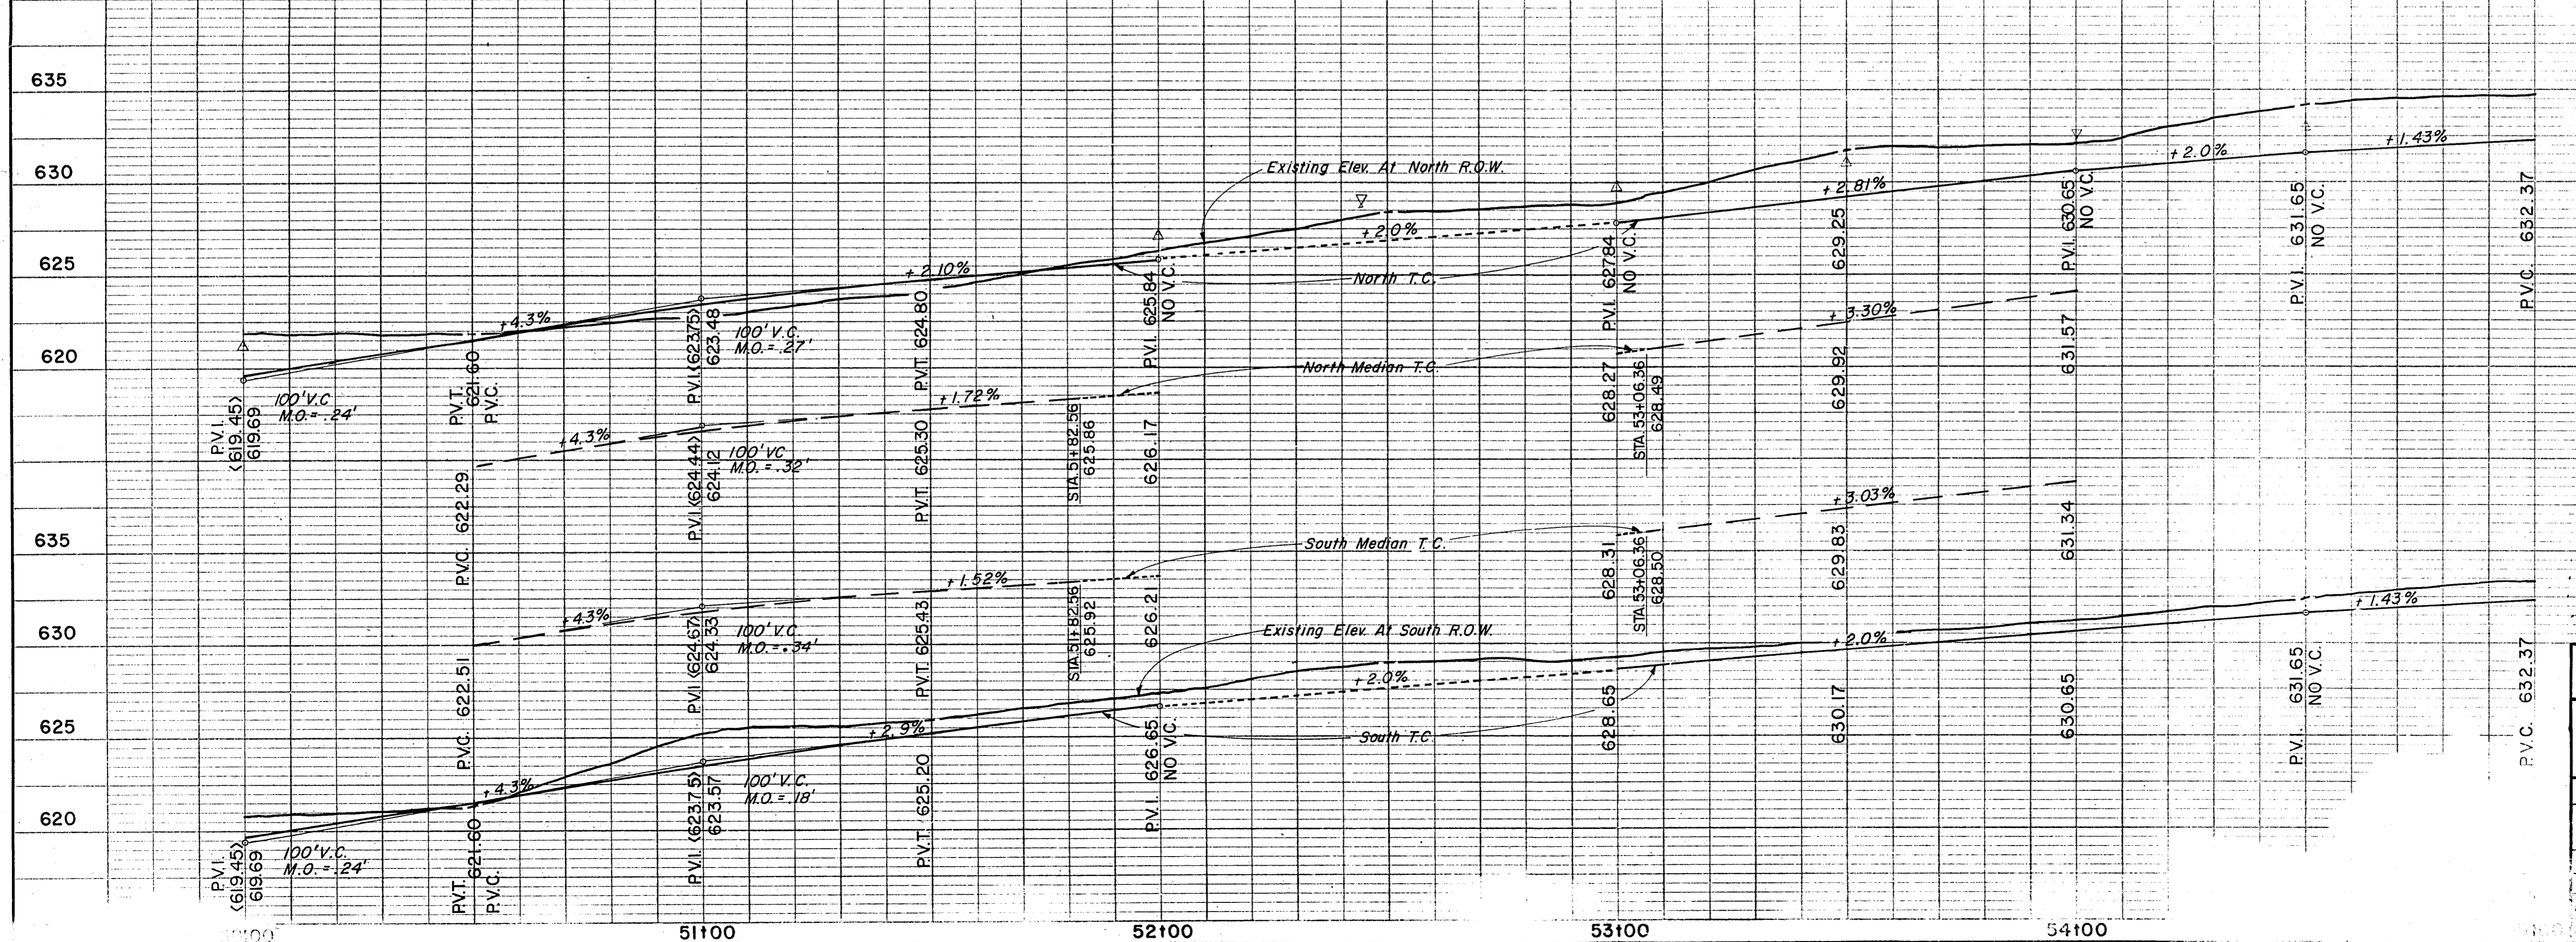

3	Add Drive
2	Moved drive
1	Add Drive
No.	

CITY OF HOUSTON
COUNTY OF HARRIS
 DEPARTMENT OF
PAVING
 2501 W. LOOP WEST
 HOUSTON, TEXAS 77057
 PREPARED BY: H.B.J. CHECKED BY: H.V.C.