

ENLARGEMENT PLAN A
1"=10'-0"
0 5 10 20


PLANT LIST

BOTANICAL NAME	COMMON NAME	QUANTITY	SIZE	REMARKS
<i>Ilex cornuta</i> 'burfordii'	Dwarf Burford Holly	90	5 gal.	cont. full 20' spread
<i>Pyrus calleryana</i> 'Cleveland'	Cleveland Select Pear	6	4" cal.	cont. 15' ht. 5' spread matching
<i>Trachelospermum asiaticum</i>	Asian Jasmine	1233	4" pots	cont. 3 runners min.
	Seasonal Color	1577	4" pots	cont. selection by Owner

* NOTE: Plant list is an aid to bidders only. Verify all quantities on plan.

LANDSCAPE NOTES

- Contractor shall verify locations of all existing and proposed site elements and notify Architect of any discrepancies. Survey data of existing conditions was provided by others.
- Contractor shall locate all existing underground utilities and notify Architect of any conflicts. Contractor shall exercise caution when working in the vicinity of underground utilities.
- Contractor is responsible for obtaining all required landscape and irrigation permits.
- Contractor to provide a minimum 2% slope away from all structures.
- All planting beds and lawn areas to be separated by steel edging.
- All landscape areas to be 100% irrigated with an underground automatic irrigation system.
- Landscape contractor shall submit 'as built' drawings at the completion of the project.
- Landscape areas must be permanently maintained in a healthy growing condition at all times.
- Property Owner is responsible for regular weeding, mowing of grass, irrigating, fertilizing, pruning and other permanent maintenance of all plantings as needed.
- All plant material shall be mulched with a two-inch layer of bark mulch. (refer to specifications)
- All trees shall be planted a minimum of 3'-0" away from curbs, walks, walls, structures, etc.

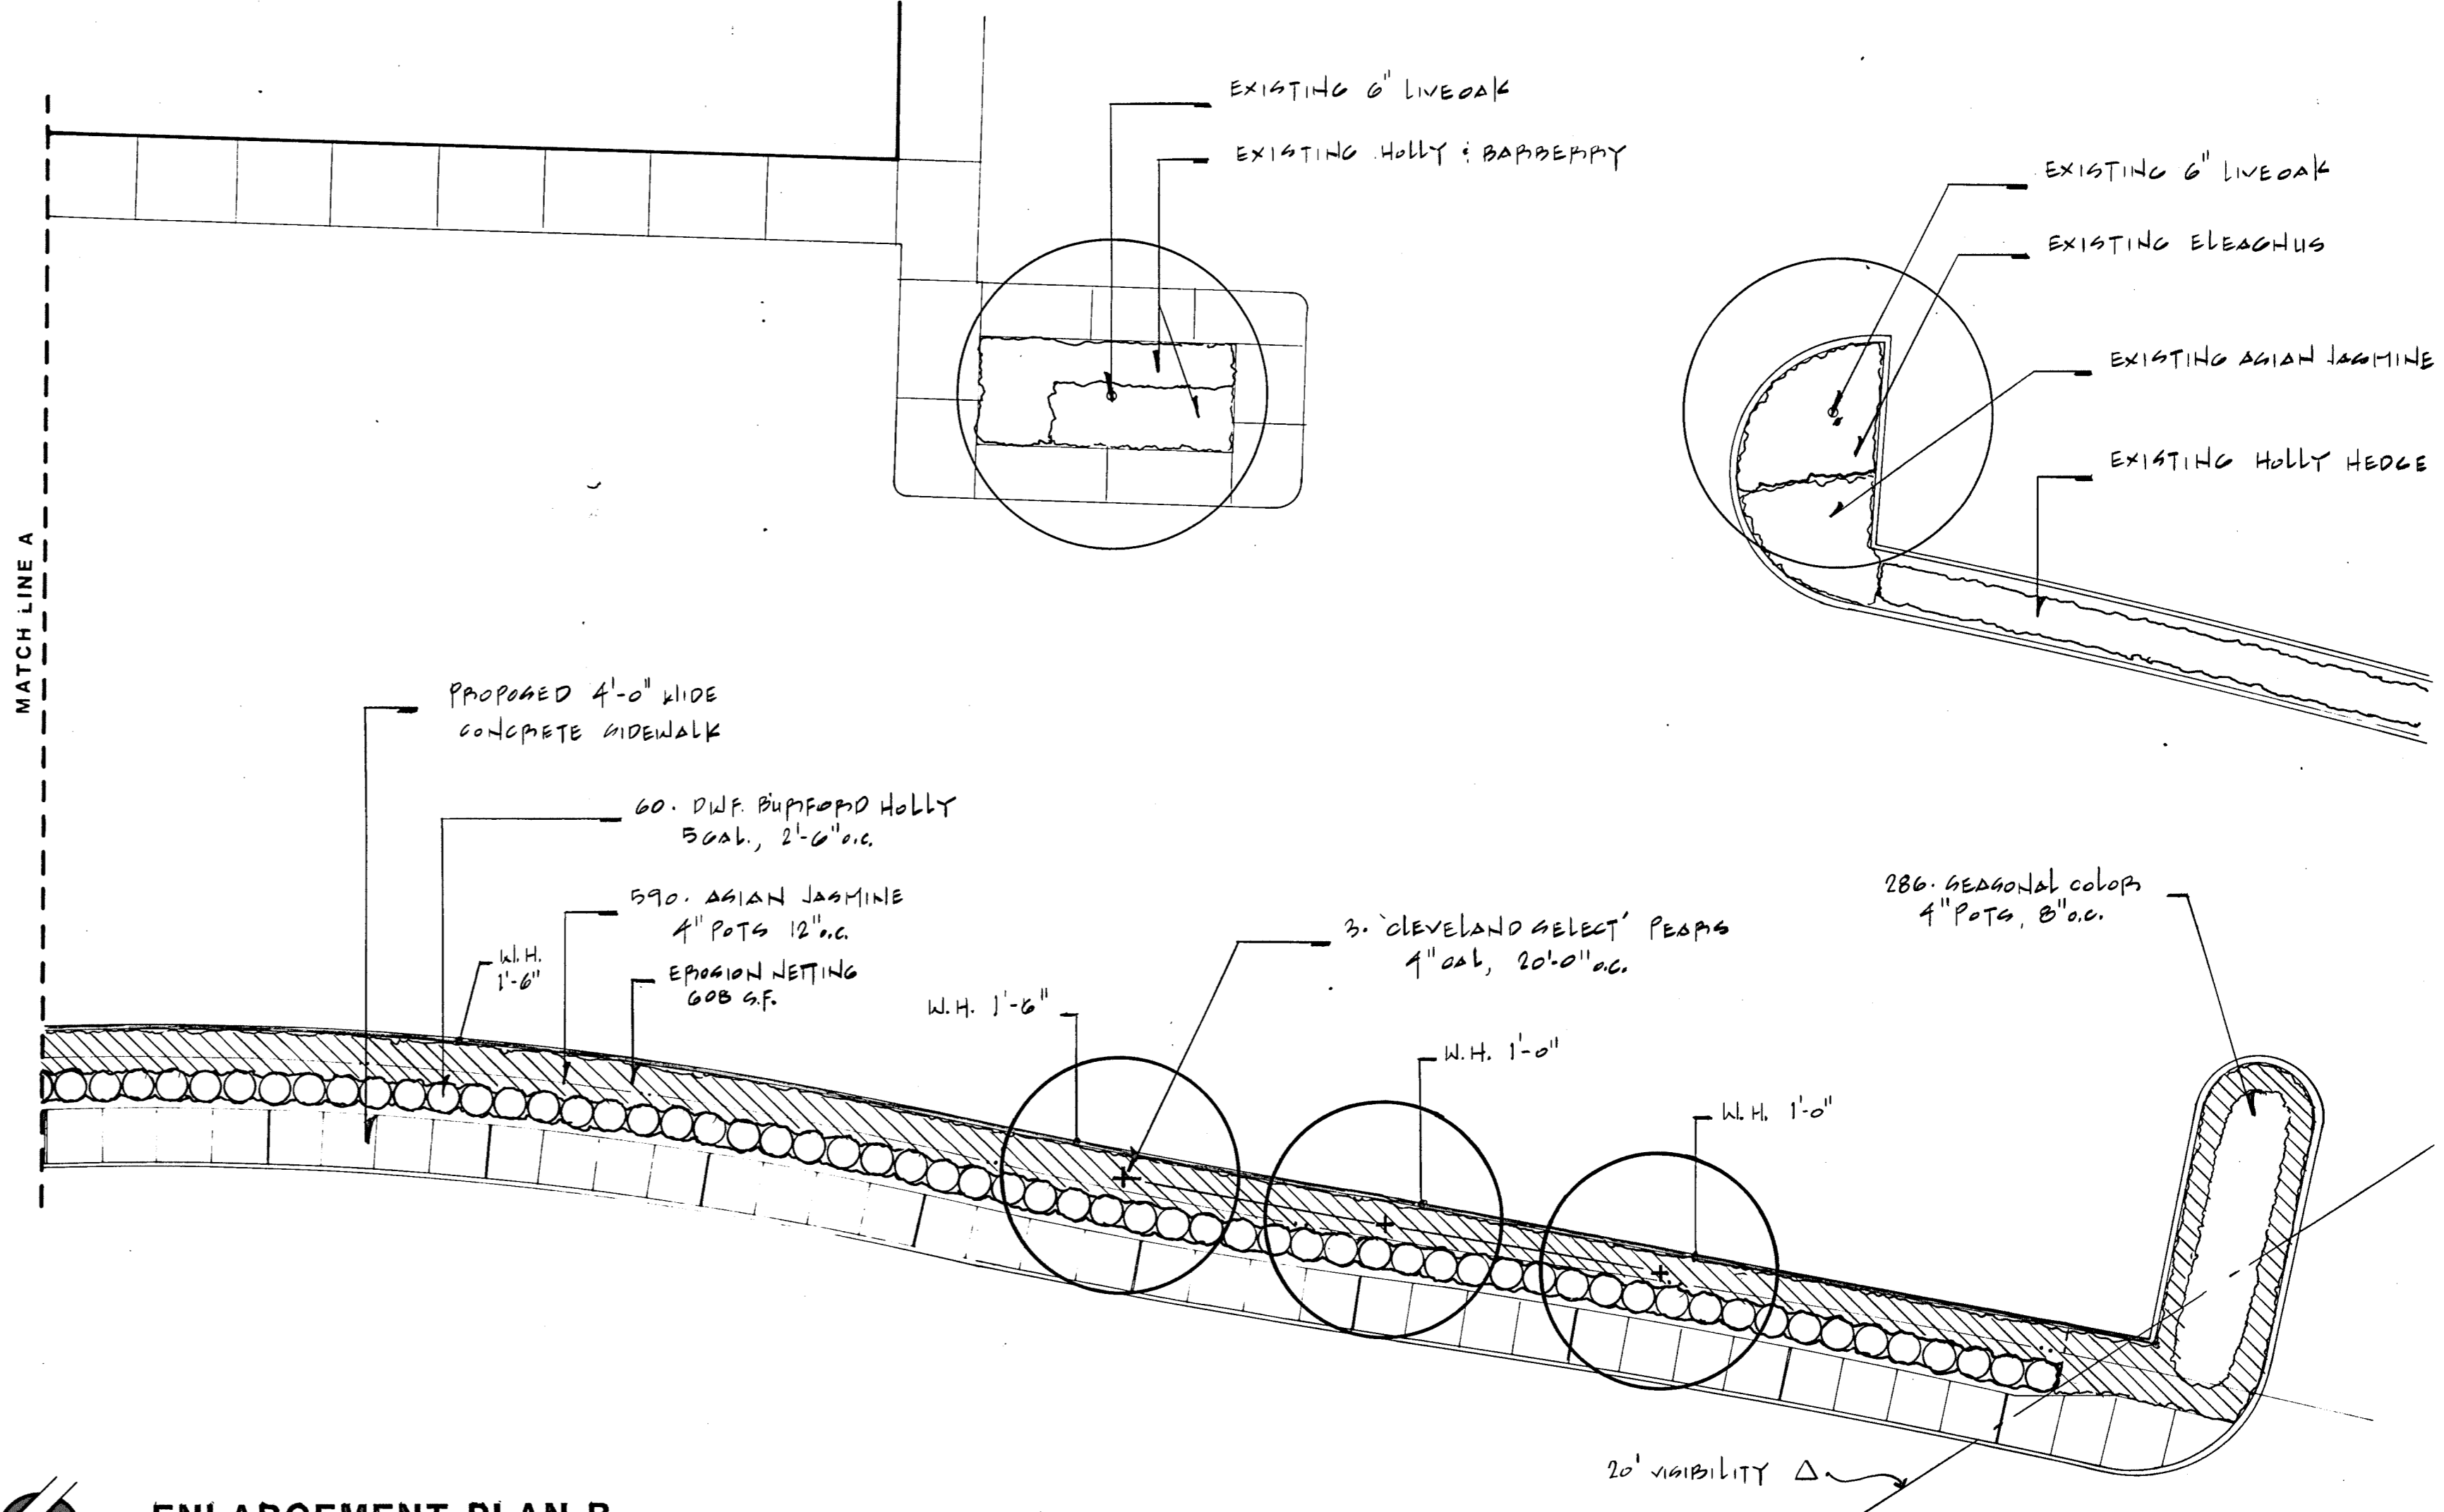

ENLARGEMENT PLAN B
1"=10'-0"
0 5 10 20

INTERSECTION IMPROVEMENTS
BELT LINE ROAD / MONTFORT DRIVE
TOWN OF ADDISON

DATE: 8-13-95
DRAWN BY: BA
CHECKED BY: SP
REVISIONS:

PROJECT NO. _____