



JANI KING CALL CENTER
4393 SUNBELT DRIVE
ADDISON, TEXAS

REVISIONS
ADDENDUM 1
01-09-09
ADDENDUM 2
01-29-09

PROJECT NUMBER
2008195

ISSUE
FEBRUARY 9, 2009

SHEET NAME

CONSTRUCTION PLAN

SHEET

A2.01

LEGEND OF SYMBOLS:

- EXISTING WALL TO REMAIN
- NEW WALL
- WALL TYPE
- NEW WINDOW; REF: A9.01
- NEW DOOR; REF: A9.01
- ELEVATION

CONSTRUCTION KEY NOTES:


- 1 PROJECTOR PROVIDED BY OWNER, INSTALLED BY CONTRACTOR.
- 2 NEW GRAB BARS LOCATED 36" A.F.F.
- 3 PROVIDE AND INSTALL SHELF AND COAT ROD.
- 4 RE-LAMINATE EXISTING UPPER AND LOWER CABINETS.
- 5 CONFIRM 1 HOUR FIRE RATED CONSTRUCTION AT EXISTING ELECTRICAL ROOM AND STORAGE.
- 6 MONITOR & MOUNTING BRACKET PROVIDED BY OWNER, INSTALLED BY CONTRACTOR. PROVIDE BLOCKING AS REQUIRED.
- 7 PROVIDE AND INSTALL 8' WIDE MANUAL PROJECTION SCREEN. SPEC: DALITE OR EQUAL.
- 8 EXISTING BACK DOOR TO EXTERIOR - REPAIR SEALS, THRESHOLDS, ETC. TO PREVENT INCOMING MOISTURE.
- 9 NEW CORNER GUARD CG-1 UP TO TO 8'-11"; RE: 11/AB.04, 12/AB.04, & 08/AB.05

WALL TYPES:

- A 3/8" MTL STUDS, 22 GA., @ 2'-0" O.C. W/ (1) LAYER OF 5/8" GYP. BD. ON EACH SIDE TO UNDERSIDE OF EXISTING HEADER.
- B ONE HOUR FIRE RATED 3/8" MTL STUDS, 22 GA., @ 2'-0" O.C. W/ (2) LAYERS OF 5/8" GYP. BD. ON EACH SIDE TO UNDERSIDE OF DECK UL# U485.

GENERAL CONSTRUCTION NOTES:

- 1. ALL DIMENSIONS ARE TO FACE OF EXISTING FINISH OR FACE OF NEW STUD, UNLESS NOTED OTHERWISE.
- 2. ALL NEW WALLS TO RECEIVE SAME WALL TEXTURE AS EXISTING WALLS.

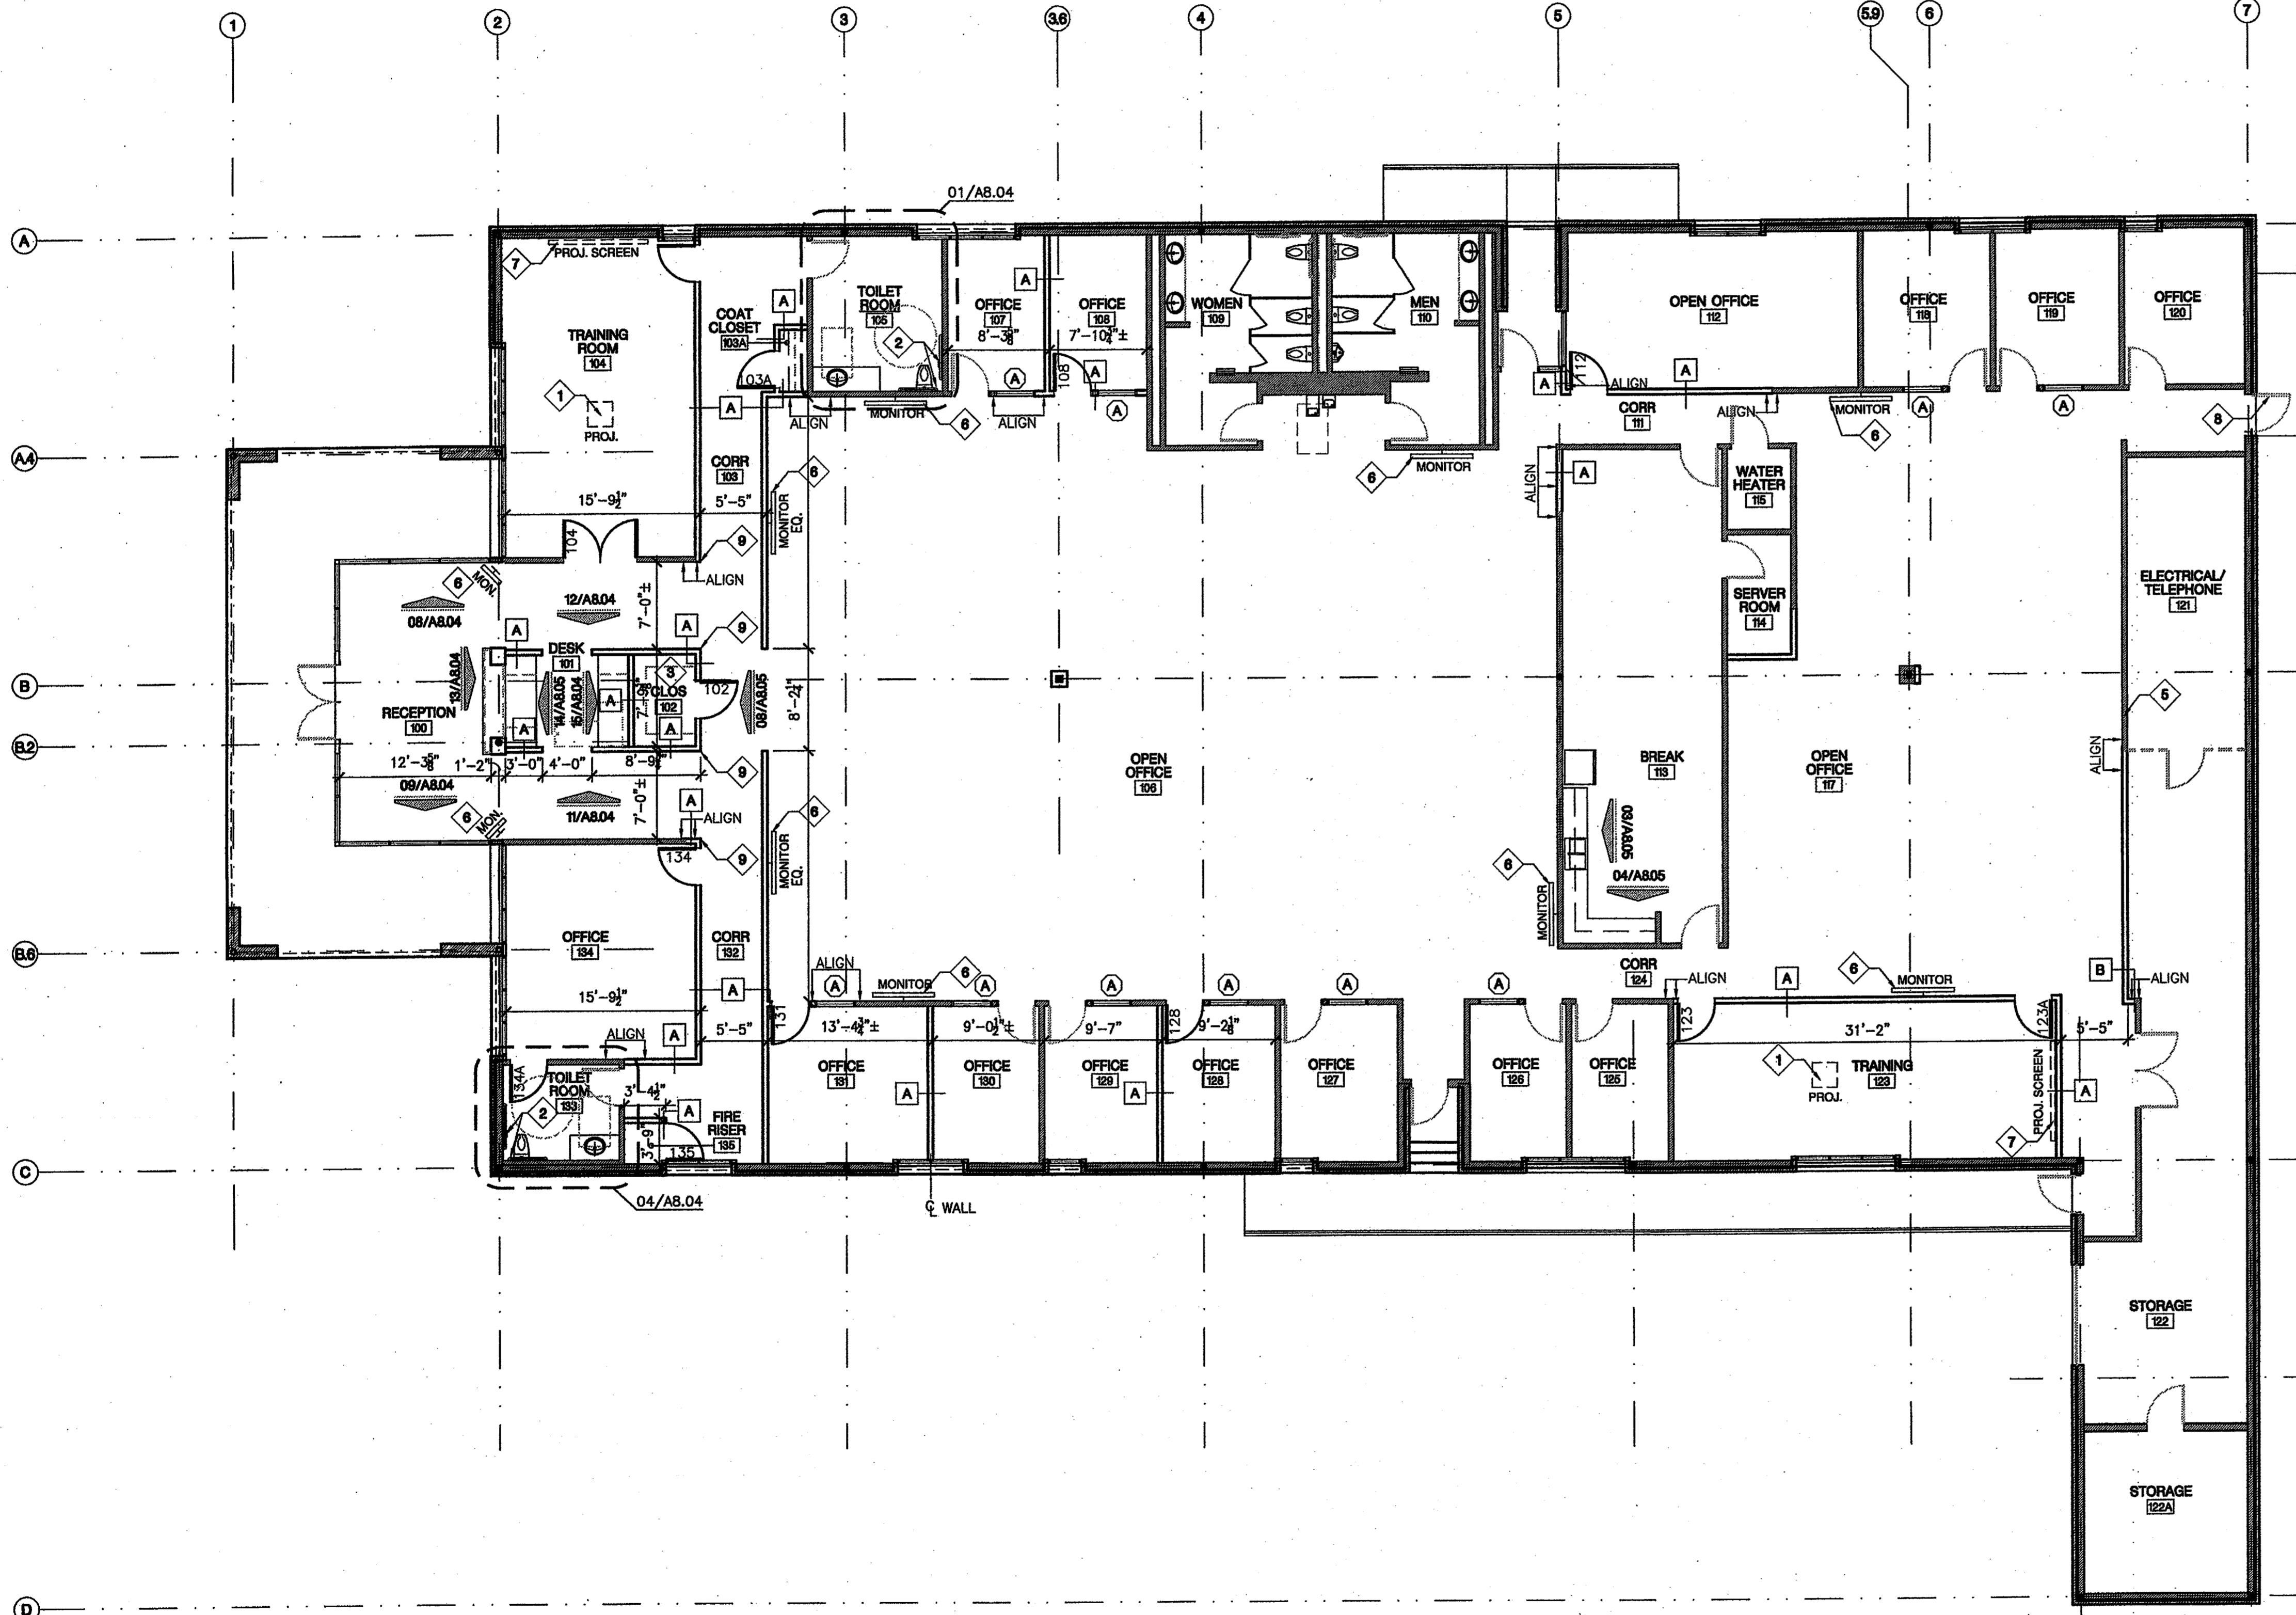

01 CONSTRUCTION PLAN
SCALE: 1/8" = 1'-0"

