
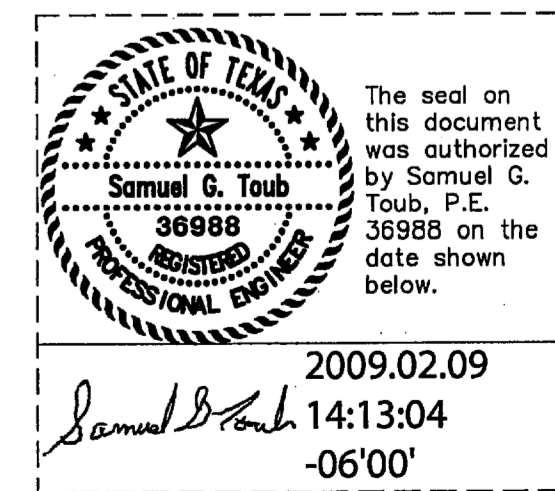


**NOTES BY SYMBOL:**

- ① SMOKE DETECTOR LOCATED IN SUPPLY AND RETURN AIR STREAM. INTEGRATE INTO THE THERMOSTAT CONTROL CIRCUIT SO THAT WHEN ACTIVATED THE UNIT IS DE-ENERGIZED.
- ② EXISTING ROOFTOP UNIT TO BE RELOCATED AND RE-USED. CONTRACTOR SHALL CLEAN AND COMB CONDENSER COIL; CLEAN EVAPORATOR COIL AIR FILTER; VERIFY PROPER OPERATION OF ALL CONTROLS AND SAFETY; VERIFY UNIT PERFORMANCE IN COOLING AND HEATING CYCLES; INSPECT HEAT EXCHANGER FOR CRACKS OR DAMAGE.
- ③ PROVIDE GAS PIPE SUPPORTS EVERY 6 FT. ON ALL GAS BRANCHES, EVERY 10 FT. ON GAS MAIN, EVERY JOINT CONNECTION FROM BRANCH TO GAS MAIN. REFER TO DETAIL 02/PS.01 FOR ROF PIPE SUPPORT.
- ④ ROUTE 1 1/2\"/>

**01 ROOF PLAN - MECHANICAL**

SCALE: 1/8"=1'-0"

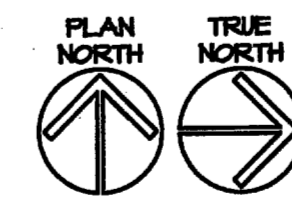

Project # 2988  
**S. Toub & Associates Inc.**  
 Consulting Engineer Mechanical / Electrical  
 13941 Omega Road, Dallas, Texas 75244  
 972/386-5829  
 © COPYRIGHT 2009

**JANI KING CALL CENTER**  
**4393 SUNBELT DRIVE**  
 ADDISON, TEXAS

PROJECT NUMBER: 20090205  
 SHEET NUMBER: FLOOR PLAN MECHANICAL  
 DATE: FEBRUARY 9, 2009  
 M2.02