

VITRUVIAN WAY UNDER SEPARATE CONTRACT

PARK ROAD UNDER SEPARATE CONTRACT

PONTE AVENUE UNDER SEPARATE CONTRACT

VP101

BROOKTOWN TOWNHOUSES


WOODED CREEK ESTATES

FARMERS BRANCH CREEK

SOUTH PEDESTRIAN BRIDGE

SOUTHEAST RAMP

5'X5'X6" CONCRETE EQUIPMENT SLAB WITH 2" DEEP PERIMETER BEAM SEE DETAIL ON SHEET C601

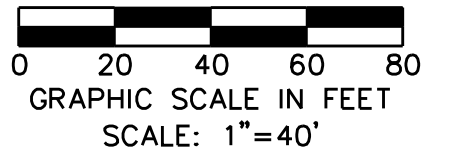

LEGEND

- STANDARD DUTY PAVEMENT:**
 6" (4200 PSI AT 28 DAYS) CONCRETE PAVT. W/ #3 BARS @ 18" O.C.E.W. ON 6" COMPACTED SUBGRADE TO 95% AT OR ABOVE OPTIMUM MOISTURE CONTENT (ASTM D 698). REFERENCE LANDSCAPE PLANS.
- MISCELLANEOUS & FLATWORK:**
 4" REINFORCED CONCRETE FLATWORK (3000 PSI AT 28 DAYS) W/ #3 BARS @ 18" O.C.E.W. ON 6" COMPACTED SUBGRADE TO 95% AT OR ABOVE OPTIMUM MOISTURE CONTENT (ASTM D 698). REFERENCE LANDSCAPE PLANS.
- RETAINING WALL:**

PAVING NOTES

- REFER TO SHEET C604 FOR "GENERAL PAVING NOTES" FOR

WARNING

CONTRACTOR IS TO CONTACT TEXAS ONE-CALL SYSTEM (1-800-245-4545) OR OTHER UTILITY LOCATING SERVICES AT LEAST 48 HOURS PRIOR TO CONSTRUCTION ACTIVITIES. ICON CONSULTING ENGINEERS, INC. IS NOT RESPONSIBLE FOR KNOWING ALL EXISTING UTILITIES IN THE PROJECT AREA NOR FOR DEPICTING THE EXACT LOCATIONS OF UTILITIES ON THESE DRAWINGS.

BM #1 REF. ELEVATION = 559.47
 SQUARE CUT IN TOP OF CURB, SOUTH MEDIAN
 END NOSE, MARSH LANE
 1127' NORTH OF VITRUVIAN WAY.

BM #2 REF. ELEVATION = 547.84
 SQUARE CUT IN TOP OF CURB, NORTH MEDIAN
 END NOSE, AT INTERSECTION OF
 VITRUVIAN WAY AND MARSH LANE.



NO.	REVISION	BY	DATE
TOWN OF ADDISON DALLAS COUNTY, TEXAS PARK AND STREETSCAPE IMPROVEMENTS VITRUVIAN PARK PAVING PLAN SOUTH			
icon Consulting Engineers, Inc. Civil Engineers - Designers - Planners		250 W. Southlake Blvd., Suite 117 Southlake, Tx 76092 (817) 552-6210	
PROJECT	DESIGN	DRAWN	DATE
5029-01	ICE	ICE	APR 26, 2010
FILE	SHEET		
PW# 2009-04	C602		

PARK AND STREETSCAPE IMPROVEMENTS - VITRUVIAN PARK