


ELEVATION
SCALE: 3/16" = 1'-0"

ESTIMATED QUANTITIES

| Item | Unit | Quantity |
|---|------|----------|
| Two Steel Archs | LB | 138,900 |
| Four Embed Anchors | LB | 35,240 |
| Nine Hangers (2" Dia. Rod w/ #5 Clevis) | LB | 4,632 |
| Total | LB | 178,772 |

Notes:
Slide bearings are subsidiary to embed anchors.
Hanger quantity includes deck embed.

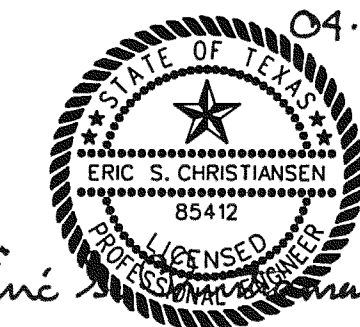

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY ERIC S. CHRISTIANSEN, P.E. #85412 ON 04-29-2010. ALTERATION OF A SEALED DOCUMENT WITHOUT PROPER NOTIFICATION TO THE RESPONSIBLE ENGINEER IS AN OFFENSE UNDER THE TEXAS ENGINEERING PRACTICE ACT. THE RECORD COPY OF THIS DRAWING IS ON FILE AT THE OFFICES OF HALFF ASSOCIATES, 1201 NORTH BOWSER ROAD, RICHARDSON, TEXAS, 75081. TYPE FIRM #F-312.

| NO. | REVISION | BY | DATE |
|--|----------|-------|------------|
| TOWN OF ADDISON DALLAS COUNTY, TEXAS VITRUVIAN PARK BRIDGES PONTE AVENUE ARCH DETAILS - ELEVATION | | | |
| HALFF 1201 NORTH BOWSER ROAD, RICHARDSON, TEXAS 75081-2275 TEL (214) 346-6200 FAX (214) 739-0065 | | | |
| PROJECT | DESIGN | DRAWN | DATE |
| 27379 | ESC | AHH | APRIL 2010 |
| FILE | SHEET | | |
| - | S1-19 | | |