
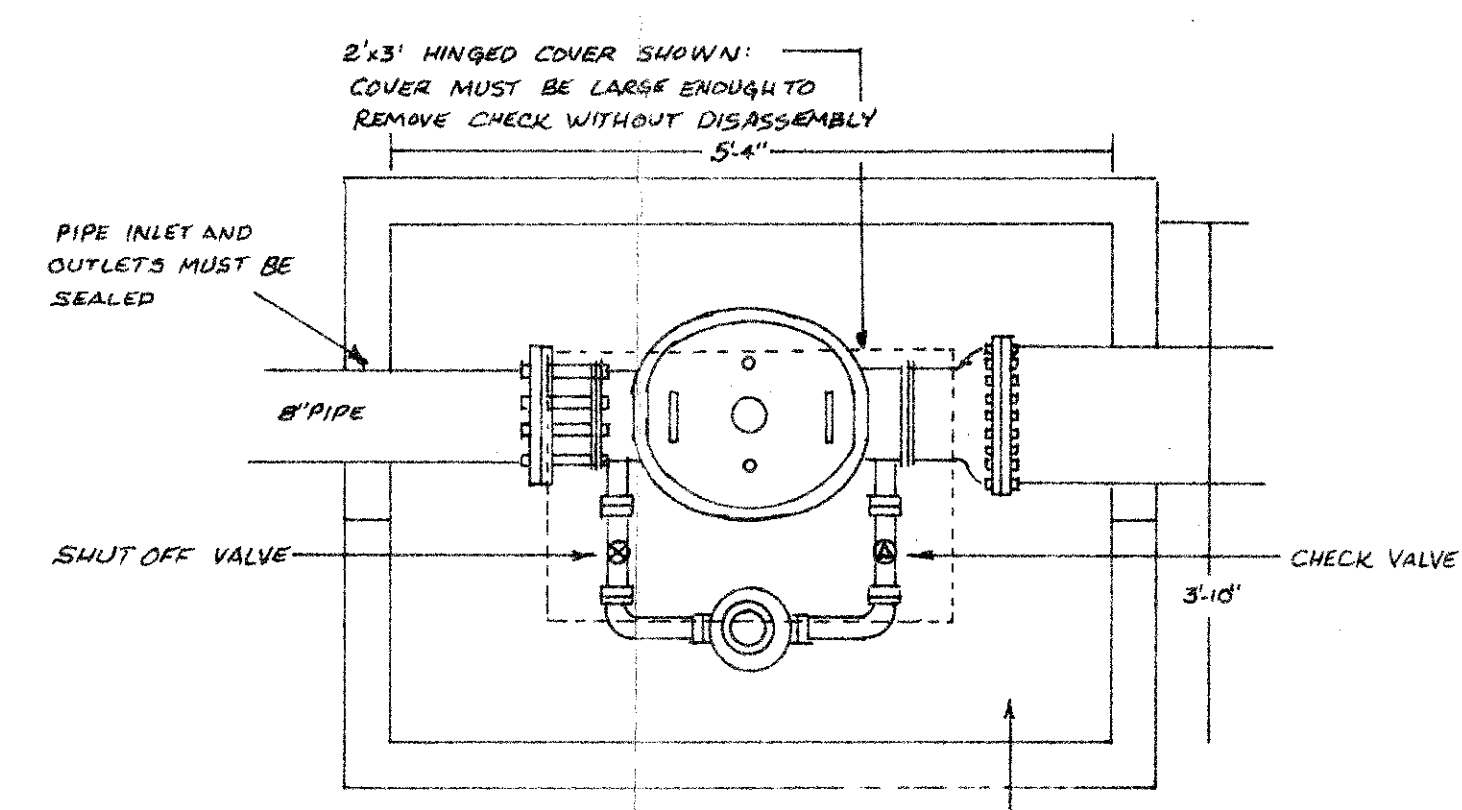


H-218  
B12-4

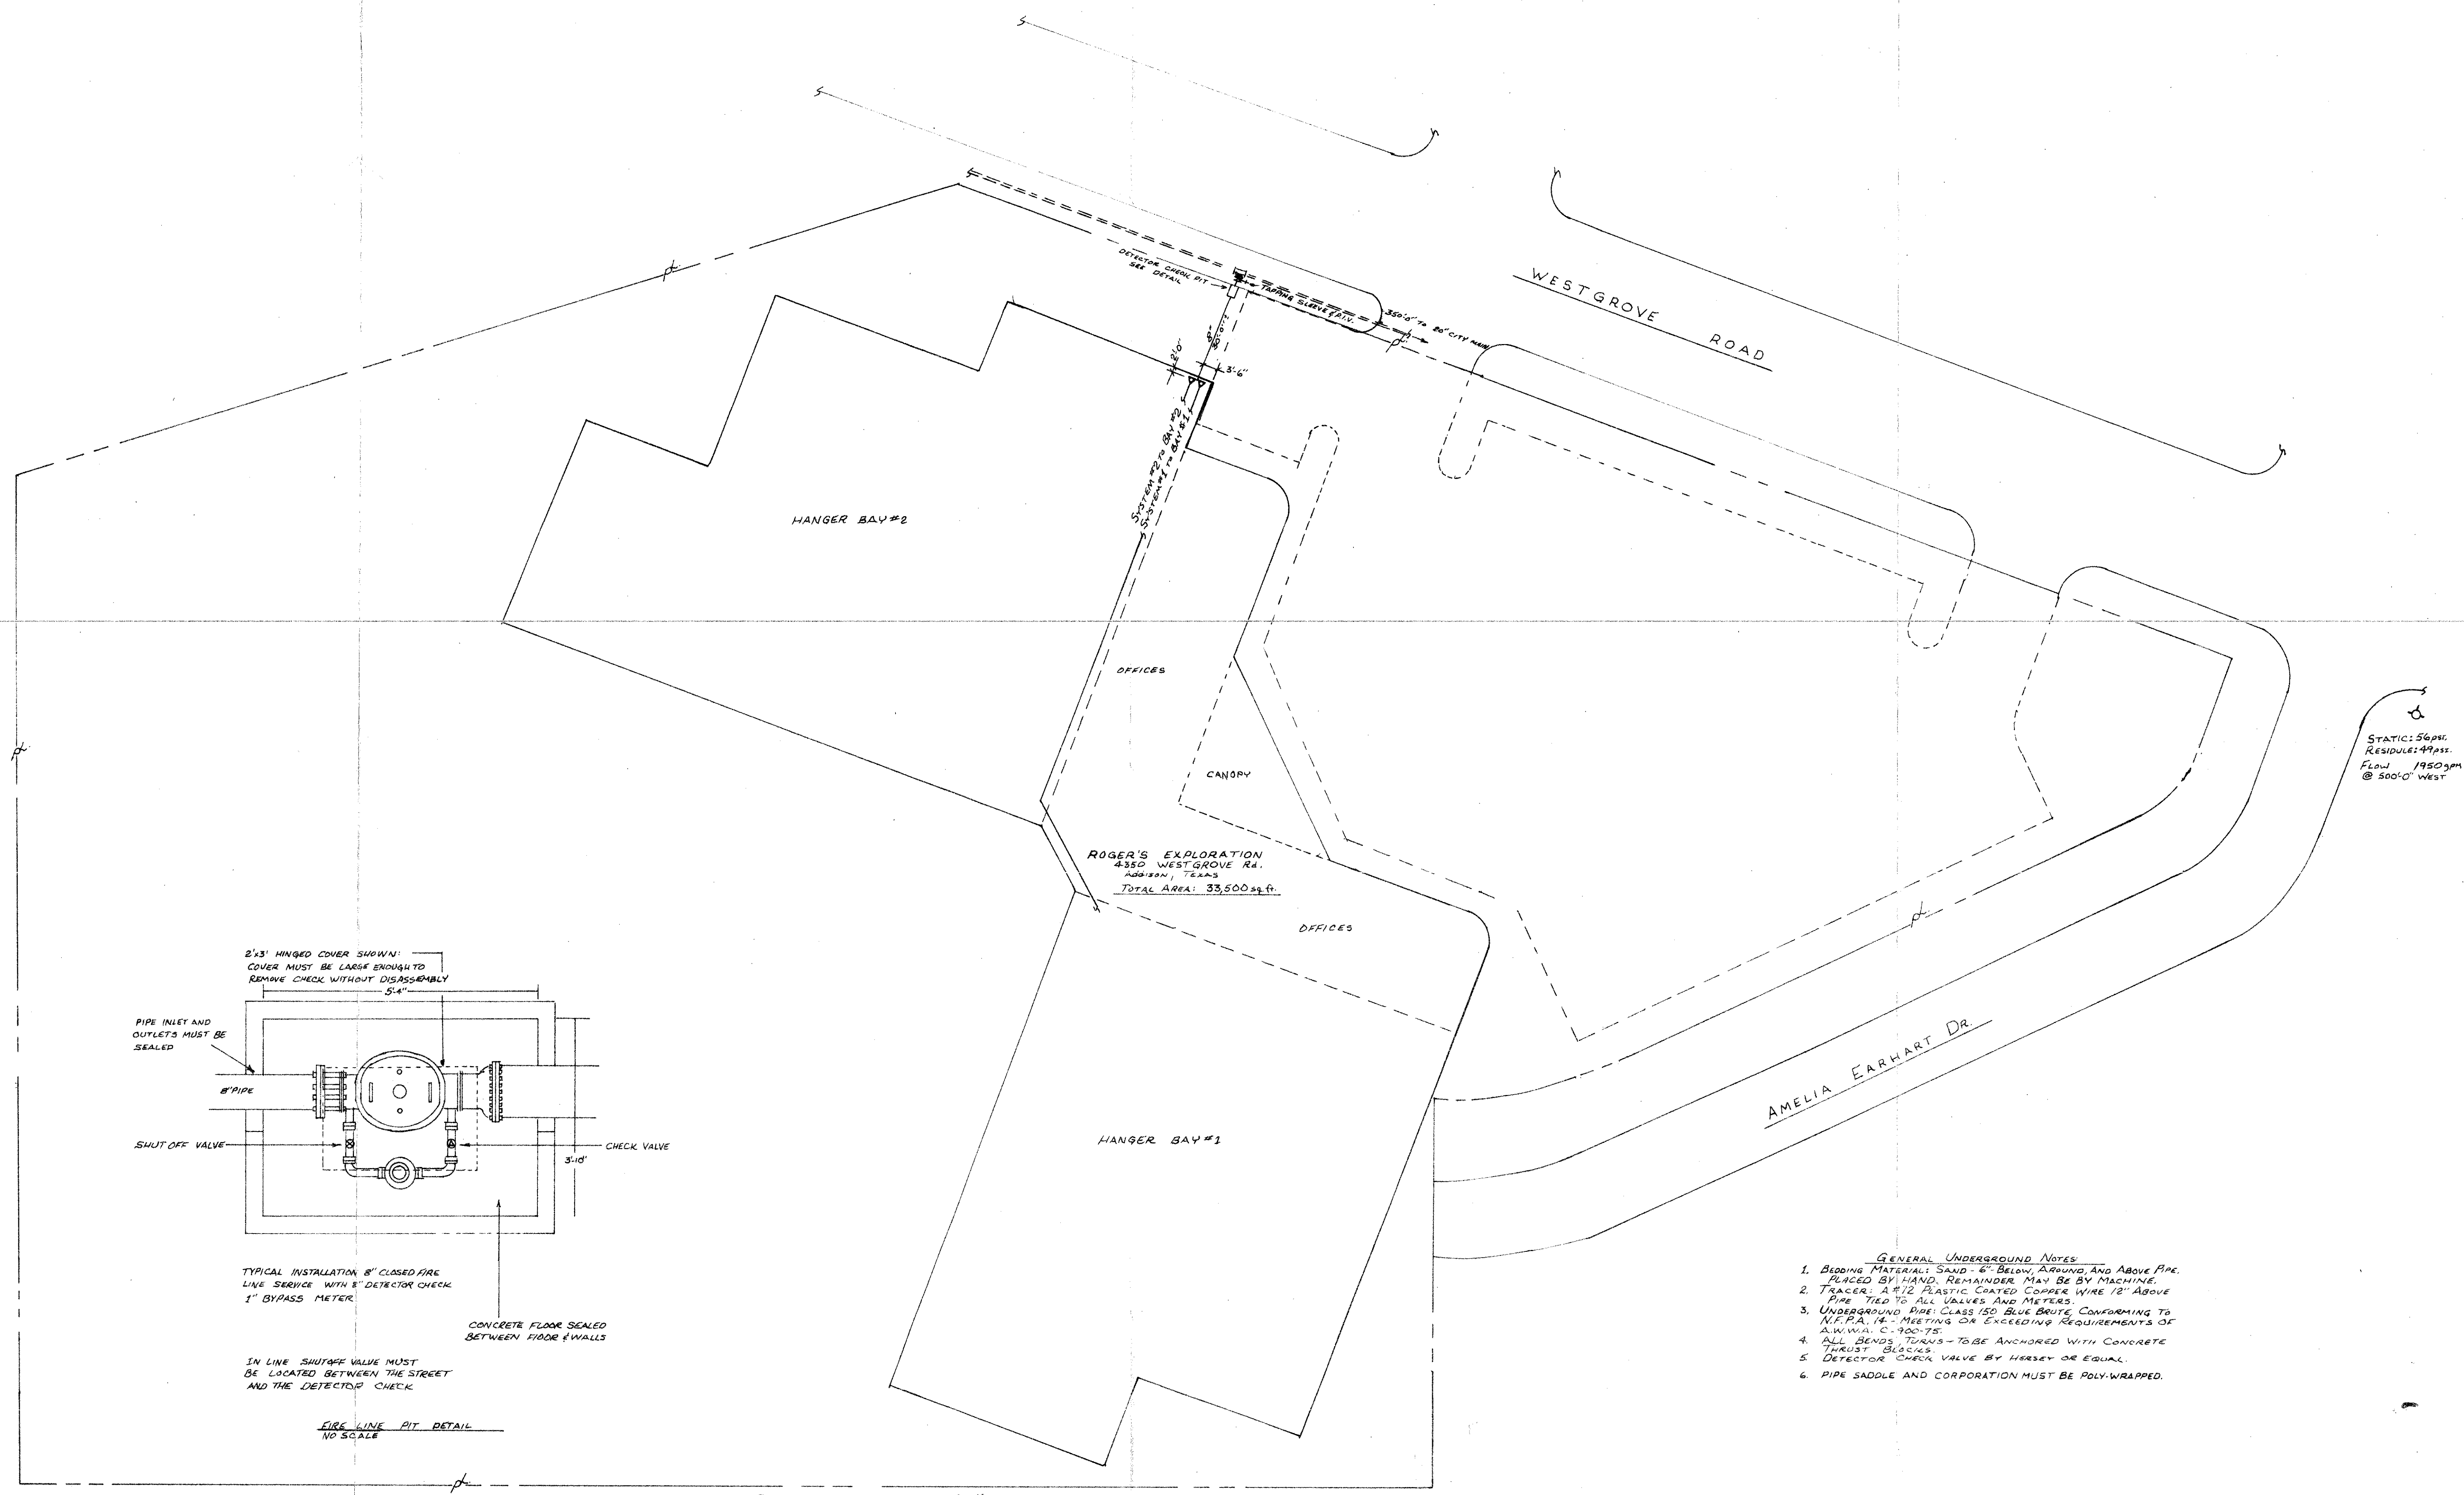

TYPICAL INSTALLATION 8" CLOSED FIRE  
LINE SERVICE WITH 8" DETECTOR CHECK  
1" BYPASS METER

IN LINE SHUT OFF VALVE MUST  
BE LOCATED BETWEEN THE STREET  
AND THE DETECTOR CHECK

FIRE LINE PIT DETAIL  
NO SCALE

PLOT PLAN 1"=20'-0"

- GENERAL UNDERGROUND NOTES
1. BEDDING MATERIAL: SAND - 6" BELOW, AROUND AND ABOVE PIPE. PLACED BY HAND, REMAINDER MAY BE BY MACHINE.
  2. TRACER: A #12 PLASTIC COATED COPPER WIRE 18" ABOVE PIPE TIED TO ALL VALVES AND METERS.
  3. UNDERGROUND PIPE CLASS ISO BLUE BRUTE CONFORMING TO N.F.P.A. 18 - MEETING OR EXCEEDING REQUIREMENTS OF ANNUAL 2-2007E.
  4. ALL BENDS, TURNS - TO BE ANCHORED WITH CONCRETE TRUST BLOCKS.
  5. DETECTOR CHECK VALVE BY HERSEY OR EQUAL.
  6. PIPE SADDLE AND CORPORATION MUST BE POLY-WRAPPED.

CITY OF ADDISON  
APPROVED  
FOR CONSTRUCTION  
BUILDING DEPARTMENT  
DATE: 9-6-87

NOTE: CONTRACTOR IS HEREBY INSTRUCTED TO EXERCISE CARE IN MEETING OR EXCEEDING ALL REQUIREMENTS OF BOTH NATIONAL AND LOCAL CODES AND FOR ORDINANCES APPLICABLE TO HIS WORK. APPROVAL OF THESE DRAWINGS SHALL NOT BE CONSTRUED TO RELIEVE RESPONSIBILITY OF MAKING VARIANCE TO SUCH CODES.

INSUR. AUTH. FACTORY MUTUAL	FILE NO.	
DRAWN BY D. GREEN/A.S. ON SHT. B	SHEET # 1 OF 3	
CHECKED BY A.S. ON JOB	DATE 9-7-83	
CONT. NO. 83-414	AREA 33,500	SCALE 1"=20'-0"
TYPE OF OCCUPANCY OAD. HAZ. GC. II		

PAINTING	
VALVE PIT	
HEAT	
ELECTRICAL	
AIR SUPPLY	
VALVE HOUSE	
DRAFT CURTAIN	
CITY CONNECTION	

DATE	BY	REVISIONS

M.B.C. TO PROVIDE  
OTHERS TO PROVIDE

MUTUAL SERVICE CORPORATION  
BOX 18536  
DALLAS, TEXAS 75218

AUTOMATIC SPRINKLER EQUIPMENT FOR  
ROGERS HANGERS  
4380 WEST GROVE RD.  
4380 ADDISON AIRPORT  
ADDISON, TEXAS