


8" CMU & 2" GAP W/ 4" FUR WALL S: 1"=1'-0"

DOOR SCHEDULE


TYPE	QT	DESCRIPTION	NOTES
D1	2	MAIN ENTRY, 6' W X 8' H W/ 3X7 GLASS DOOR	DOOR CLOSER, PANIC HARDWARE, AND LOCK
D2	6	6'-0"W X 7'H W/ 2-3'X7' STEEL 90MIN	DOOR CLOSER & PANIC HARDWARE
D3	1	3'X7' SOLID CORE STEEL REDI FRAME 90MIN	DOOR CLOSER & PANIC HARDWARE
D4	1	3'X7' FRAME, 90 MIN SOLID WOOD	DOOR CLOSER & PANIC HARDWARE
D5	1	10'X10' STEEL INSULATED ROLL UP DOOR	ON MOTOR & CHAIN

ROOM FINISH

ROOM	FLOOR	WALL	CEILING
LOBBY AREA	STAIN CONCRETE	LATEX PAINT, SEMI GLOSS & GLASS WALL	2X2 GRID CEILING @ 18' AFF
SERVICE/HALLWAY	STAIN CONCRETE	LATEX PAINT, SEMI GLOSS & GLASS WALL	OPEN STRUCTURE
RESTROOMS	CERAMIC TILE	FULL HEIGHT CERAMIC TILE	2X2 VINYL COATED TILE @ 10'-0" AFF

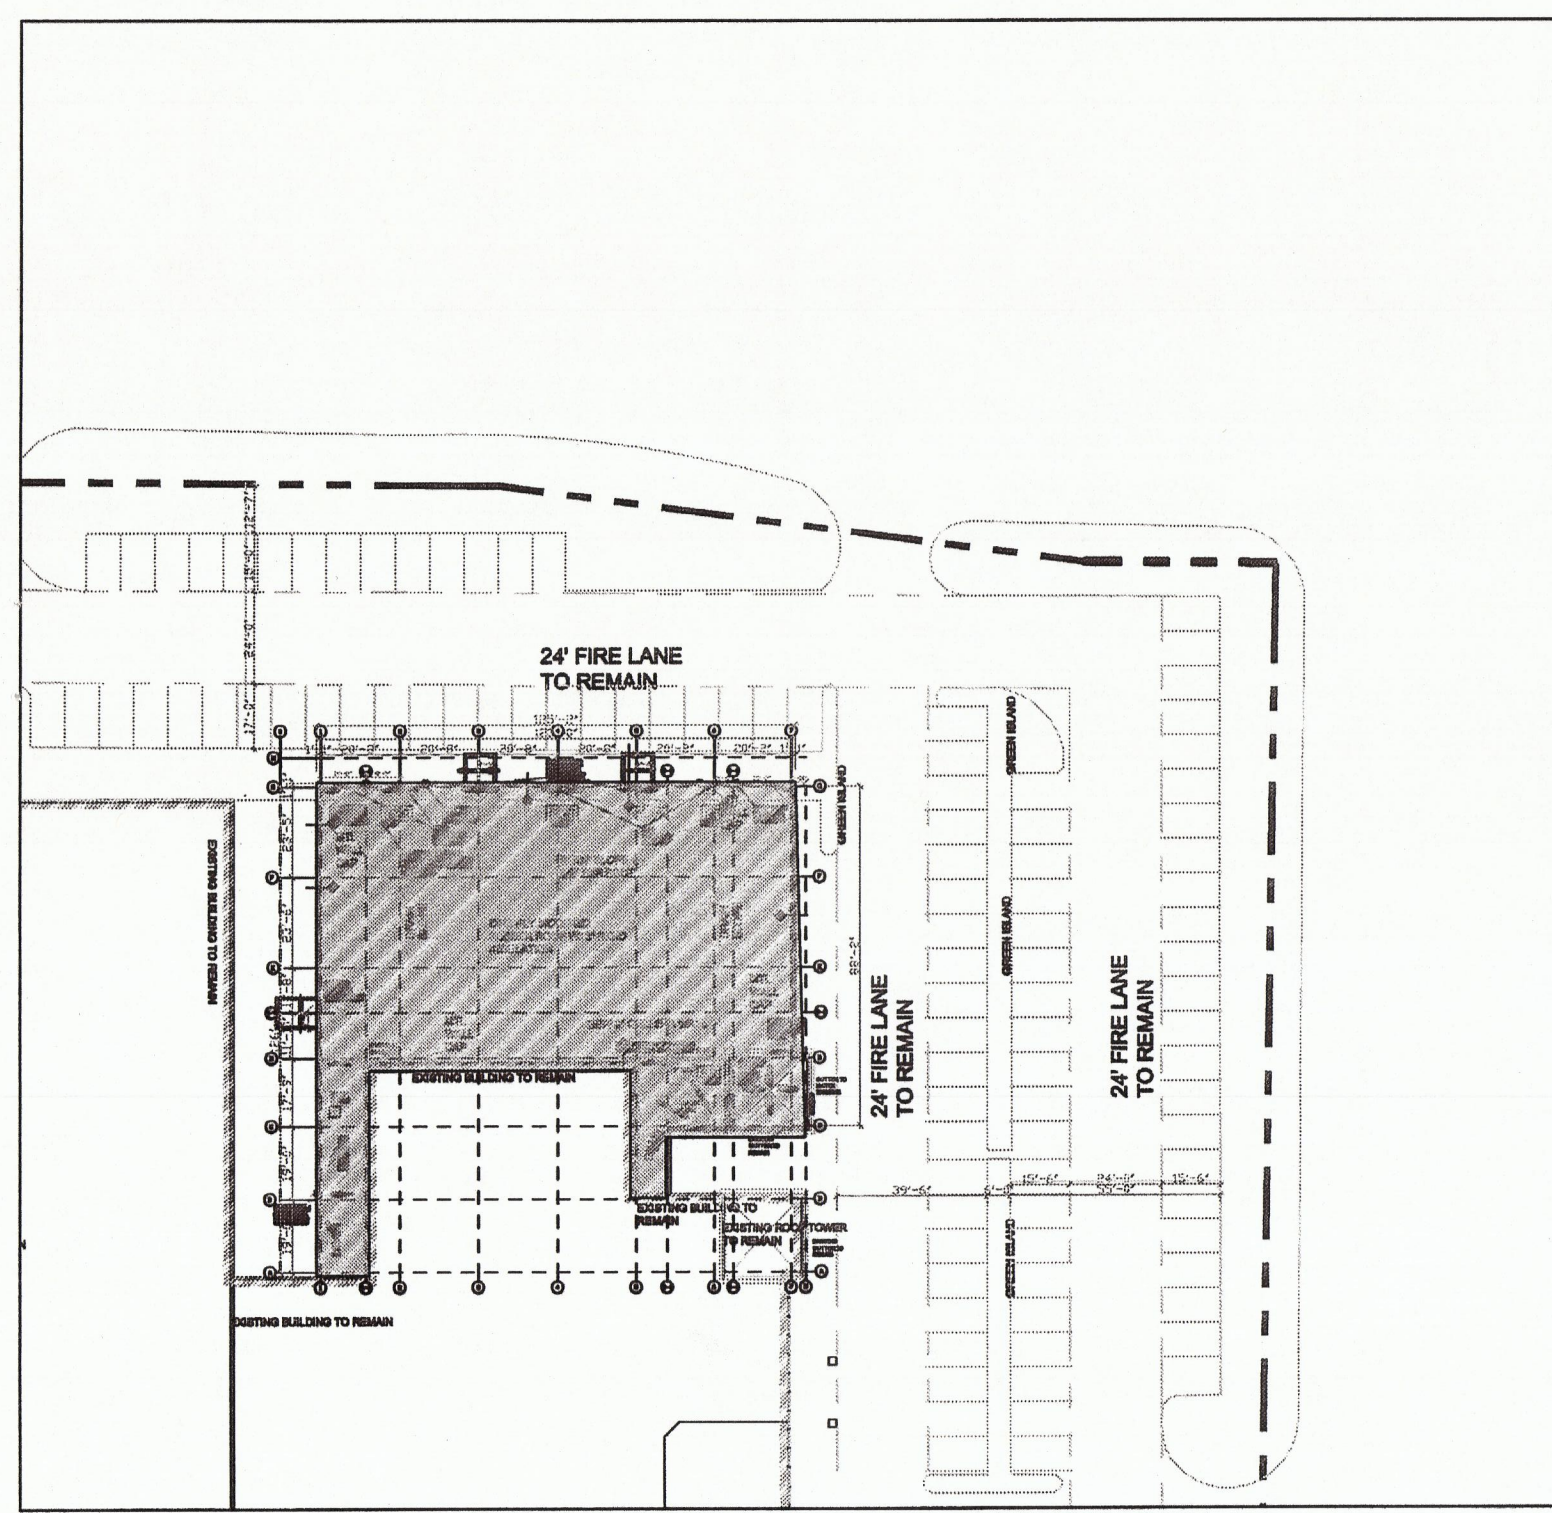

S: 1"=50'-0"

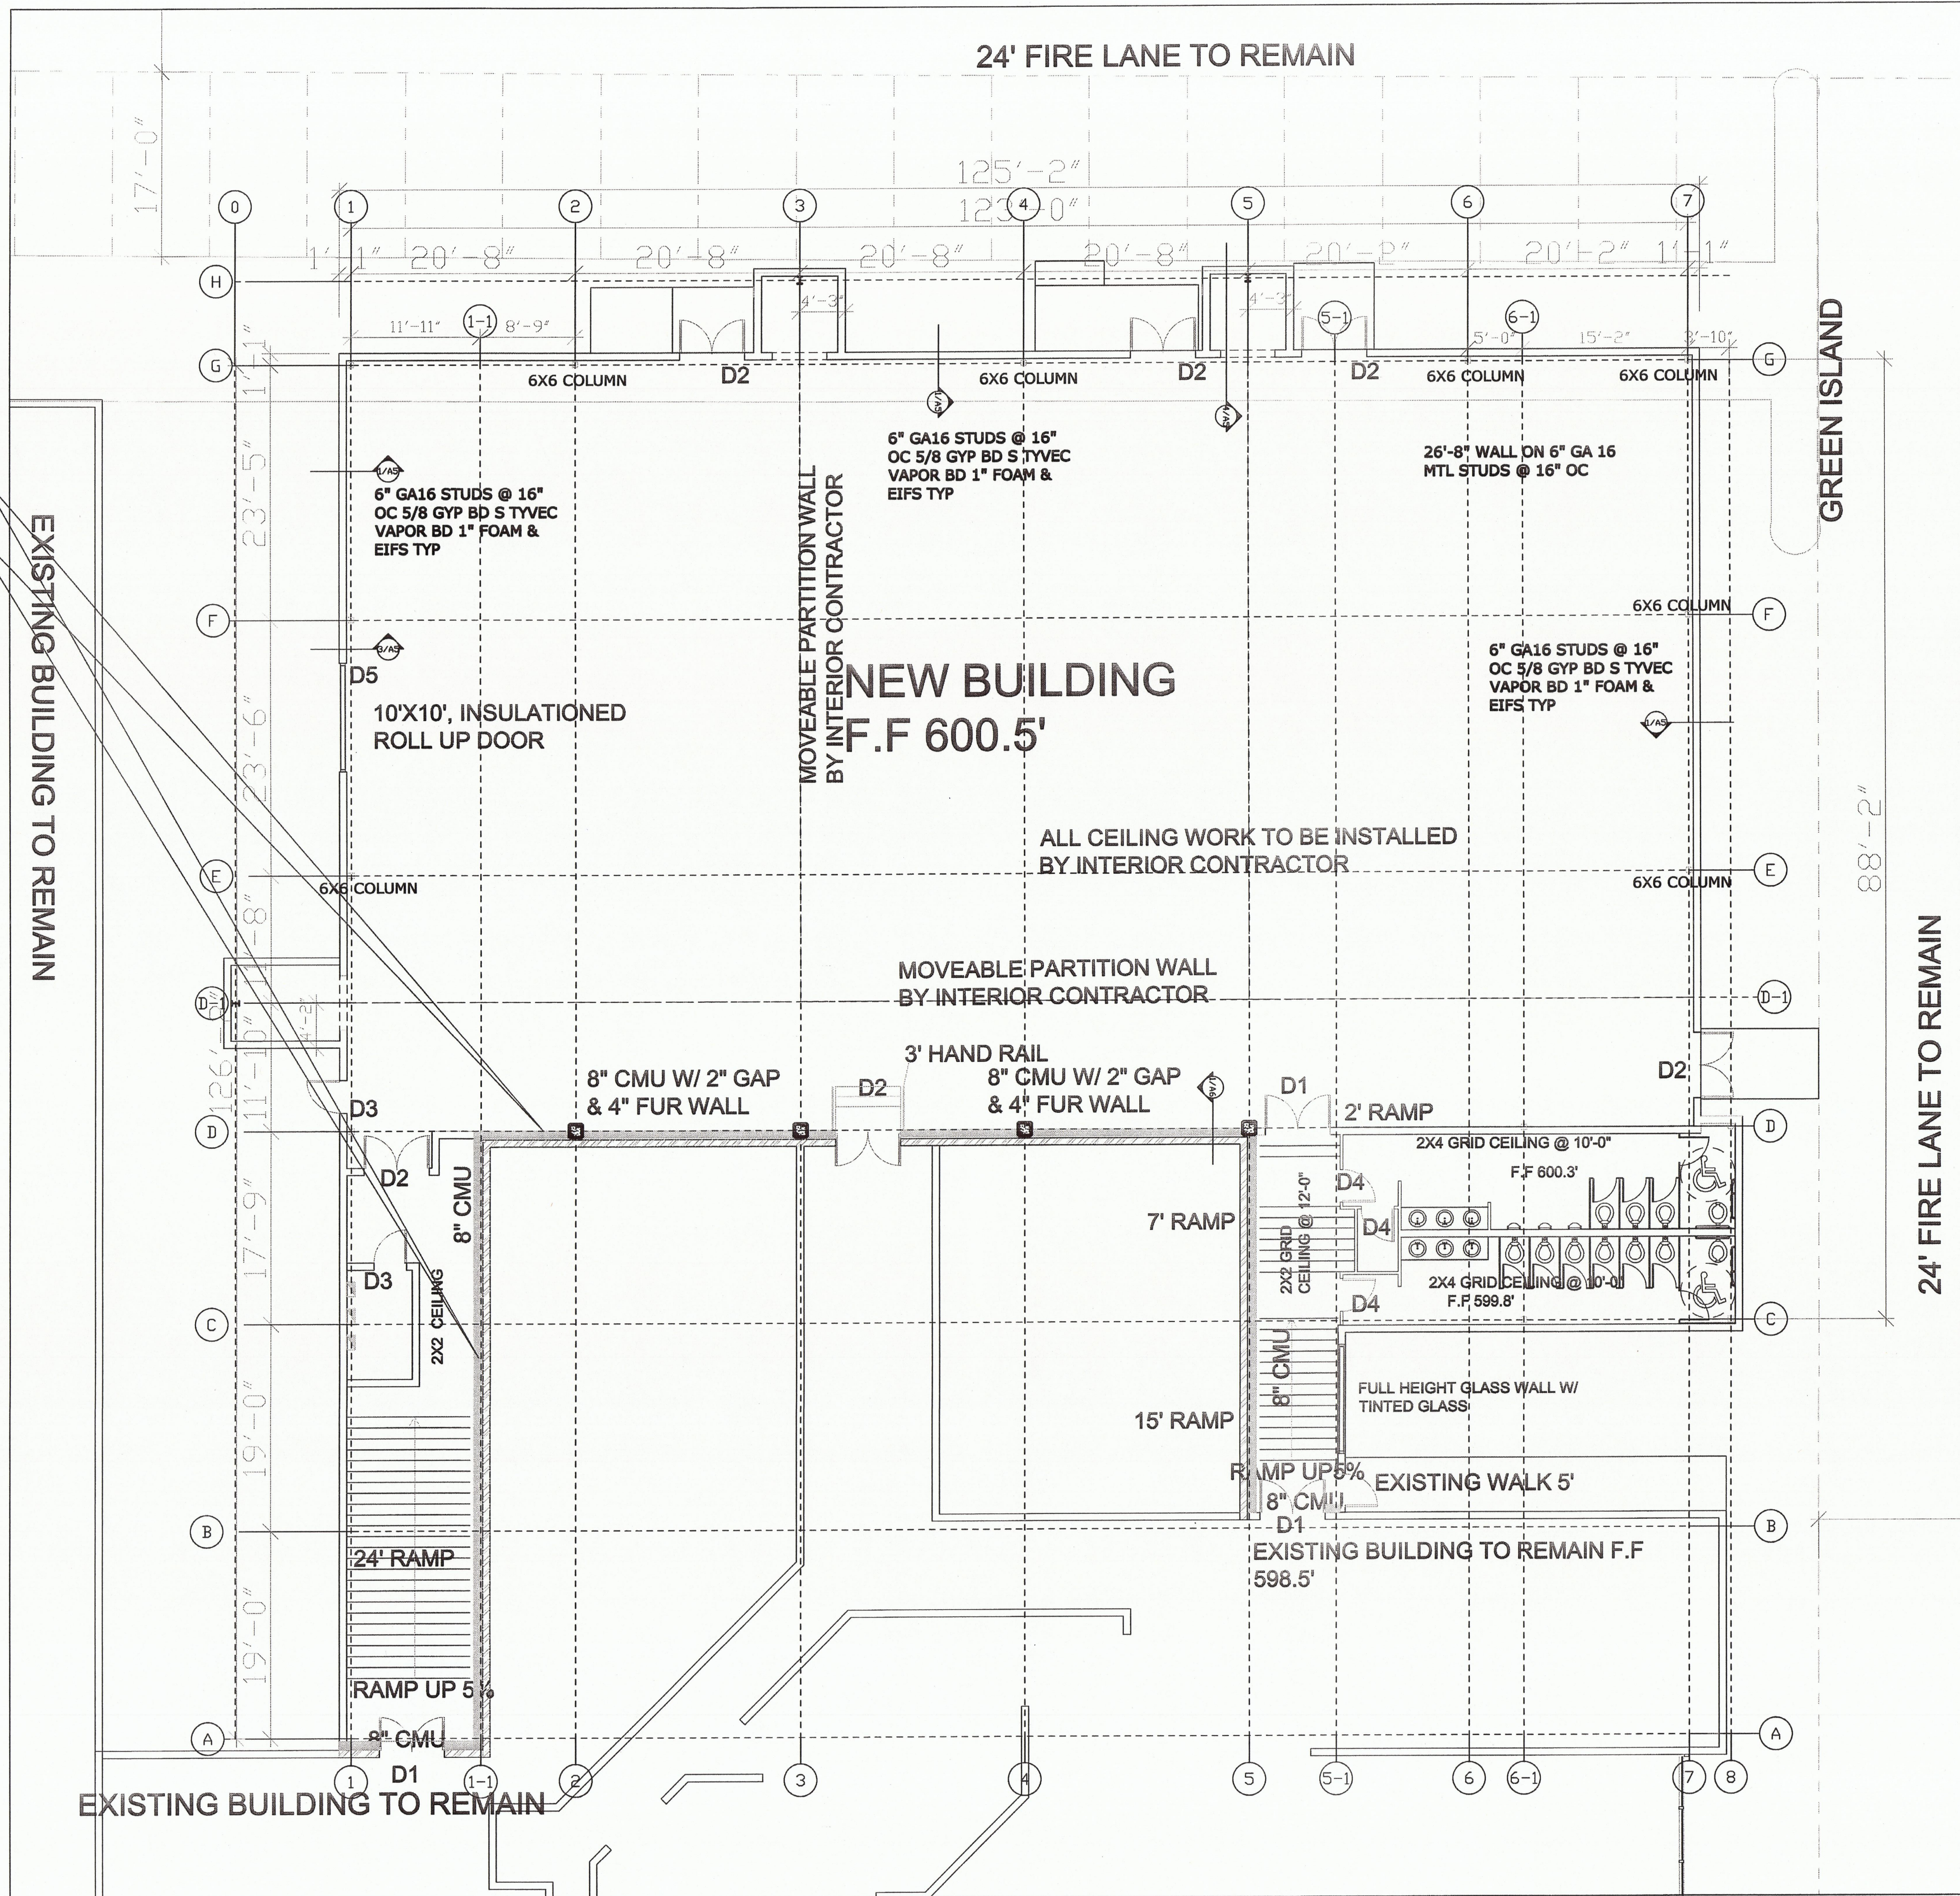

FLOOR PLAN S: 1/8"=1'-0"

CHAUCER'S
DESIGN STUDIO

949 SIMON DRIVE, PLANO, TX, 75025
TEL: 972.849.6848 E-MAIL: chaucerdesignbuil@gmail.com



CROWN PLAZA HOTEL

14315 MIDWAY
ADDISON, TEXAS 75001

REVISION:

DRAFTER:
CHEHSIANG CHEN
DATE:
3/01/2010

A1