

TEXAS EXCAVATION
SAFETY SERVICES
1-800-344-8377

0.76 ACRES
TO BE DISTURBED

EROSION CONTROL NOTES

1. THIS PLAN HAS BEEN PREPARED TO PROVIDE MEANS TO PREVENT OR MINIMIZE POLLUTION OF STORM WATER.
2. BEST MANAGEMENT PRACTICES (STRUCTURAL PRACTICES) USED IN THIS PROJECT COULD INCLUDE SILT FENCING, CONSTRUCTION ENTRANCE, INLET PROTECTION, OUTLET PROTECTION, SUBSURFACE DRAINS, CHECK DAMS, DRAINAGE SWELLS, SEDIMENT TRAPS, EARTH DIKE, PIPE SLOPE DRAINS, EROSION CONTROL MATTING, DETENTION/RETENTION PONDS AND SEDIMENT BASINS AND ANY OTHER MEANS NECESSARY TO PREVENT POLLUTION.
3. INSPECTION OF EROSION CONTROLS TO BE PERFORMED ONCE A WEEK AND WITHIN 24 HOURS OF RAINFALL EVENTS OF 0.5 INCHES OR GREATER. IF REPAIR IS NECESSARY, IT SHALL BE DONE AT EARLIEST PRACTICAL DATE BUT IN EACH CASE NOT GREATER THAN 48 HOURS.
4. MAINTENANCE OF EROSION CONTROLS TO BE PERFORMED AS SPECIFIED IN DETAILS.
5. THE CONTRACTOR SHALL REMOVE ALL EXCESS SOIL FROM CONSTRUCTION VEHICLES PRIOR TO EXITING SITE.
6. ALL MATERIALS SPILLED, DROPPED, WASHED, OR TRACKED FROM VEHICLES ONTO ROADWAYS OR INTO STORM DRAINS MUST BE REMOVED IMMEDIATELY.
7. ALL DISTURBED AREAS WHICH WILL NOT BE RE-DISTURBED FOR A MINIMUM OF 14 DAYS MUST BE STABILIZED BY THE CONTRACTOR TO CONTROL EROSION.
8. THE CONTRACTOR SHALL UNDERTAKE PROPER METHODS TO REDUCE DUST GENERATION FROM SITE.
9. IF SOIL STOCKPILING IS EMPLOYED ON THE SITE, SILT FENCING SHALL BE USED TO HELP CONTAIN THE SEDIMENT.
10. TOPS OF STOCKPILES SHALL BE COVERED IN SUCH A MANNER THAT STORM WATER DOES NOT INFILTRATE THE MATERIALS AND THEREBY RENDERING THEM UNSUITABLE FOR FILL USE.
11. NO TRASH, GARBAGE, OR OTHER MATERIALS SHALL BE DISCHARGED INTO DRAINAGE DITCHES OR WATERS OF THE STATE.
12. ALL WASTE WATER SHALL BE DISPOSED OF IN A MANNER THAT PREVENTS CONTACT BETWEEN THESE MATERIALS AND STORM WATER THAT IS DISCHARGED FROM THE SITE.
13. ALL TEMPORARY EROSION AND SEDIMENT CONTROL MEASURES SHALL BE REMOVED WITHIN 30 DAYS AFTER FINAL STABILIZATION. FINAL STABILIZATION IS DEFINED AS A UNIFORM PERENNIAL VEGETATIVE COVER AT A MINIMUM OF 70% RESTORATION OF THE NATIVE OR NATURAL PRE-EXISTING BACKGROUND COVER FOR THE AREA.
14. SEDIMENTATION PONDS/ BASINS MUST BE CLEANED OUT WHEN SEDIMENTATION ACCUMULATES 50% BY VOLUME. LOCAL ORDINANCES AND REGULATIONS REGARDING HEALTH AND SAFETY MUST BE ADHERED TO.
15. SILT FENCES SHALL BE REPAIRED TO THEIR ORIGINAL CONDITIONS IF DAMAGED. SEDIMENT SHALL BE REMOVED FROM THE SILT FENCES WHEN IT REACHES ONE-THIRD TO ONE-HALF THE HEIGHT OF THE SILT FENCE.
16. INLET PROTECTION SHALL BE PLACED AROUND ALL CATCH BASINS AND CURB INLETS AS REQUIRED DURING CONSTRUCTION.
17. ALL PROPOSED SLOPES STEEPER THAN 3H: 1V SHALL BE STABILIZED AND PROTECTED FROM EROSION WITH EROSION CONTROL MATTING.
18. ALL CONSTRUCTION SHALL MEET OR EXCEED THE STATE AND LOCAL MUNICIPAL REQUIREMENTS AND SPECIFICATIONS.
19. NOTIFY THE NATIONAL RESPONSE CENTER (800) 424-8802 OR (202) 426-2675 AS SOON AS YOU HAVE KNOWLEDGE OF THE SPILL.
20. ALL DISTURBED AREAS SHALL BE SODDED IMMEDIATELY FOLLOWING FINAL GRADING.

LEGEND

- INLET PROTECTION
SEE DETAIL SHEET 6.1
- DOUBLE SILT FENCE
SEE DETAIL SHEET 6.1
- TRIANGULAR SEDIMENT FILTER DIKE
SEE DETAIL SHEET 6.1

BENCHMARK

"1" SQUARE CUT ON CURB RETURN, WEST SIDE OF
MONFORT & SAKOWITZ, NE CORNER.
ELEV=608.63


DATE	BY	REVISIONS

LARRY BLILIE P.E.
OLSON LAND DEVELOPMENT SERVICES
989 CR. 108
WHITESBORO, TX 76273
PH. 940.595.0528

CONTACT: NATHAN OLSON

LOT 1B, MILLIKEN ADDITION
VICTOR MEYERS CUSTOM HOMES, LLC
(OWNER LOT 1B) MICHAEL & RACHEL HARDIN

EROSION CONTROL
PLAN

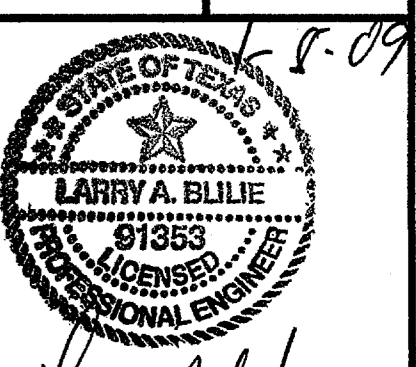

PROJECT MANAGER
NJO
PROJECT TECHNICIAN
NJO
JOB NUMBER
120-10981-000
SHEET NUMBER