



EROSION CONTROL NOTES

1. ALL CONTRACTORS WILL COMPLY WITH THE REQUIREMENTS AND INTENT OF THE NPDES GENERAL PERMIT FOR STORM WATER DISCHARGES.
2. EACH CONTRACTOR SHALL SUBMIT A NOTICE OF INTENT (NOI) FOR STORM WATER DISCHARGE PERMIT COVERAGE. THIS SUBMITTAL SHALL BE COORDINATED WITH THE ENGINEER AND SHALL OCCUR NO LESS THAN 48 HOURS PRIOR TO THE COMMENCEMENT OF ANY CONSTRUCTION ACTIVITY.
3. EACH CONTRACTOR SHALL OBTAIN AND SUBMIT TO OWNER/ENGINEER A POLLUTION PREVENTION CERTIFICATION FROM EACH SUB-CONTRACTOR WHOSE WORK IMPACTS THE STORM WATER POLLUTION PREVENTION PLAN (SWPPP) PRIOR TO THE PERFORMANCE OF ANY WORK BY SAID SUB-CONTRACTOR. THESE CERTIFICATIONS SHALL BECOME A PART OF THE STORM WATER POLLUTION PREVENTION PLAN.
4. CONTRACTOR SHALL INSTALL EROSION CONTROL MEASURES, AS INDICATED ON THE PLANS AND AS FIELD CONDITIONS WARRANT, PRIOR TO COMMENCING ANY CONSTRUCTION ACTIVITY. REPAIRS OR MODIFICATIONS TO THE MEASURES WILL BE MADE BY THE CONTRACTOR IF THE CONTROL MEASURES PROVE INEFFECTIVE OR IF ADDITIONAL CONTROL MEASURES ARE NECESSARY.
5. AT A MINIMUM, PERIMETER CONTROLS SUCH AS SILT FENCE OR STRAW BALES SHALL BE INSTALLED AT ALL DOWN SLOPE BOUNDARIES AND AS WARRANTED WHERE PAVEMENT REMOVAL, UTILITY CONSTRUCTION, GRADING, OR OTHER CONSTRUCTION ACTIVITIES ARE TO BE PERFORMED. THE CONTRACTOR SHALL AT ALL TIMES TAKE SUCH MEASURES AS NECESSARY TO MINIMIZE OFF SITE TRACKING OR TRANSPORT OF SEDIMENT AND DEBRIS.
6. DAMAGES TO ADJACENT PROPERTY OR TO RECEIVING WATERS CAUSED BY IMPROPERLY INSTALLED OR POORLY MAINTAINED EROSION CONTROL MEASURES ARE THE RESPONSIBILITY OF THE CONTRACTOR.
7. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE REMOVAL AND DISPOSAL OF ANY SILTATION CAUSED BY HIS OPERATIONS AND/OR FAILURE OF THE EROSION CONTROL MEASURES.
8. CONTRACTOR SHALL REMOVE AND PROPERLY DISPOSE OF ACCUMULATED SILT AND SEDIMENT FROM EROSION CONTROL MEASURES WHEN IT REACHES A DEPTH OF SIX (6) INCHES OR IMPAIRS THE EFFECTIVENESS OF THE MEASURES.
9. THE OWNER'S REPRESENTATIVE WILL INSPECT THE PROJECT AT A MINIMUM OF EVERY SEVEN DAYS AND AFTER EVERY RAINFALL OF 0.5 INCHES OR GREATER TO DETERMINE THE INTEGRITY AND EFFECTIVENESS OF THE EROSION CONTROL MEASURES. A WRITTEN INSPECTION REPORT WILL BE FILED WITH THE POLLUTION PREVENTION PLAN. THIS INSPECTION DOES NOT RELIEVE THE CONTRACTOR'S RESPONSIBILITY FOR INSPECTION AND MAINTENANCE OF THE EROSION CONTROL MEASURES OR HIS DUTY TO COMPLY WITH THE INTENT AND CONDITIONS OF THE NPDES GENERAL PERMIT.
10. INLET PROTECTION: THE CONTRACTOR SHALL PROVIDE ADEQUATE PROTECTION OF STORM DRAIN INLETS USING STRAW BALE CHECKS OR OTHER MEASURES AS SPECIFIED. WHERE INLETS ARE BEING INSTALLED, THE CONTRACTOR SHALL PREVENT MATERIALS FROM ENTERING THE STORM DRAIN SYSTEM.
11. ALL STOCKPILED SOILS WILL BE SURROUNDED BY A STRAW BALE DIKE, SILT FENCE, SEDIMENT CONTROL SWALE, OR EQUIVALENT MEASURE, AS APPROVED BY ENGINEER, TO PROPERLY CONTROL SEDIMENT RUNOFF.
12. STABILIZATION - THE CONTRACTOR SHALL STABILIZE ANY AREA WHERE CONSTRUCTION ACTIVITY IS TO BE TEMPORARILY OR PERMANENTLY CEASED FOR MORE THAN 14 DAYS.
13. AREAS SHOWN "TO REMAIN NATURAL" ARE NOT TO BE DISTURBED BY ANY CONSTRUCTION OPERATIONS WITHOUT PRIOR CONSENT OF THE ENGINEER. THESE AREAS WILL SERVE AS NATURAL FILTER STRIPS.
14. ALL EROSION CONTROL MEASURES SHALL REMAIN IN PLACE UNTIL ADEQUATE GROUND COVER IS ESTABLISHED TO PREVENT SILTATION OF DOWNSTREAM WATERWAYS.

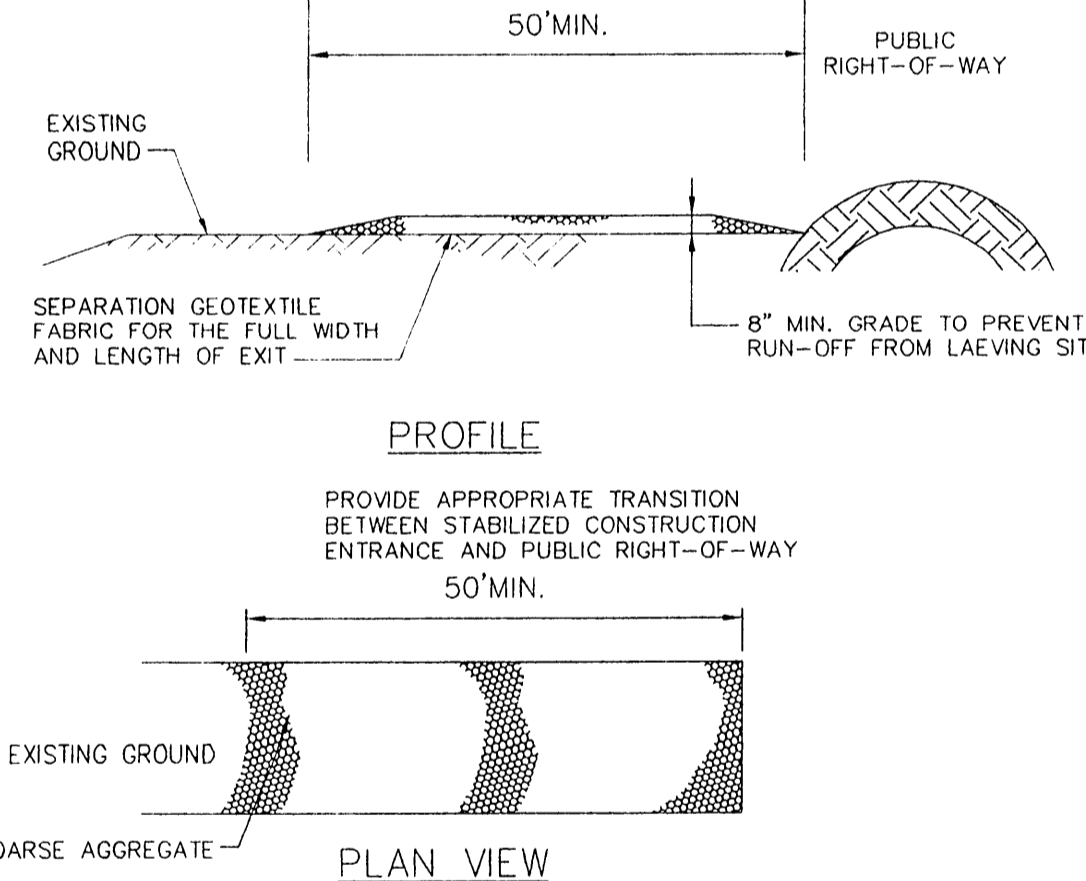

STABILIZED CONSTRUCTION NOTES

1. LENGTH SHALL BE SHOWN ON THE CONSTRUCTION DRAWINGS, BUT NOT LESS THAN 50 FEET.
2. THICKNESS SHALL NOT BE LESS THAN 8 INCHES.
3. WIDTH SHALL NOT BE LESS THAN FULL WIDTH OF ALL POINTS OF INGRESS OR EGRESS.
4. STABILIZATION FOR OTHER AREAS SHALL HAVE THE SAME AGGREGATE THICKNESS AND WIDTH REQUIREMENTS AS THE STABILIZED CONSTRUCTION EXIT, UNLESS OTHERWISE SHOWN ON THE CONSTRUCTION DRAWINGS.
5. STABILIZED AREA MAY BE WIDER OR LONGER TO ACCOMMODATE A TRUCK WASHING AREA, WHEN SHOWN ON THE CONSTRUCTION DRAWING. AN OUTLET SEDIMENT TRAP MUST BE PROVIDED FOR THE TRUCK WASHING AREA.
6. CONTRACTOR SHALL BE RESPONSIBLE FOR PROCURING THE NOI AS REQUIRED.

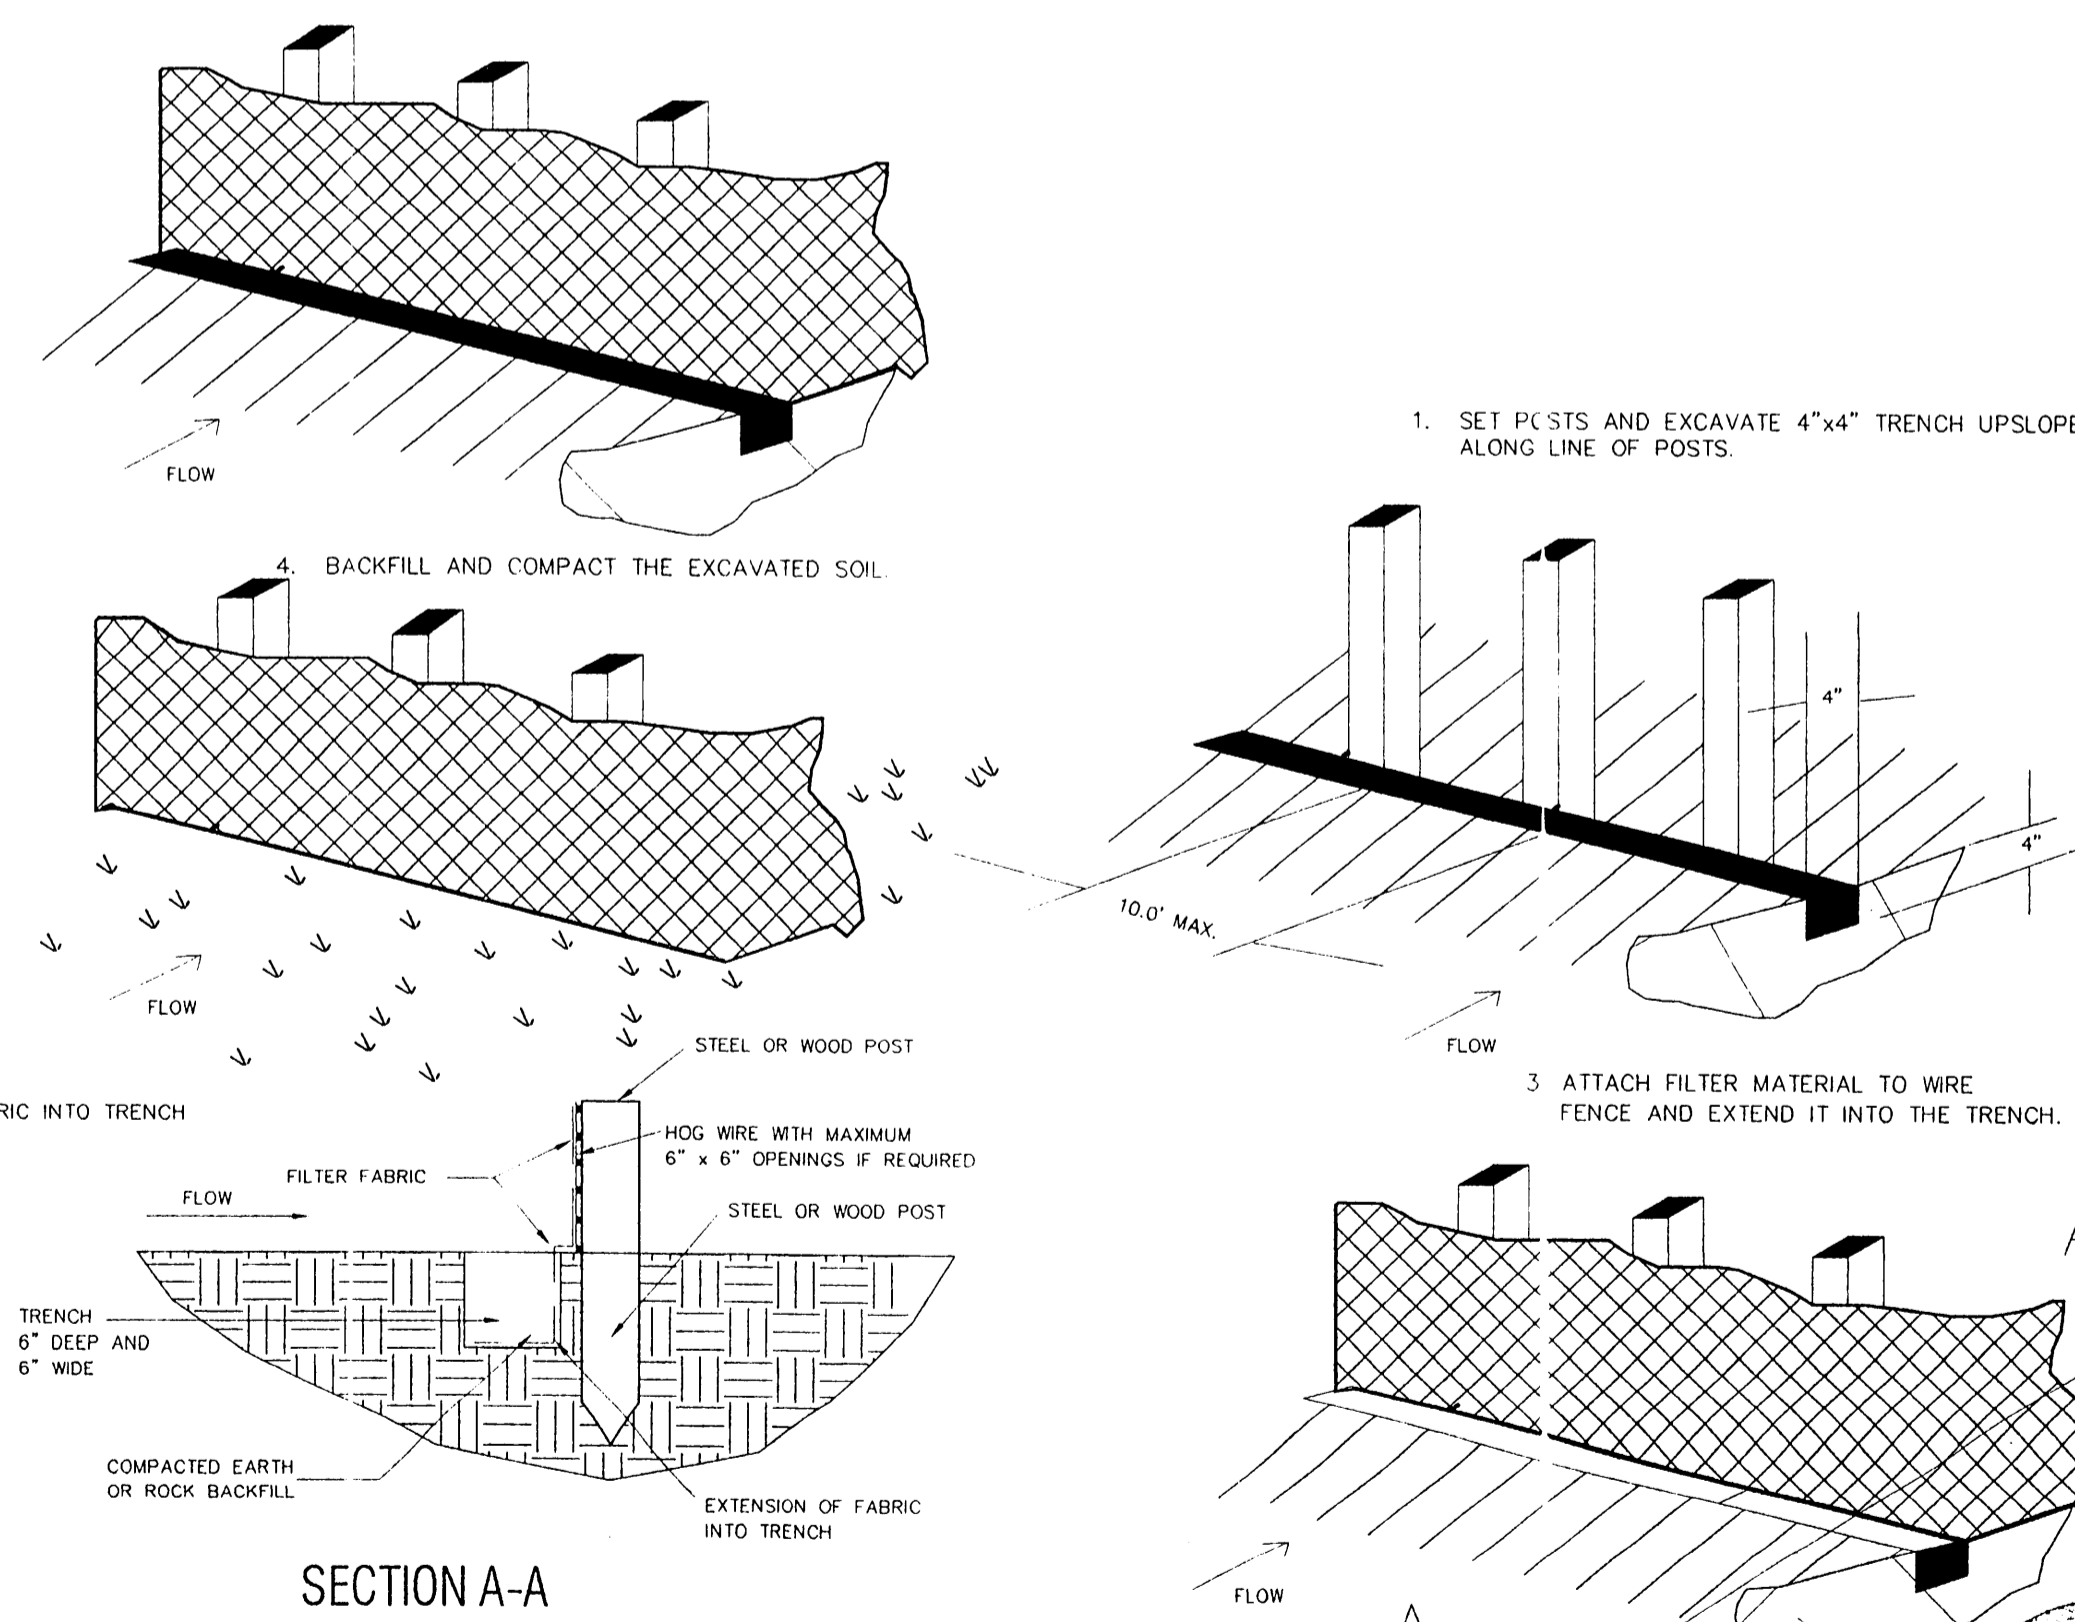

E2 SILT FENCE CONSTRUCTION
NTS

LEGEND

+ETP600.0	EX. TOP OF PVMT.	⊙	WATER VALVE
+ETG600.0	EX. TOP OF GRND.	⊗	UTILITY BOX
+ETC600.0	EX. TOP OF CURB	⊙	WOOD BOLLARD
+600.0	FIN.FLR. SPOT ELEV.	⊙	GAS METER
TP600.0	TOP OF PAVEMENT	⊙	CURB INLET
TC600.0	TOP OF CONCRETE	⊙	GRATE INLET
TG600.0	TOP OF GROUND	⊙	FIRE HYDRANT
600.0	TOP OF CURB	⊙	WATER METER
650	PROP. GRADE LINE	⊙	STORM/SS MANHOLE
-650	EX. GRADE LINE	⊙	TREE
FF	FINISHED FLOOR	⊙	LIGHT POLE
↑	GUY WIRE ANCHOR	⊙	SIGNAL POLE
⊙	POWER POLE	⊙	SIGNAL PULL BOX
b	STREET/CABLE SIGN		

LEGEND

SF	SILT FENCE (SEE DETAIL E2)
	STABILIZED CONSTRUCTION ENTRANCE (SEE DETAIL E1)
	DRAINAGE FLOW ARROW
	STORM DRAIN INLET

dietz engineering




Signing Date: 02.28.01
dietz engineering
 811 e. plano parkway
 suite 109
 plano, texas 75074
 voice: 972 633-8867
 fax: 972 633-1327

Drawn By: LL
 Checked By: RDD

Revisions:

No.	Date	Description

TRINITY CHRISTIAN ACADEMY
 EROSION CONTROL PLAN VIEW
 for the
 City of Addison, Texas



NORTH
 24"x36" Scale: 1" = 20'
 11"x17" Scale: 1" = 40'
 Vertical Scale: NA
 Project Number:
 Issue Date: 28 FEB 2001
 Sheet Title:
EROSION CONTROL PLAN
 Sheet No.:

C1.08