GENERAL NOTES:

1. IT IS THE INTENT OF THE INFORMATION PROVIDED ON THIS SHEET AND WITHIN THE SPECIFICATIONS.

TO BE USED AS GENERAL GUIDELINES TO PRODUCE THE STORM WATER POLLUTION PREVENTION PLAN
FOR THIS PROJECT TO ESTABLISH A MINIMUM BASIS OF COMPLIANCE WITH FEDERAL REGULATIONS.

THE STORM WATER POLLUTION PREVENTION PLAN SHALL MEET THE REQUIREMENTS SET FORTH IN THE
ENVIRONMENTAL PROTECTION AGENCY'S NPDES GENERAL PERMITS FOR STORM WATER DISCHARGES FROM
CONSTRUCTION SITES PUBLISHED IN THE SEPTEMBER 9, 1992 FEDERAL REGISTER.

2. THE STORM WATER POLLUTION PREVENTION PLAN SHOULD ADDRESS THREE GOALS:
DIVERSION OF UPSLOPE WATER AROUND DISTURBED AREAS OF THE SITE;
LIMIT THE EXPOSURE OF DISTURBED AREAS TO THE SHORTEST DURATION POSSIBLE; AND

REMOVAL OF SEDIMENT FROM STORM WATER BEFORE IT LEAVES THE SITE.

3. THE CONTRACTOR SHALL MAKE THE STORM WATER POLLUTION PREVENTION PLAN (SWP3) AVAILABLE, UPON REQUEST, TO EPA.

4. THE CONTRACTOR MUST AMEND THE SWPS PLANS WHENEVER THERE IS A CHANGE IN DESIGN, CONSTRUCTION, OPERATION, OR MAINTENANCE ON THE SITE, OR WHEN THE EXISTING SWP3 PROVES INEFFECTIVE.

MODIFICATIONS INCLUDING DESIGN AND ALL ADDITIONAL MATERIALS AND WORK SHALL BE ACCOMPLISHED

BY THE CONTRACTOR AT NO ADDITIONAL EXPENSE TO THE OWNER.

5. STABILIZATION MEASURES ARE TO BE INSPECTED AT A MINIMUM ONCE EVERY 7 DAYS AND WITHIN 24 HOURS AFTER ANY STORM EVENT GREATER THAN 0.5 INCHES. REPAIRS OF INADEQUACIES REVEALED BY THE INSPECTION MUST BE IMPLEMENTED WITHIN 7 CALENDAR DAYS FOLLOWING THE INSPECTION.

6. AN INSPECTION REPORT THAT SUMMARIZES INSPECTION ACTIVITIES AND IMPLEMENTATION OF THE SWP3

SHALL BE RETAINED AND MADE PART OF THE SWP3.
7. ALL CONTRACTORS AND SUBCONTRACTORS IDENTIFIED IN THE SWP3 MUST CERTIFY AS TO AN UNDERSTANDING

OF THE NPDES GENERAL PERMIT BEFORE CONDUCTING ANY ACTIVITY IDENTIFIED IN THE SWP3.

8. THE CONTRACTOR SHALL ADOPT APPROPRIATE CONSTRUCTION SITE MANAGEMENT PRACTICES TO PREVENT THE DISCHARGE OF OILS, GREASE, PAINTS, GASOLINE, AND OTHER POLLUTANTS TO STORM WATER. APPROPRIATE PRACTICES CAN INCLUDE:

DESIGNATING AREAS FOR EQUIPMENT MAINTENANCE AND REPAIR; REGULAR COLLECTION OF WASTES:

CONVENIENTLY LOCATED WASTE RECEPTACLES; AND

DESIGNATING AND CONTROLLING EQUIPMENT WASHDOWN.

9. THE CONTRACTOR SHALL AMEND OR MODIFY THE SWP3 AS REQUIRED BY CONSTRUCTION MEANS, METHODS AND SEQUENCE. MODIFICATIONS SHALL NOT COMPROMISE THE INTENT OF THE REQUIREMENTS OF THE LAW AND THE SWP3. MODIFICATIONS SHALL NOT BE BASIS FOR ADDITIONAL COST TO THE OWNER.

10. AREAS OF CONSTRUCTION ELSEWHERE ON THE PROJECT SHALL CONFORM TO THE DETAILS SHOWN ON THE PLANS.

11. BORROW AREAS, IF EXCAVATED, SHALL BE PROTECTED AND STABILIZED UTILIZING THE PLAN DETAILS AND SPECIFICATIONS.

ALL WORK SHALL-CONFORM TO GOVERNMENTAL REQUIREMENTS AND BECOME PART OF THE

SWP3. THIS WORK SHALL BE DONE BY THE CONTRACTOR AT NO

ADDITIONAL EXPENSE TO THE OWNER.

12. ALL NON-PAVED AREAS SHALL BE MULCHED AND SEEDED WITH EROSION PROTECTION IMMEDIATELY

UPON COMPLETION OF FINAL GRADING. THIS INCLUDES ALL DITCHES AND EMBANKMENTS. THE CONTRACTOR SHALL

MAINTAIN FINAL GRADING AND KEEP SEEDED AREAS WATERED UNTIL FULLY ESTABLISHED AND ACCEPTED BY OWNER.

13. THE CONTRACTOR SHALL CONSTRUCT A STABILIZED CONSTRUCTION EXIT AT ALL TRAFFIC EXIT POINTS PRIOR

TO EXITING ONTO ANY PAVED ROADWAY. EXIT SHALL BE CONSTRUCTED AS DETAILED ON THIS SHEET AND IN SPECIFICATIONS.

14. THE CONTRACTOR SHALL CONSTRUCT A SILT FENCE AT ALL LOCATIONS SHOWN ON PLANS AND ALL
BORROW AND STOCK PILE AREAS. THE SILT FENCE SHALL BE CONSTRUCTED AS DETAILED ON THIS PLAN & IN SPECIFICATIONS.
15. THE CONTRACTOR SHALL DESIGNATE MATERIAL AND EQUIPMENT STORAGE AREAS MUTUALLY AGREED TO BY OWNER.

THE STORAGE AREAS SHALL BE GRADED FOR POSITIVE DRAINAGE AND THE SURFACE STABILIZED WITH A MINIMUM OF 2 INCHES OF COMPACTED FLEX BASE ON 6 INCHES OF SCARIFIED AND RECOMPACTED SUBGRADE.


A SILT FENCE SHALL BE INSTALED AROUND THE STORAGE AREAS TO PREVENT EROSION FROM LEAVING THE SITE.

16. THE CONTRACTOR SHALL CONSTRUCT A CONSTRUCTION STAGING AND FIELD OFFICE ENTRANCE ROAD AT A LOCATION

MUTUALLY AGREED TO BY OWNER. THE ENTRANCE ROAD SHALL BE STABILIZED WITH A MINIMUM OF 2 INCHES OF

COMPACTED FLEX BASE ON 6 INCHES OF SCARIFIED AND RECOMPACTED SUBGRADE.

17. ALL INLETS (ONSITE AND OFFSITE) RECEIVING DRAINAGE WATER FROM DISTURBED AREAS SHALL BE PROTECTED WITH A SILT FENCE OR HAY BALE DIKE TO PREVENT EROSION FROM BEING TRANSPORTED INTO INLETS.

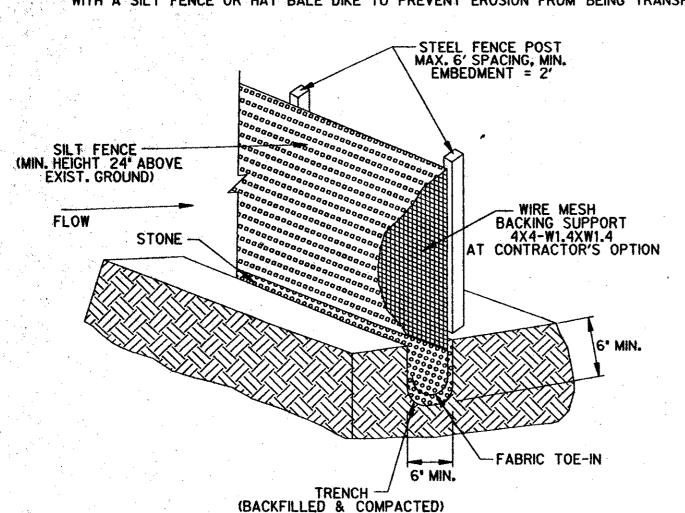

NOTES

1. STEEL POSTS WHICH SUPPORT THE SILT FENCE SHALL BE INSTALLED WITH A SLIGHT ANGLE TOWARD THE ANTICIPATED RUNOFF SOURCE. POST MUST BE EMBEDDED A MINIMUM OF TWO (2) FEET.

2. THE TOE OF THE SILT FENCE SHALL BE TRENCHED IN WITH A SPADE OR MECHANICAL TRENCHER, SO THAT THE DOWNSLOPE FACE OF THE TRENCH IS FLAT AND PERPENDICULAR TO THE LINE OF FLOW. WHERE FENCE CANNOT BE TRENCHED IN (E.G. PAVEMENT), WEIGHT FABRIC FLAP WITH WASHED GRAVEL ON UPHILL SIDE TO PREVENT FLOW UNDER FENCE.

3. THE TRENCH MUST BE A MINIMUM OF 6 INCHES DEEP AND 6 INCHES WIDE TO ALLOW FOR THE SILT FENCE FABRIC TO BE LAID IN THE GROUND AND BACKFILLED WITH COMPACTED MATERIAL.

4. SILT FENCE SHOULD BE SECURELY FASTENED TO EACH STEEL SUPPORT POST OR TO WOVEN WIRE, WHICH IN TURN ATTACHED TO THE STEEL FENCE POST. THERE SHALL BE A 6 INCH DOUBLE OVERLAP, SECURELY FASTENED WHERE ENDS OF FABRIC MEET.

5. SILT FENCE SHALL BE REMOVED WHEN THE SITE IS COMPLETELY STABILIZED

SO AS NOT TO BLOCK OR IMPEDE STORM FLOW OR DRAINAGE.

6. ACCUMULATED SILT SHALL BE REMOVED WHEN IT REACHES A DEPTH OF 6 INCHES THE SILT SHALL BE DISPOSED OF ONSITE IN AN APPROVED LOCATION AND IN SUCH A MANNER AS TO NOT CONTRIBUTE TO ADDITIONAL SILTATION.

SILT FENCE DETAIL

COARSE AGGREGATE AS DETAILED IN SPECIFICATIONS

50'-0' MIN.

GRADE TO PREVENT RUNOFF
FROM LEAVING SITE

EXISTING GRADE

EXISTING GRADE

EXISTING ROADWAY


PROFILE

TRANSITION TO ROADWAY

STABILIZED CONSTRUCTION EXIT


PLAN VIEW

NOTE: CONSTRUCTION ENTRANCE/EXIT TO BE REMOVED WHEN SITE IS COMPLETELY STABILIZED SO AS NOT TO BLOCK OR IMPEDE STORM FLOW OR DRAINAGE.

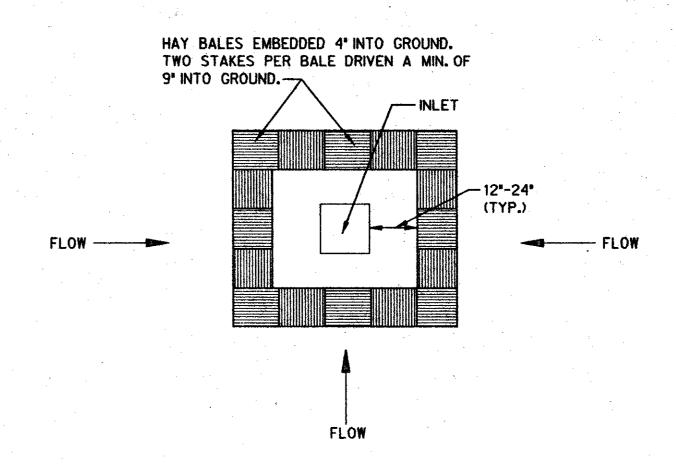


INLET PROTECTION

NOTE: INLET PROTECTION TO BE REMOVED WHEN SITE IS COMPLETELY STABILIZED SO AS NOT TO BLOCK OR IMPEDE STORM FLOW OR DRAINAGE.

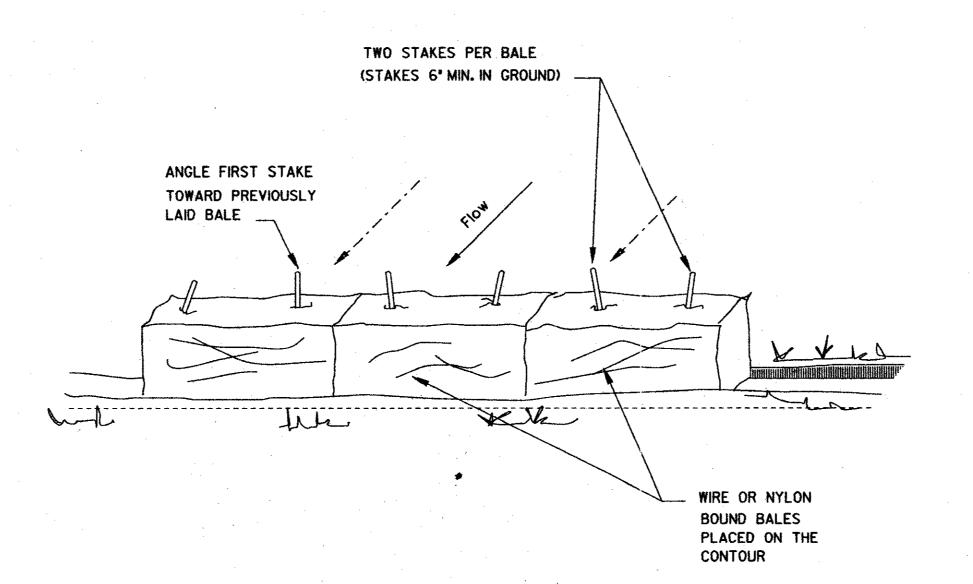

ANCHORING DETAIL FOR HAY BALE DIKE

NOTE: HAY BALE DIKE TO
BE REMOVED WHEN SITE IS
COMPLETELY STABILIZED SO
AS NOT TO BLOCK OR IMPEDE
STORM FLOW OR DRAINAGE.

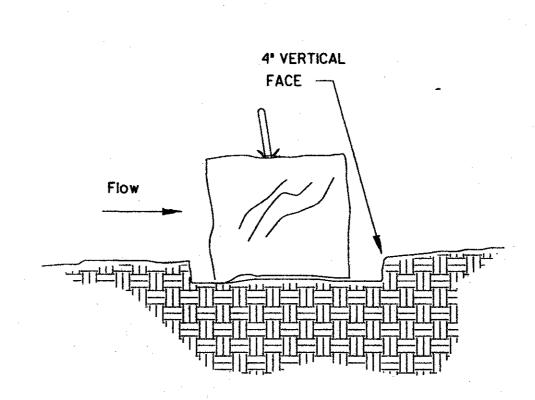

"AS BUILT" DRAWINGS BASED ON INFORMATION

7/28/49 8/7

NOTE

1) THE PLAN SHALL BE IMPLEMENTED, MAINTAINED AND REGULARLY INSPECTED BY CONTRACTOR.

2) THE CONTRACTOR IS RESPONSIBLE FOR SUBMITTING, FOR HIMSELF AND THE OWNER, THE E.P.A. NOTICEOF INTENT (NOI) FORM.



EROSION CONTROL PLAN

ENGLISHMAN'S ANTIQUES

PRITCHARD ASSOCIATES

ADDISON, TEXAS

Halff Associates

ENGINEERS · ARCHITECTS · SCIENTISTS · PLANNERS · SURVEYORS

DESIGN DRAWN DATE SCALE NOTES FILE

DRAWN DATE SCALE NOTES FILE NO.

CADD JUNE 1"= 20' 749er02.dgn 16749 ER-2

PROVIDED BY THE CONTRACTOR