



ISSUED FOR CONSTRUCTION
APRIL 23, 2012

EQUIPMENT SPECIFICATIONS, SHEET 1

© 2012 M. FORD & ASSOCIATES, INC.
THIS DOCUMENT IS PUBLISHED AS AN INSTRUMENT OF SERVICE AND IS GIVEN IN CONFIDENCE. IT REMAINS THE PROPERTY OF M. FORD & ASSOCIATES, INC. ANY REUSE OR DISSEMINATION OF THIS DOCUMENT AND THE INFORMATION CONTAINED THEREIN MAY NOT BE DUPLICATED OR DISCLOSED WITHOUT WRITTEN CONSENT OF M. FORD & ASSOCIATES, INC. HOUSTON, TEXAS

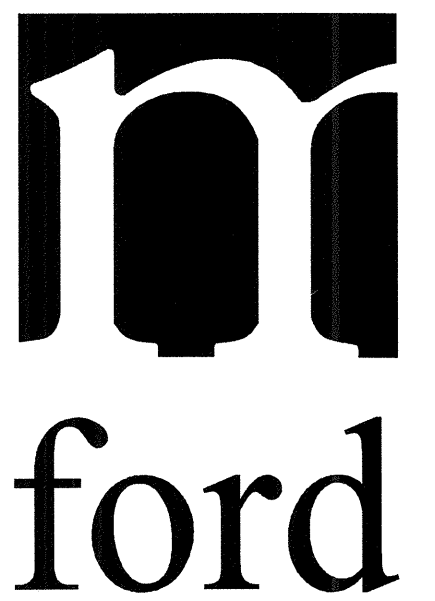

m. ford & associates
interior design
99 detersing street
suite 165
houston, tx 77007
phone 713-630-0800
fax 713-630-0814
mford@mfordassociates.com
www.mfordassociates.com

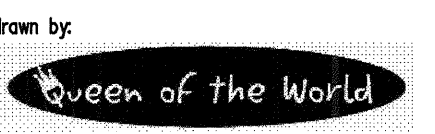

SHEET NO.

ID.4.4

Specifications:

Height	33.25 up to 34.5"
Width	23.75"
Depth	23.56"
Capacity	5.4 cu.ft.
Ext Depth with Handle	24.87"
Interior Height 1	27.79"
Interior Width 1	20.0"
Interior Depth 1	17.5"
Comp Step Height	7.0"
Comp Step Width	20.0"
Comp Step Depth	8.0"
Height Adjustable	True
Shipping Weight	140.0 lbs.
Amps	1.3
Energy Usage/Year	423.0 kWh/Year
UL Electrical Safety	ULC
Canadian Electrical Safety	ULC
Drawers	True
Drawer Quantity	3
Defrost Type	Automatic
Depth with door at 90°	42.5"
Thermostat Type	Dial
Fan Type	Interior and Exterior
Freon Type	R134a
Low Side PSI	70.0
High Side PSI	265.0
Level Legs Quantity	4
Freon Oz	1.8
Compressor Warranty	1 Year
Compressor Warranty	5 Years

REFRIGERATOR MODEL #SP6DSSTB
REMOVE FEET FOR INSTALLATION

3 UNDERCOUNTER DRAWER REFRIGERATOR
NO SCALE

Specifications:

Height	32.0"
Width	23.75"
Depth	23.25"
Capacity	5.5 cu.ft.
Ext Depth with Handle	25.29"
Interior Height 1	27.72"
Interior Width 1	20.0"
Interior Depth 1	17.5"
Comp Step Height	7.0"
Comp Step Width	20.0"
Comp Step Depth	8.0"
Shipping Weight	143.0 lbs.
Amps	1.3
UL Electrical Safety	ULC
Canadian Electrical Safety	ULC
Voltage/Frequency	115 V AC/60 Hz
Reversible	Factory Reversible
Door Swing	RHD
Shelf Quantity	3
Adjustable Shelf	True
Shelf Type	Chrome
Defrost Type	Automatic
Depth with door at 90°	42.0"
Height to Hinge Cap	32.25"
Condenser Location	Rear of Unit
Light	True
Thermostat Type	Dial
Fan Type	Exterior
Level Legs Quantity	4
Freon Type	R134a
Low Side PSI	70.0
High Side PSI	265.0
Freon Oz	1.8
Compressor Warranty	5 Years
Compressor Warranty	1 Year
Sanitization	ETL-S

REFRIGERATOR MODEL #FF7LCSSADA
TWO REQUIRED

2 UNDERCOUNTER REFRIGERATOR
NO SCALE

KitchenAid® Food Waste Disposer

KCDB250G	KCDS100T
KCDI075V	KBDS100T
KCDS075T	

Electrical: This disposer is intended to be direct-wired to the electrical supply. If junction box is used, connect the junction box to the switch on a separate 15- or 20-amp 115 Volt circuit with the appropriate cable. (Use 14 gauge wire with 15-amp circuit, and 12 gauge wire with 20-amp circuit.) This disposer requires a switch marked "Off" position (wired to disconnect all ungrounded supply conductors) installed within sight of the disposer sink opening. (1 hp minimum rating.)

	KCDB250G	KBDS100T	KBDS100T	KBDS100T	KBDS100T
A	6 9/16"	8 1/2"	9"	9"	9"
B	11 1/4"	12 1/4"	12 1/4"	12 1/4"	12 1/4"
C	5 5/8"	5 9/16"	5 9/16"	5 9/16"	5 9/16"
D	4"	4"	4"	4"	4"
E	6"	6 1/4"	6 1/4"	6 1/4"	6 1/4"
F	Dishwasher Drain Connection				

Installations on thicker sinks (such as solid surface, porcelain, or cast iron) may require the use of alternate parts. See instructions below for installation with various thicknesses:

FIGURE A: Thin Sink All Models (< 3/8")

For thin sinks insert backup gasket (D), backup angle (E1) and mounting ring (F). Held in place while inserting the snap ring.

C = Standard Sink Flange
G1 = 1 1/2" screws
G2 = 1 1/8" screws

Whirlpool Corporation policy includes a continuous commitment to improve our products. We reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

W10118955 Rev. A

5 GARBAGE DISPOSER
NO SCALE

Specifications:

Height	32.5"
Width	14.75"
Depth	22.5"
Ext Depth with Handle	25.0"
Interior Height 1	18.5"
Interior Width 1	12.0"
Interior Depth 1	10.0"
Shipping Weight	117.0 lbs.
UL Electrical Safety	UL
Amps	4.8
Voltage/Frequency	115 V AC/60 Hz
Reversible	Yes
Door Swing	LHD
Defrost Type	Automatic
Height to Hinge Cap	32.5"
Depth with door at 90°	37.0"
Condenser Location	Rear of Unit
Thermostat Type	Dial
Low Side PSI	120.0
Freon Type	R134a
High Side PSI	350.0
Freon Oz	6.35
Part/Labor Warranty	1 Year
Compressor Warranty	5 Years

ICE MAKER MODEL #RIM44ADA

4 UNDERCOUNTER ICE MACHINE
NO SCALE

PSB1001N55
GE Profile Advantium® 120 Volt - 27" Wall Oven

Advantium wall ovens/GE Profile cooking tower dimensions and cabinet installation information (in inches)

Note: Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating.

Note: 2" minimum between cutouts when installed above warming drawer or single wall oven.

Installation Information: Before installing, consult installation instructions packed with product for current dimensional data.

A-Allow 1" overlap of oven over top and bottom edges of cutout.
B-Allow 11/16"-3/4" for overlap of oven over side edges of cutout.

Cabinet Width	W	H	D	X	Y	Z
PSB1001/127" Installation	27	26-3/4	19-1/32	21-1/2	25-1/4	17-1/2

2 x 4's or equivalent solid floor

21-5/8" over centerline of cabinet (Must support 130 lbs.)

3/8" MIB bet. oven cutouts recommended - 2" MIN. required

Construct Solid Bottom Min. 3/8" Plywood Support tied by 2x4's on 16" Runners - all Four Sides (Must Support 150 lbs. for Advantium) (Must Support 120 lbs. for Wall Oven)

9-1/4" cut out height 28-1/2" cut out width

2" MIN bet. oven cutouts

1" Min. above track or adjust to oven installation height

GE logo and 'imagination at work' slogan.

Specification Created 11/08 240444

1 UNDERCOUNTER CONVECTION MICROWAVE
NO SCALE